

JUL 2017

10(4)

**RESOLUTION TO EFFECT URGENT REPAIRS TO LADY HAMILTON DRIVE AND LEAS FLAT ROAD - CHANCERY HALL DIVISION**

**WHEREAS** the roadway joining Leas Flat to Lady Hamilton drive is severely damaged;

**AND WHEREAS** the damage is of such magnitude that the road is completely blocked off;

**AND WHEREAS** access to the surrounding communities by residents and utilities has been restricted as a result of the road damage;

**AND WHEREAS** it has been ascertained that the repairs can be done at a cost of Sixteen Million, Four Hundred & Eighty-Seven Thousand, One-Hundred & Twenty Dollars (\$16,487,120.00)

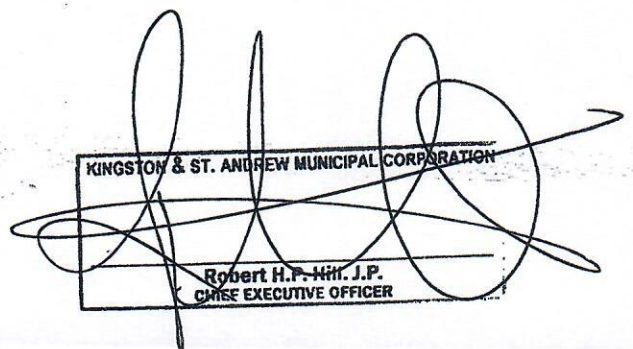
**BE IT RESOLVED** that Kingston and St. Andrew Municipal Corporation (KSAMC) approve the withdrawal of the full sum of Sixteen Million, Four Hundred & Eighty-Seven Thousand, One-Hundred & Twenty Dollars (\$16,487,120.00) from the Equalisation Fund to finance the repairs of said location;

**AND BE IT RESOLVED** that this action be taken with some urgency, to ensure that persons within the surrounding communities be given unrestricted access to their homes as soon as possible.

**MOVED BY: CLLR DUANE SMITH, JP - Chancery Hall Division**

**SECONDED BY: CLLR WINSTON ENNIS - Waterloo Division**

*VERNON McLEOD - LAVERDALE*

  
KINGSTON & ST. ANDREW MUNICIPAL CORPORATION  
Robert H.P. Hill, J.P.  
CHIEF EXECUTIVE OFFICER

Item	Description	Quantity	Unit	Rate	\$ C
<b><u>Drainage</u></b>					
A	Excavate compact earth, reinforce trench and cast with 12mm dia bars and 1:2:4 cc respectively. Construct 600mm * 600mm "U" drain with 200mm blocks and 12mm bars in each blockpocket with all cavities fill with 1:2:4 cc. Steel float finish as directed and install metal grating covers as directed	20	m	25,000.00	500,000.00
B	Excavate compact earth, supply and install 6m len. * 600mm dia HPVC pipes from 900mm * 900mm * 2m inspection chamber to existing inspection chamber as directed	14	ea	270,000.00	3,780,000.00
C	Excavate compact earth, cast and reinforce foundation with 12mm dia bars and 1:2:4cc, construct inspection chamber with 200mm blocks with all cavities fill and steel in every pocket. Erect formwork and cast with 12mm dia bars space 150mm apart and 1:2:4 cc steel finish and cover with heavy metal grating as directed (900mm * 900mm * 2m)	4	ea	300,000.00	1,200,000.00
<b>Drainage Carried to Summary</b>					<b>5,480,000.00</b>