



# CARDINAL COMPLETE HP

## HIGH HUMIDITY PANEL

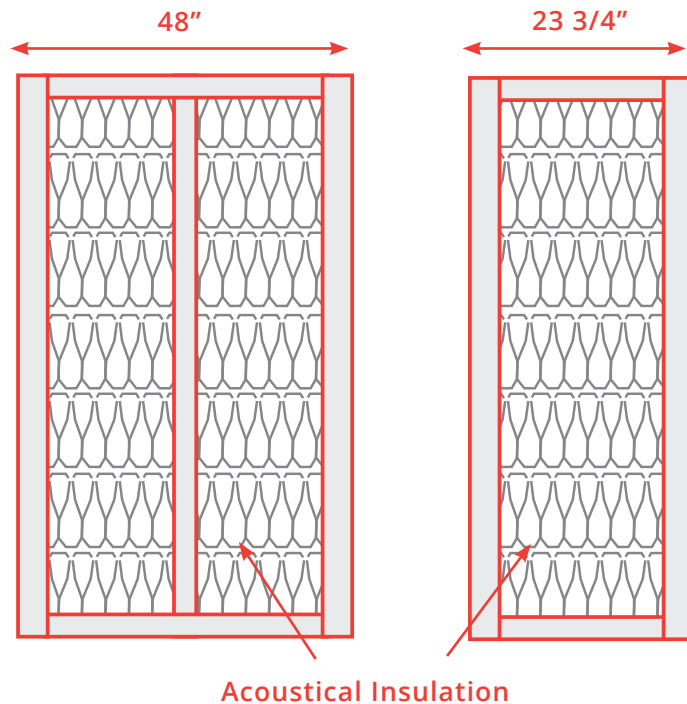

Top View  
Cardinal Complete HP Assembly

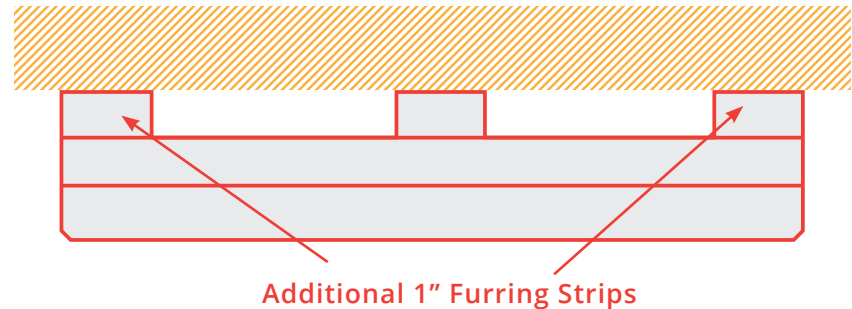

- Additional 1" Furring strips factory installed. Panel ends do not have furring to ensure airflow between wall assembly and the Cardinal Complete HP panel.
- Corrosive resistant screws are recommended for attachment.

### CARDINAL COMPLETE HP

#### HIGH HUMIDITY PANEL

DETAIL NUMBER

1014

SCALE

NTS

REVISED

10/2/22



**CARDINAL**  
ACOUSTICS<sup>®</sup>

AN ACOUSTICAL WOOD FIBER COMPANY

info@cardinalacoustics.com

614.721.3001

[CARDINALACOUSTICS.COM](http://CARDINALACOUSTICS.COM)

#### OFFICE HEADQUARTERS

2941 Donnylane Blvd.  
Columbus, OH 43235

#### MANUFACTURING & FABRICATION PLANT

2000 S. Yellow Springs St.  
Springfield, OH 45506