


ACP375
Performance Monolayer CPP Film Series

General Description

ACP375 is a monolayer CPP film that offers exceptional clarity & gloss combined with enhanced heat sealing performance. The higher tensile strength and lower modulus values offer both aesthetic and processing benefits for some applications.

TYPICAL PHYSICAL PROPERTIES (1.0MIL FILM)

PROPERTY	Units	ASTM Test#	Typical Value
Haze	%	D1003	1.5
Gloss	45 ⁰	D2457	85
Ultimate Tensile MD TD	psi	D882	8,000 6,300
Ultimate Elongation MD TD	%	D882	650 700
Secant Modulus MD TD	psi	D882	65,000 60,000
Coefficient Of Friction	gms	D1894	<.30
Yield	in ² /lb		30,800

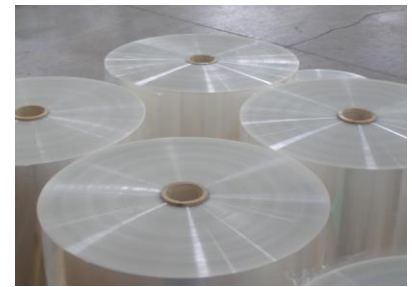

ACP375 2-side sealable, slip modified.

Regulatory Compliance

- FDA 21 CFR 177.1520 (c)3.1a food contact only.
- USPS –T-3204 Polywrap mailer overwrap.

TECHNICAL INFORMATION, RECOMMENDATIONS AND SUGGESTIONS HEREIN ARE FURNISHED WITHOUT CHARGE OR OBLIGATION. NO GUARANTEE IS MADE OF THEIR ACCURACY AND COPOL INTERNATIONAL LTD. ACCEPTS NO RESPONSIBILITY FOR RESULTS OBTAINED BY THE APPLICATION OF THIS INFORMATION OR THE SAFETY & SUITABILITY OF OUR PRODUCTS EITHER ALONE OR IN COMBINATION WITH OTHER PRODUCTS.

VALUES ARE TYPICAL DATA AND SHOULD NOT BE INTERPRETED AS SPECIFICATIONS BECAUSE CONDITIONS MAY VARY AND ARE BEYOND OUR CONTROL, USERS ARE ADVISED TO MAKE THEIR OWN DETERMINATION OF THE SAFETY AND SUITABILITY OF EACH PRODUCT IN THEIR OWN APPLICATION.

THERE IS NO WARRANTY AGAINST PATENT INFRINGEMENT. ALL PROPERTIES AND APPLICATIONS ARE PROVIDED AS INFORMATION ONLY AND THERE ARE NO WARRANTIES EXPRESSED OR IMPLIED OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE.