


Flat Tank 160 *(fresh or waste water applications)*

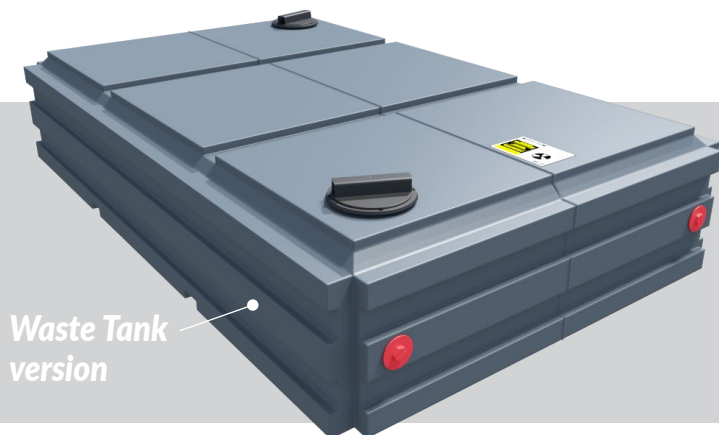

So much **better** than a steel tank

Water Applications

If you're always running out of water for your jobs, it's time to use our robust, lightweight, plastic **Flat Tank 160**. Not prone to unsightly rust, the **Flat Tank 160** is easy to move, install and clean: ideal for sanitation professionals, window/wheelie bin cleaning companies and domestic rainwater harvesting.

It's child's play to connect a petrol-driven pressure washer or an electric / petrol-driven water pump with a hose reel to dispense water accurately and precisely.

Waste Applications

Alternatively, should you need to capture the waste from a small toilet unit, shower block or catering facility, and space is at a premium, the **Flat Tank 160** will be the product of choice.

Technical Data*

Height:	400mm	Width:	1100mm
Length:	1870mm	Dry Weight:	40KGs
Volume:	160 gallons / 725 litres		


*We reserve the right to amend the technical specification to improve the product without prior notification.

Technical Advantages

- Empty, dry weight 40KGs
- Full, wet weight 765KGs
- 2 x 2" ports to attach to additional equipment
- Adaptable, rust-free, hygienic
- Flexible positioning for 5" waste ports
- Multiple applications
- Many upgrade options

Plan View

Long Side View

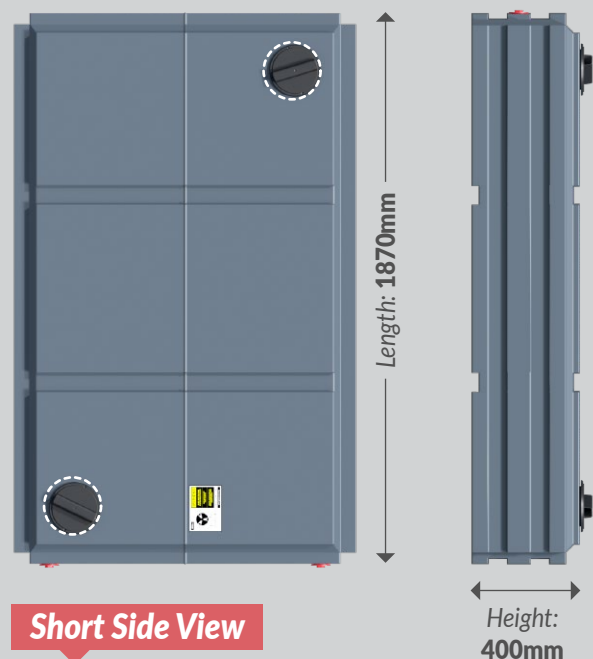

Short Side View

Plan View shown with 2 optional waste ports positioned at customer's request.



Flat Tank 160 (fresh or waste water applications)

Technical Details*

Flat Tank - the first, and still the best.

Detail	FT-500	FT-750	FT-160
Volume (Litres / Gallons)	2,273 / 500	3,410 / 750	725 / 160
Length (mm)	3,100 mm		1,870 mm
Width (mm)	2,100 mm		1,100 mm
Height (mm) - see Note 1	485 mm	690 mm	400 mm
Dry Weight (KG) - ONLY MOVE, LIFT OR STACK WHEN EMPTY	140 KG	180 KG	40 KG
Wet Weight (KG)	2,413 KG	3,590 KG	765 KG
Flush capacity [@ 4 litre cistern flush]	567 flushes	854 flushes	181 flushes
Flush capacity [@ 6 litre cistern flush]	378 flushes	569 flushes	120 flushes
Shower capacity [@ 40 litres / shower] - see Note 2	57 showers	85 showers	18 showers
Elsan® Cartridge Empties [@ 12 litre chamber] - see Note 3	189 empties	284 empties	60 empties
Elsan® Cartridge Empties [@ 15 litre chamber]	151 empties	227 empties	48 empties
Elsan® Cartridge Empties [@ 21 litre chamber]	108 empties	162 empties	34 empties
High Level Alarm available	For all tanks		
Alarm (when fitted) notification at	1,929 litres	2,904 litres	543 litres
Linking Kits available	Side-to-side or nose-to-tail - for all tanks		
Standard Colour	Black		Dark Grey
	Further Details:		
Note 1: Please allow clearance above tank for connecting inlet pipework e.g. 110mm	2 x Ø 5" / 125mm hatches with screw cap		Optional
Note 2: Average shower duration is 5 to 8 minutes @ 8 litres flow per minute	2 x Ø 12" / 300mm hatches with screw cap		Not available
Note 3: Each user will create an average of 2½ litres of toilet waste per day	4 x inbuilt lifting handles and sling guides		Not available
	Deep forklift slots		Not available
	Transportable and stackable when empty - lay flat or on long edges		

***Please note:** tank sizes quoted are subject to a +/-3% variation. We reserve the right to amend the technical specification to improve the product without prior notification. Plastic process and material guarantee: 2 years based on UV8. This guarantee excludes damage due to wear & tear and misuse.