

Waste Tank Odour Trap & Breather Kit



A *practical* two-way vent and odour trap for waste tanks

The waste tank **Odour Trap & Breather Kit** is a compact and robust two-way vent / air admittance valve. When fitted to a tank, its sturdy, replaceable filter is designed to eliminate bad odours in outdoor drainage applications.

Applications: *Waste Tanks, Septic Tanks, Grease Separators and Sewage Treatment Plants*

The main odour trap "body" contains a replaceable active carbon filter that operates as a two-way vent, filtering air in both directions. The odour trap's robust, low-profile design means it can be used vertically or horizontally and can be installed in hard-to-reach places. An initial filter cartridge is included as standard and should be replaced when saturated.

Technical Data*

Temperature Range:	-20°C to +60°C
Cap & Base Diameter:	130mm (cap) / 110mm (base)
Height:	135mm
Projection above tank:	90-135mm (when fitted)

*We reserve the right to amend the technical specification to improve the product without prior notification.

Technical Advantages

- Resilient exterior for longevity
- Can be retrofitted to many waste tanks
- Push-fit connector - no specialist installation
- Easy filter replacement by lifting the cap


Accessories

- Replacement filter / cartridge



Carbon Filter (Cover removed)

The full kit also includes **a tank adaptor** to allow a tight seal when fitting the odour trap. To connect 4" waste pipework into the tank, we also recommend our **WC-Connector Kit**.

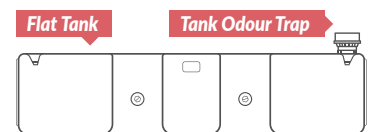

Fitting: e.g. for Flat Tank & Mini Flat Tank

1. Remove existing 5" lid and collar from tank
2. Using the self-tapping screws (removed above) fit brown tank adaptor to exposed 5" hole.
3. Push fit odour trap into 5" tank adaptor.
4. Replace filter every 24 months, as a minimum

Associated product: WC-Connector Kit

