

Mini Tank (waste or water applications)



Technical Advantages

- Empty, dry weight 40KGs
- Full, wet weight 765KGs
- 2 x 2" ports to attach to additional equipment
- Adaptable, rust-free, hygienic
- Flexible positioning for 5" waste ports
- Multiple applications
- Many upgrade options

A 725 litre tank for smaller sites and applications

Water Applications

If you're always running out of water for your jobs, it's time to use our robust, lightweight, plastic **725 litre tank**. Not prone to unsightly rust, this tank is easy to move, install and clean: ideal for sanitation professionals, window/wheelie bin cleaning companies and domestic rainwater harvesting.

It's child's play to connect a petrol-driven pressure washer or an electric / petrol-driven water pump with a hose reel to dispense water accurately and precisely.

Waste Applications


Should you need to capture the waste from a small toilet unit, shower block or catering facility, and space is at a premium, this tank will be the product of choice.

Technical Data*


Height:	400mm	Width:	1100mm
Length:	1870mm	Dry Weight:	40KGs
Volume:	160 gallons / 725 litres		

*We reserve the right to amend the technical specification to improve the product without prior notification.

Plan View

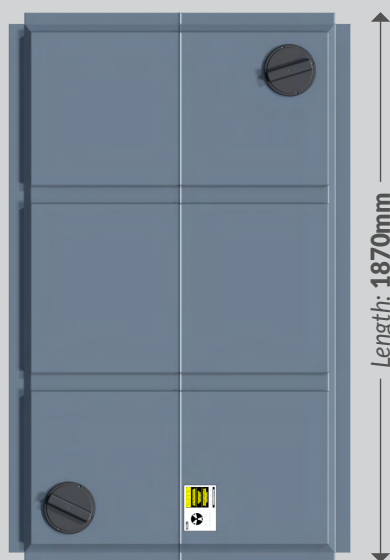


Long Side View



Length: 1870mm

Height: 400mm

Short Side View



Width: 1100mm

2 x 2" Inlets



Plan View shown with 2 optional waste ports positioned at customer's request.

Mini Tank *(waste or water applications)*

Applications

Portable Sanitation Industry:

Extra water capacity for:

- topping up site welfare units
- topping up non-potable water tanks
- filling toilet sinks
- carrying out a more intensive clean on site

Waste capture for construction and events

Call us on 0800 334 5742 for water pump and pressure washer options

Window and wheelie bin-cleaning industries

Mount the Mini Tuff Tank on your truck, connect to a suitable pump and your cleaning equipment

Rainwater harvesting:

Fits flat against a wall next to your downpipe
 Diverter valve fittings available to connect to square or circular pipes
 Taps or pumps available as optional extras

And much more...

Campsite toilet waste tipping point
 Pleasure boat toilet waste tipping point
 Catering industry waste oil collection
 Municipal refuse site waste oil collection



Waste Water / Grey Water Holding Tank

Capture waste from toilet units, catering trailers and shower blocks or use as an Elsan® tipping point.




Tank Linking Kits

Water Tank

Carry extra water and connect to a manual drain, pressure washer or water pump for a multitude of applications.
 Also suitable as a rainwater harvesting tank in domestic / garden situations.



Pressure Washer

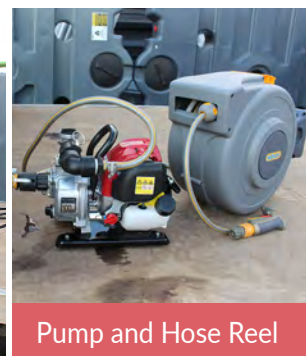

Pump and Hose Reel


Tank Accessories:

- Rainwater Diverter Kit and garden / garage pump
- 1" Honda petrol driven water pump and hose reel
- Pressure washer with spray gun and lance

Mini Tank (waste or water applications)

Waste Applications

For waste tank applications customers can choose their own location for (typically) 2 x 5" waste ports: one for waste inlet, one for waste extraction. **Please indicate your preferred positioning below.** You may add additional ports if, for example, you wish to add optional equipment, such as a Tank Breather Kit or a Toilet Connector Kit etc.

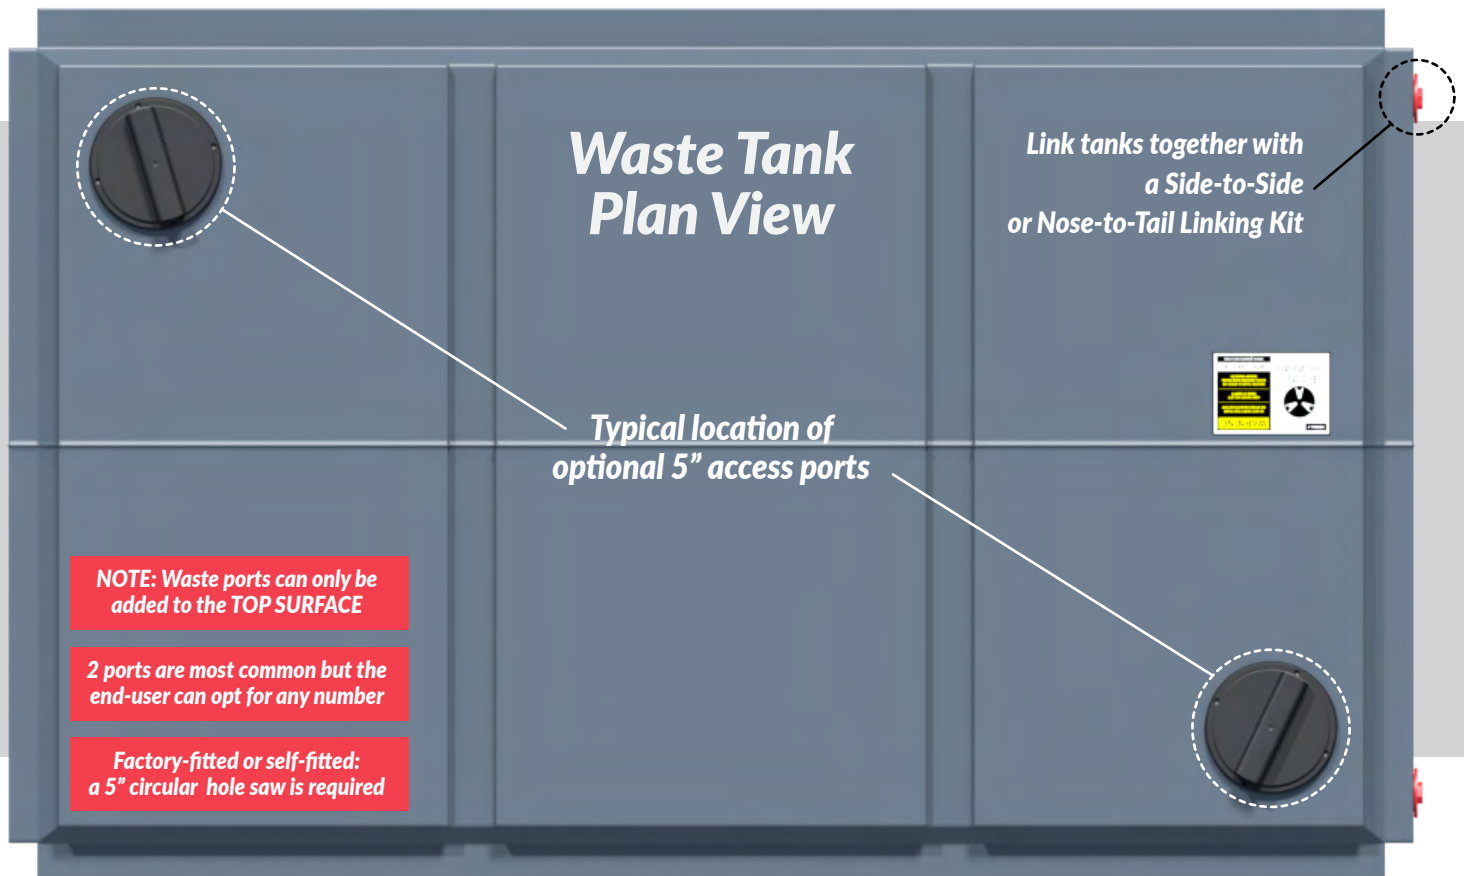

Water Applications

It's child's play to connect a petrol-driven pressure washer or an electric / petrol-driven water pump with a hose reel to dispense water accurately and precisely.

You can even harvest rainwater from your back garden!



Contact us for more information.

Mini Tank (waste or water applications)

Technical Details*

Detail	TT-500	TT-750	MTT-160
Volume (Litres / Gallons)	2,273 / 500	3,410 / 750	725 / 160
Length (mm)	3,100 mm		1,870 mm
Width (mm)	2,100 mm		1,100 mm
Height (mm) - see Note 1	485 mm	690 mm	400 mm
Dry Weight (KG) - ONLY MOVE, LIFT OR STACK WHEN EMPTY	140 KG	180 KG	40 KG
Wet Weight (KG)	2,413 KG	3,590 KG	765 KG
Flush capacity [@ 4 litre cistern flush]	567 flushes	854 flushes	181 flushes
Flush capacity [@ 6 litre cistern flush]	378 flushes	569 flushes	120 flushes
Shower capacity [@ 40 litres / shower] - see Note 2	57 showers	85 showers	18 showers
Elsan® Cartridge Empties [@ 12 litre chamber] - see Note 3	189 empties	284 empties	60 empties
Elsan® Cartridge Empties [@ 15 litre chamber]	151 empties	227 empties	48 empties
Elsan® Cartridge Empties [@ 21 litre chamber]	108 empties	162 empties	34 empties
High Level Alarm available	For all tanks		
Alarm (when fitted) notification at	1,929 litres	2,904 litres	543 litres
Linking Kits available	Side-to-side or nose-to-tail - for all tanks		
Standard Colour	Black		Dark Grey
	Further Details:		
Note 1: Please allow clearance above tank for connecting inlet pipework e.g. 110mm	2 x Ø 5" / 125mm hatches with screw cap		Optional
Note 2: Average shower duration is 5 to 8 minutes @ 8 litres flow per minute	2 x Ø 12" / 300mm hatches with screw cap		Not available
Note 3: Each user will create an average of 2½ litres of toilet waste per day	4 x inbuilt lifting handles and sling guides		Not available
	Deep forklift slots		Not available
	Transportable and stackable when empty - flat or long edges		

***Please note:** tank sizes quoted are subject to a +/-3% variation. We reserve the right to amend the technical specification to improve the product without prior notification. Plastic process and material guarantee: 2 years based on UV8. This guarantee excludes damage due to misuse.