

	<b>KSSA1.0-RD</b> Semi-automatic random	<b>KSSA1.0-RDH</b> Semi-automatic random	<b>KSA2.0-SB</b> Automatic	<b>KSA2.0-TB</b> Automatic	<b>KSA2.0-RD</b> Automatic random
<b>Key additional features</b>	<ul style="list-style-type: none"><li>• Side belt driven</li><li>• Adjusted automatically for many different box sizes</li><li>• With search height sensor</li></ul>	<ul style="list-style-type: none"><li>• Side and top belt driven</li><li>• Adjusted automatically for many different box sizes</li><li>• Suitable for heavier loads, up to 35kg</li><li>With search height sensor</li></ul>	<ul style="list-style-type: none"><li>• Side belt driven</li><li>• Pneumatic top flaps folding</li><li>• Suitable for many different variety of general boxes</li></ul>	<ul style="list-style-type: none"><li>• Side and top belt driven</li><li>• Pneumatic top flaps folding</li><li>• Suitable for big and heavy boxes</li></ul>	<ul style="list-style-type: none"><li>• Side belt driven</li><li>• Pneumatic top flaps folding</li><li>• Suitable for many different variety of general boxes</li><li>• Adjusted automatically for many different box sizes</li><li>• PLC control</li></ul>
Power supply	1ph, 120V	1ph, 120V	1ph, 120V	1ph, 120V	1ph, 120V
Min. box dimensions L x W x H	6" x 5" x 4.5"	6" x 5" x 4.5"	8" x 5.5" x 5"	10" x 5" x 6"	11" x 5.5" x 6"
Max. box dimensions L x W x H	∞ x 19.5" x 19.5"	∞ x 19.5" x 19.5"	23.5" x 19.5" x 19.5"	19.5" x 19.5" x 19.5"	19.5" x 19.5" x 19.5"
Tape width	2"	2"	2"	2"	2"
Working height	22.5" to 30"	22.5" to 30"	22.5" to 30"	22.5" to 30"	22.5" to 30"
Conveyor speed (ft/m)	65	65	65	65	65
Machine dimensions L x W x H	50" x 36" x 52"	50" x 36" x 52"	75" x 38" x 64"	78" x 38" x 64"	78" x 38" x 64"
Air requirements (PSI)	85	85	85	85	85
<b>OPTIONS</b>					
Infeed and outfeed conveyor - 20" long	✓	✓	✓	✓	✓
3" tape head	✓	✓	✓	✓	✓
No tape alarm	✓	✓	✓	✓	✓
Safety doors with auto stop	✓	✓	✓	✓	✓
Stainless steel upgrade	✓	✓	✓	✓	✓
Case format keeper (memory mode)	✓	✓			✓
Custom case dimensions	✓	✓	✓	✓	✓
Labeler integration	✓	✓	✓	✓	✓
Printer integration	✓	✓	✓	✓	✓


<b>KESA3.0</b> Semi-automatic case erector			
<ul style="list-style-type: none"><li>• Fully pneumatic driven</li><li>• Adjusted manually for uniform or different box sizes by crank handle</li><li>• Could connect to any case sealer, it enables one person to form, pack and seal corrugated cases in a single operation</li></ul>		<ul style="list-style-type: none"><li>• Folds minor and major flaps and holds the case steady while packaging</li><li>• Press a push button to release the push-device to move cases to a case sealer after packaging</li><li>• Adjustable leg supports to change working table height</li></ul>	
Power supply	N/A	Working height	22.5" to 30"
Min. box dim. L x W x H	8" x 6" x 4"	Machine dim. L x W x H	85" x 40" x 40"
Max. box dim. L x W x H	23.5" x 19.5" x 19.5"	Air requirements (PSI)	49
<b>OPTIONS</b>			
Stainless steel upgrade	✓	Custom case dimensions	✓

<b>KEA4.0</b> Automatic case erector			
<ul style="list-style-type: none"><li>• Vertical case former</li><li>• Side belt driven</li><li>• For all general type of corrugated boxes</li><li>• To open the box then seal the bottom flaps</li><li>• PLC controlled</li><li>• HMI control panel</li><li>• Light tower</li><li>• Section cup system</li></ul>		<ul style="list-style-type: none"><li>• Easy adjustment for fixed format cases by handwheels</li><li>• Aluminum frame and acrylic safety fence with shut-off device</li><li>• High speed &amp; durable taping head - bottom tape</li><li>• Brush wipe down</li><li>• Detection for low-quality of boxes</li><li>• Reverse feeding direction is available by request</li></ul>	
Power supply	1ph, 120V	Working height	22.5" to 30"
Min. box dim. L x W x H	6" x 5" x 4.5"	Conveyor speed (ft/m)	65
Max. box dim. L x W x H	∞ x 19.5" x 19.5"	Machine dim. L x W x H	50" x 36" x 52"
Tape width	2"	Air requirements (PSI)	85
<b>OPTIONS</b>			
No tape alarm	✓	3" tape head	✓
Safety doors with auto stop	✓	Custom case dimensions	✓
Stainless steel upgrade	✓	Labeler integration	✓




CASE-IT  
SERIES

An effortless solution  
for **case handling**.

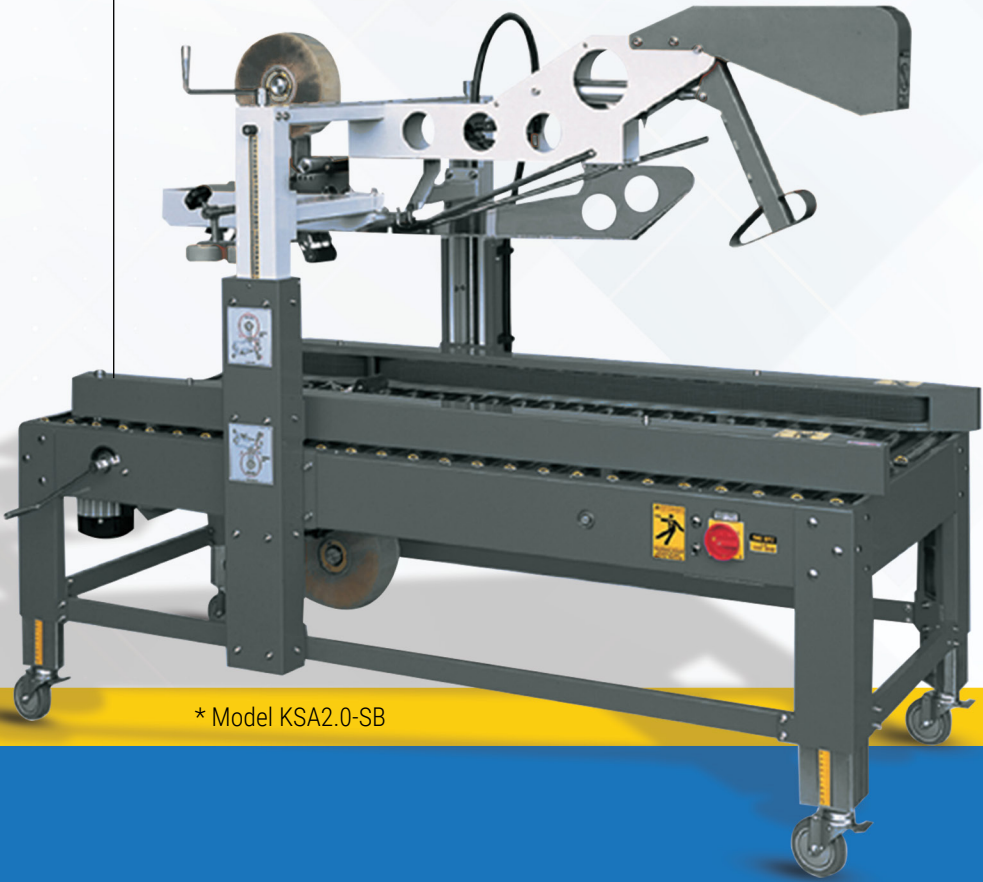

\* Model KSA2.0-SB






# Technical features



\* Model KSSA1.0-RDH

## A complete system

The **CASE-IT series** offers a wide range of case sealing and erecting systems. Their compact size and high reliability make them a very popular product. Simple and easy to use machine with ergonomic features to cover a vast range of industries: cosmetic, pharmaceutical, food, beverage, industrial product. The motorized belt conveyor eases the product transfer into the taping heads for the ultimate seal with the top squeezers.

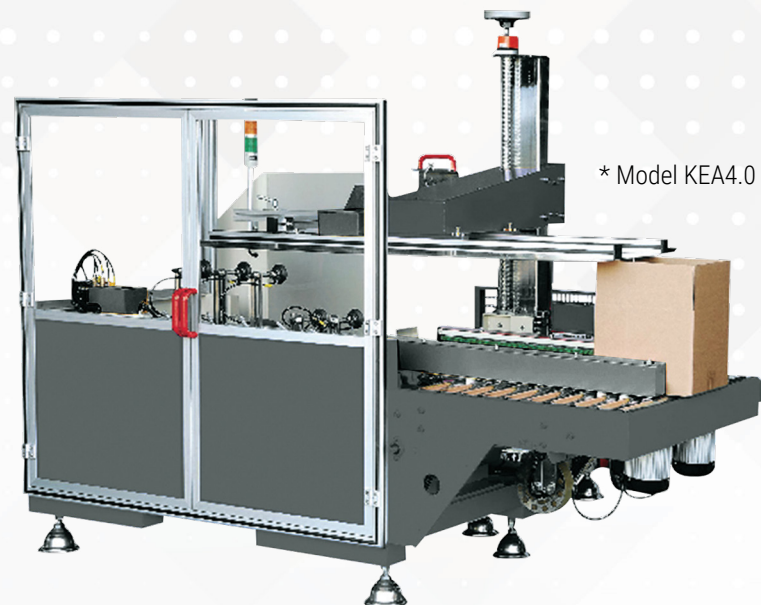


\* Model KEA4.0

## Base model key attributes

- ▶ Adjust manually for uniform or different box sizes by crank handle
- ▶ High speed and durable taping head
- ▶ Locking casters
- ▶ Dual telescoping mast with cushion
- ▶ Both side compression rollers
- ▶ Stainless roller table
- ▶ Easy operation and easy maintenance



\* Model KSSA1.0-SB

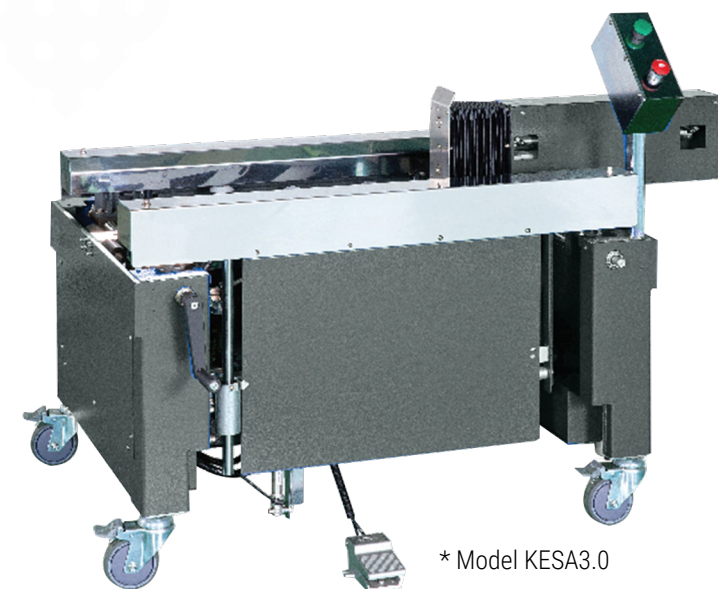

\* Model KESA3.0



“  
**Forming and sealing**  
cases made easy.