


- 1. WOOD BLOCKING SHALL BE A MIN. 1" X 6" TREATED D.F. OR REDWOOD LAGGED INTO ROOF DECK
 2. 24 GA. GALVANIZED BLOCK COVERS WITH ALL JOINTS SOLDERED 2: LARGER ALL DIMENSIONS WITH 1 1/2" TURNDOWN
 3. SPRAY APPLIED POLYURETHANE ROOF INSULATION (TECH-GUARD)
 4. TECH GUARD COATING SYSTEM (PRO-TECH)

SCREEN BLOCK

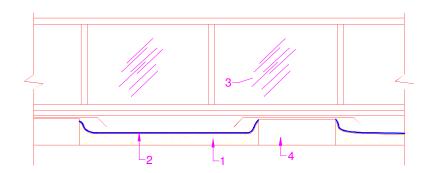

- POLYURETHANE ROOF INSULATION (TECH GUARD)
 TECH GUARD COATING SYSTEM (PRO-TECH)
 SITE SCREEN

- 4. RAISED BLOCK AND METAL COVER MECHANICALLY ATTACHED TO DECK

SITE SCREEN

projech	SITE SCREEN MOUNTING BLOCKS (dwg. 13)	DRAWN BY:	DRAWN BY:	APPROVED:
	3003 NORTH 73RD STREET, SCOTTSDALE, AZ 85251 402 EAST GRAND ROAD, TUCSON, AZ 85705	SCALE:	PROJECT NO:	DRAWING NO: