


CARDINAL BAFFLES

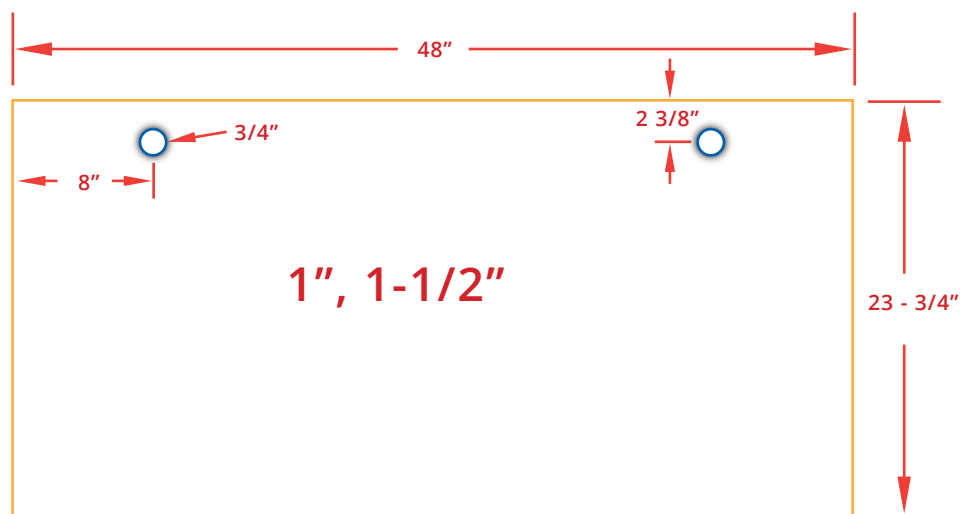

Cardinal Acoustics uses a section of 3/4" o.d., 1/2" i.d. PVC pipe for 1" and 1-1/2" baffles. PVC is inserted in 3/4" holes located as shown.

TOLERANCES ON WIDTH & HEIGHT
+/- 3/32"
Maximum recommended width - 48"

TOLERANCES ON THICKNESS
+/- 1/16"

HEIGHTS
Maximum 24"

CARDINAL BAFFLES

DETAIL NUMBER

1010

SCALE

NTS

REVISED

10/2/22



CARDINAL
ACOUSTICS

AN ACOUSTICAL WOOD FIBER COMPANY

info@cardinalacoustics.com

614.721.3001

CARDINALACOUSTICS.COM

OFFICE HEADQUARTERS

2941 Donnylane Blvd.
Columbus, OH 43235

MANUFACTURING & FABRICATION PLANT

2000 S. Yellow Springs St.
Springfield, OH 45506