

Meridian™

Seating Capacity.....	7 Adults
Dimensions	91.25" x 91.25" x 36", (232 cm x 232 cm x 91 cm)
Corner Radius.....	9" (23 cm)
Dry Weight.....	730 lbs (331 kg)
Filled Weight (Average Fill).....	3,859 lbs (1,750 kg)
Water Capacity (Average Fill)	375 US gallons (1,420 Liters)
Shipping Weight	730 lbs (331 kg)
Export Shipping Weight:.....	780 lbs (354 kg)
Electronic Controls	Programmable digital panel with LED readout
Pump 1	North America (60 Hz): 2-Speed, 4.0 HP break, 2.5 HP continuous, 48 Frame
Export (50 Hz):	2-Speed, 2.0 HP continuous
Pump 2.....	North America (60 Hz): 1-Speed, 4.0 HP break, 2.0 HP continuous, 48 Frame
Export (50 Hz):	1-Speed, 2.0 HP continuous
Circulation Pump.....	Optional with ClearZone® Pro package
Filtration (factory default)	2 Cycles for a total of 2 hours
Heater	4.0 kW
Export (50Hz)	3.0 kW
Total @Home Jets	45
Seat 1 Jets.....	2 Mini Storm Directional, 1 Power Storm Twister, 2 Mini Storm Rifled
Seat 2 Jets.....	4 Cluster Storm Rifled, 1 Turbo Jet (sidewall)
Seat 3 Jets.....	2 Power Storm Rifled, 4 Mini Storm Rifled
Seat 4 Jets.....	1 Mini Storm Rifled, 2 Cluster Storm Directional
Seat 5 Jets.....	4 Mini Storm Rotator, 2 Mini Storm Directional, 2 Power Storm Twirl, 2 Pillow Mini Directional
Seat 6 Jets.....	5 Mini Storm Rotator, 1 Power Storm Twister, 2 Pillow Mini Directional
Footwell (7).....	8 Cluster Storm Directional
Massage Selectors	1
Special Features	2 Jet Therapy Pillow, Tactile Therapy
Water Management System.....	One 75 ft filter cartridge; 8" Weir
Optional	ClearZone® Pro Water Purification System
LED Lighting	One multi Color LED footwell light
Optional	Crystal FX™
Synthetic Cabinet Colors.....	Adobe Tan, Stoneridge Grey,
Terracina™ Cabinet (Optional)	Driftwood, Vintage Cedar, Midnight Maple
Acrylic Colors	Moonstone, UltraLife, Sunstone, Smoked Marble, UltraLife Gray, Desert Stone
Headrests	3 (1 standard; 2 Jet Therapy Pillow)
Water Feature.....	Water fountain with independent flow rate (on or off) adjustment; powered by pump 1
Electrical Requirements:	North America (60 Hz): 240 VAC@30A or 40A Export (50 Hz): 230 VAC@1x32A, 2x16A, 3x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs
Warranty*.....	North America (60 Hz): Lifetime for UltraLife Shell Surface, 5 Years Acrylic Shell Surface, 3 Years Plumbing, 3 Years Equipment and Controls, 7 Years Cabinet, 1 Year Water Purification System, 2 Years for Jet Insert, 1 Year for Jet Escutcheon, 1 Year Lights; Export (50 Hz): 10 Years for UltraLife Shell Surface, 5 Years Acrylic Shell Surface, 2 Years Plumbing, 2 Years Equipment and Controls, 2 Years Cabinet, 1 Year Water Purification System, 2 Years for Jet Insert, 1 Year for Jet Escutcheon, 1 Year Lights
Audio System (Optional).....	N/A




**Optional
escutcheon jets**

*(See Warranty Document for Specific Details)

Meridian

Massage Selector Diagram

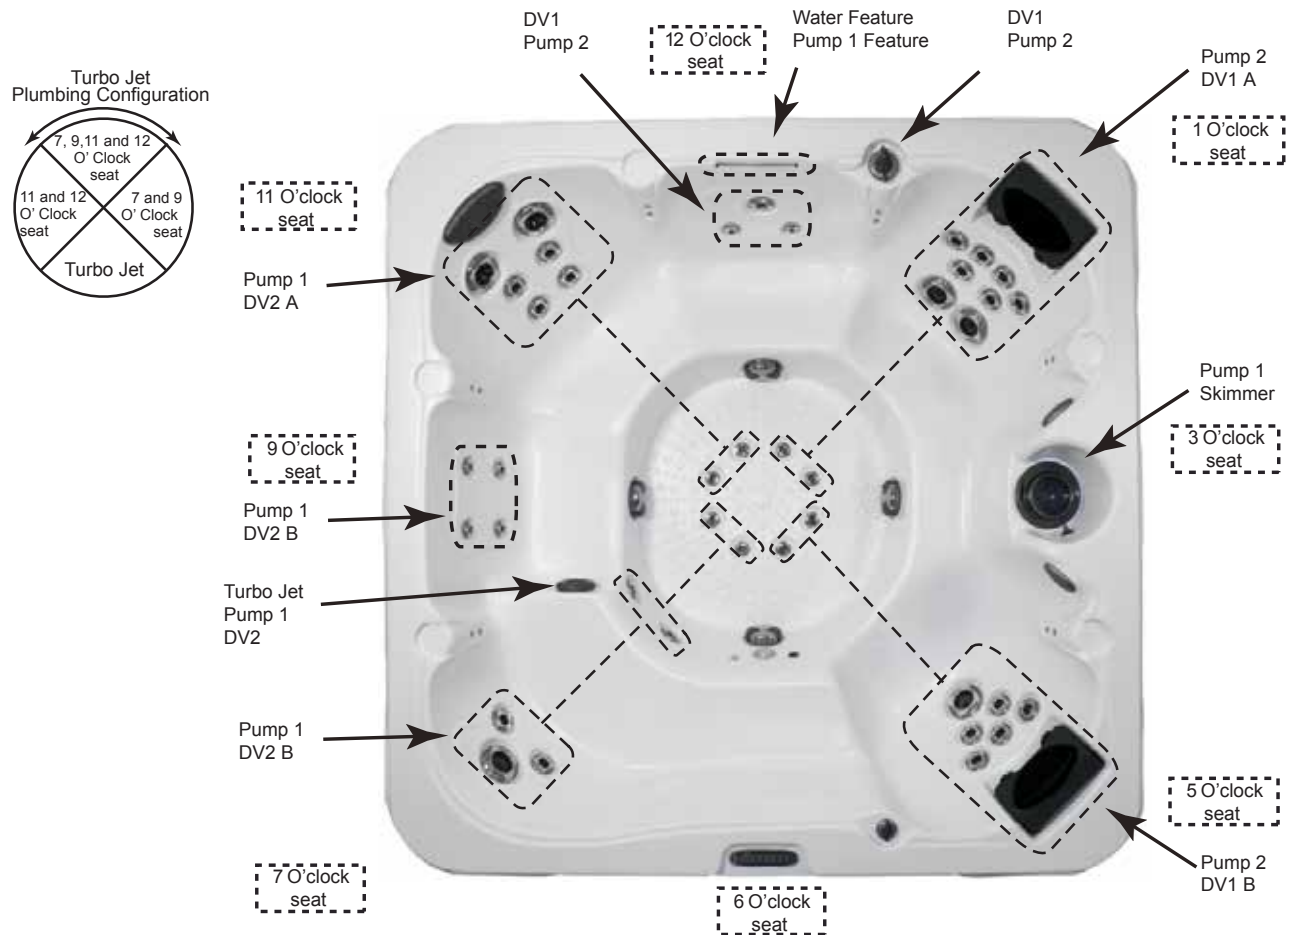

1. All drains and skimmer tied in common loop

Legend:

- DV1 = Diverter Valve 1
- DV1 A = Diverter Valve 1 (A position clockwise)
- DV1 B = Diverter Valve 1 (B position counter clockwise)
- DV1 C = Diverter Valve 1 (C neutral position)

Spa Operation Subject to Change without Notice

Seat Depths

- 1 = 16.00" (40.64 cm)
- 2 = 24.00" (60.96 cm)
- 3 = 27.00" (68.58 cm)
- 4 = 25.00" (63.50 cm)
- 5 = 28.00" (71.12 cm)
- 6 = 26.00" (66.04 cm)

- 7 = 16.00" (40.64 cm)
- 8 = 30.00" (76.20 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance $\pm 0.5"$ (1.27 cm).**



Dimensions/Specifications are Subject to Change Without Notice

Meridian

Jet Designation

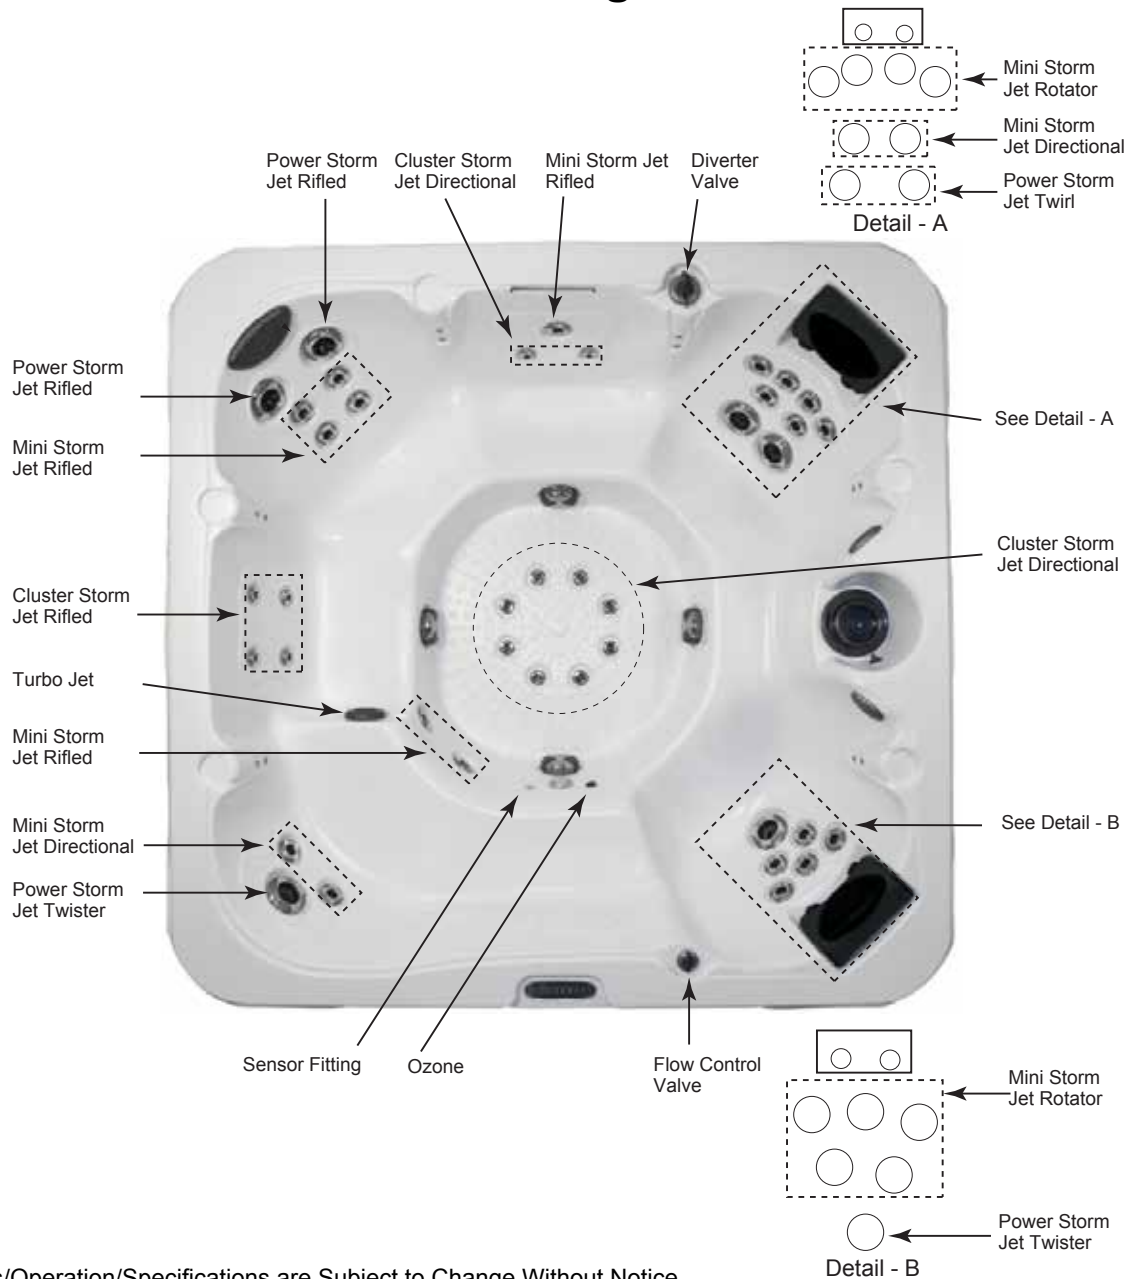


Dimensions/Operation/Specifications are Subject to Change Without Notice


45 Total Jets (textured)




Meridian

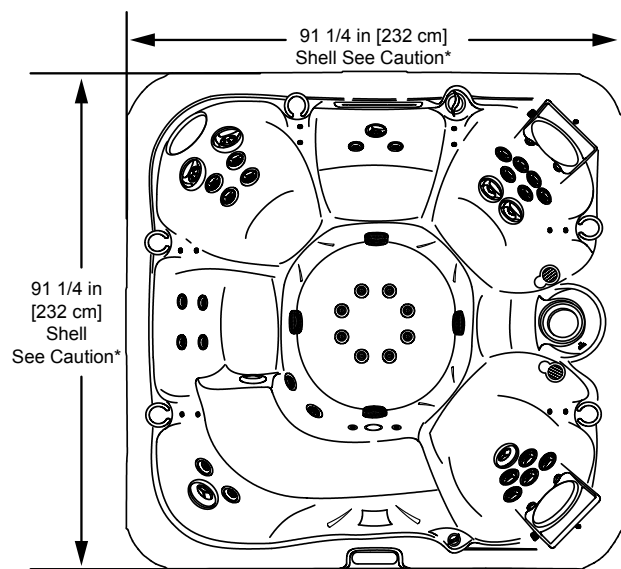

Front view of Spa

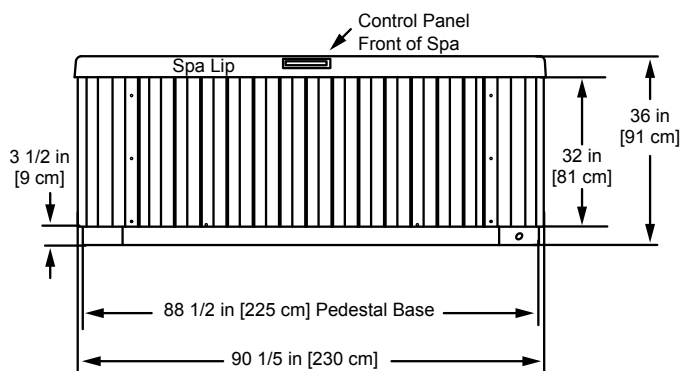

R9 in
[R23 cm]
Spa Shell

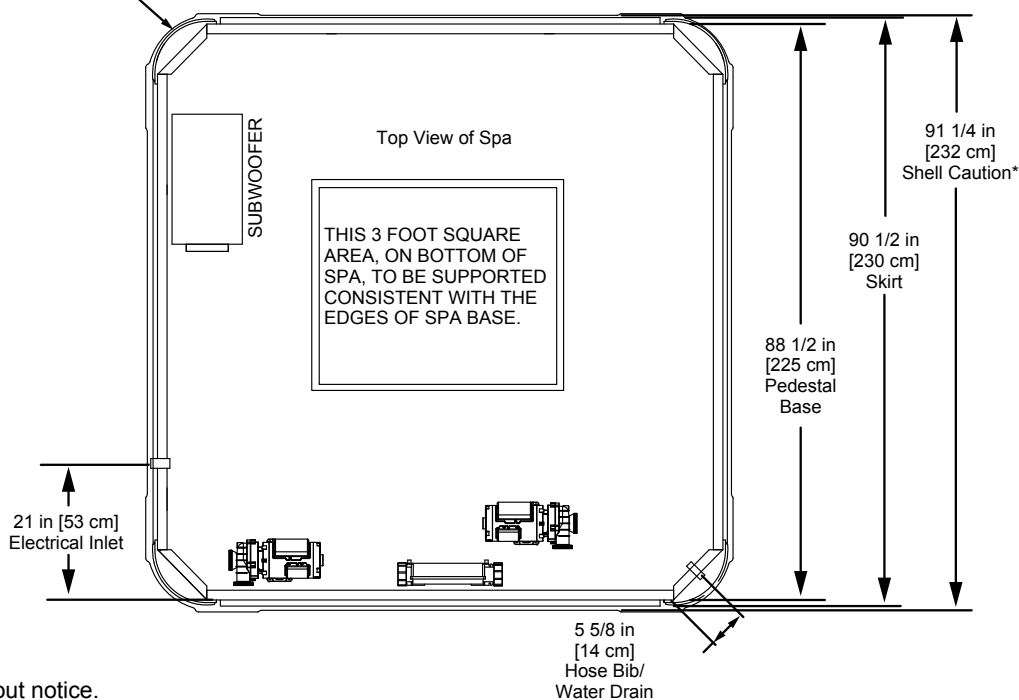

Note:

1. Subject to change without notice.
2. Engineering specs may differ slightly from brochure.
3. For E-Z lifter installation allow 18" (45.7cm) clearance on the backside of the spa.



*Caution:

Due to manufacturing tolerances there could be some minor differences between the actual spa and the drawing above. **If site planning is critical to such tolerances, be sure to measure your actual spa.**

Dimensions/Specifications are Subject to Change Without Notice (Tolerance $\pm 0.5"$ [1.27 cm]).