




QUAD CONFIGURATION FOR WELL WATER, CATCHMENT, OR CISTERN PARALLEL SYSTEMS IN SERIES RATED TO 90GPM: Two Views

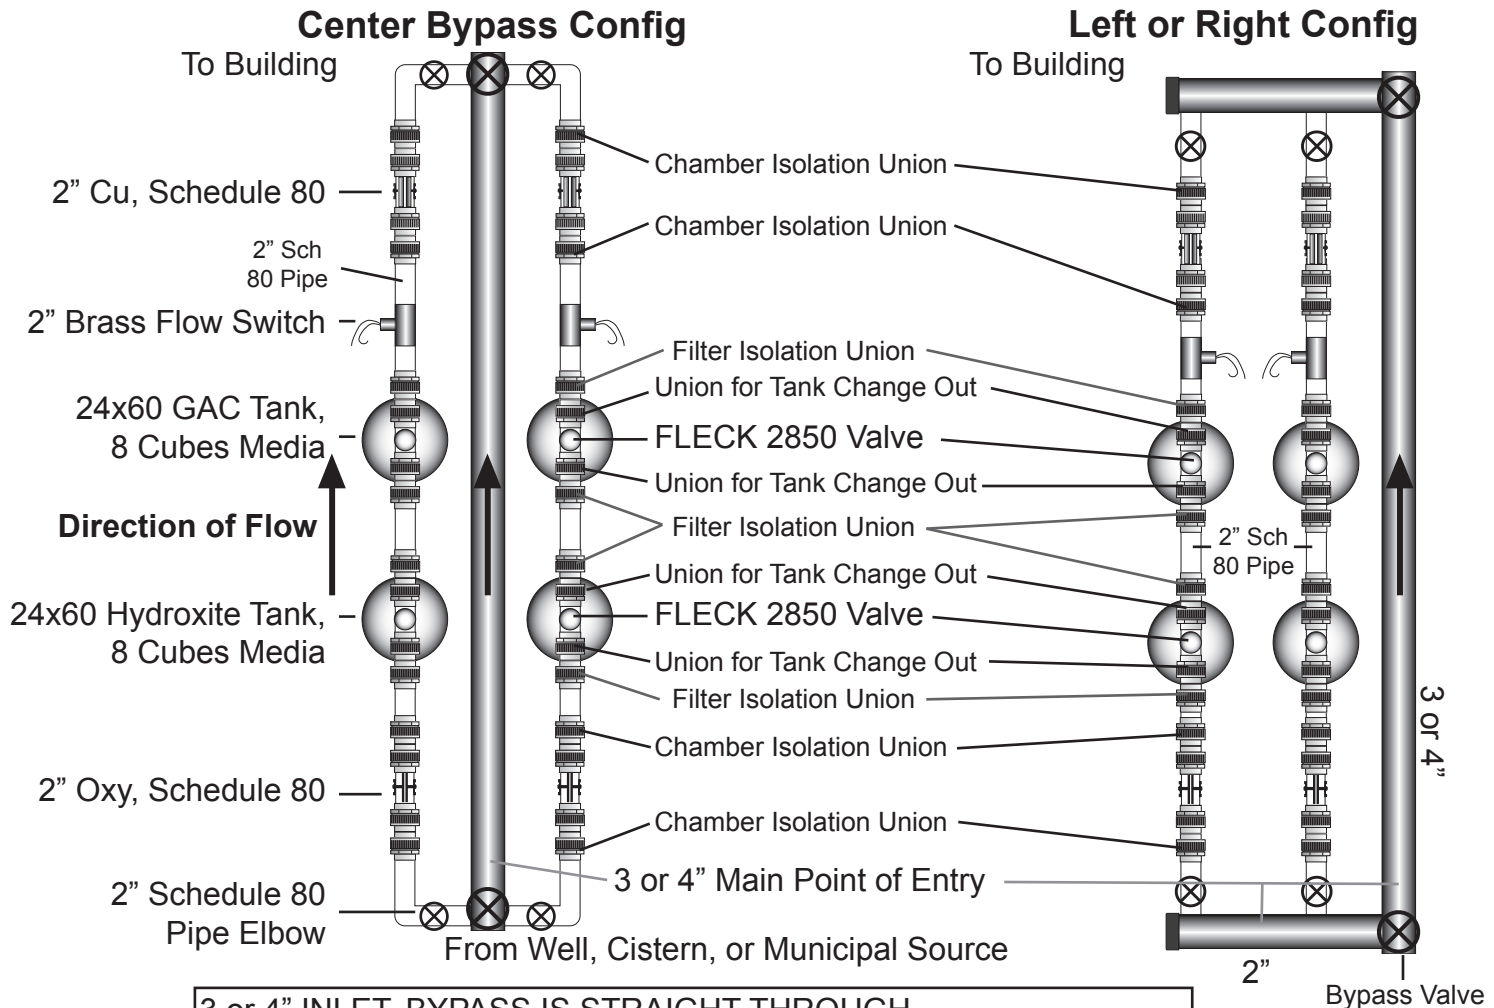

3 or 4" INLET, BYPASS IS STRAIGHT THROUGH
Two 2" LINES IN PARALLEL
Two 24x60 GAC AND HYDROXITE TANKS, 1 SET IN EACH SERIES
Two FLECK 2850 VALVES
GATE VALVES ISOLATE Cu/Oxy CHAMBERS
TWO YEAR MEDIA CHANGE OUT, VALVE REBUILD KIT
TWO YEAR COPPER CHANGE OUT
MONTHLY Cu/Oxy CHAMBER CLEAN
DAILY COPPER TEST .1ppm TO .25ppm
VALVE TIMERS CONFIRMED
ALL TANKS BACKWASH AT DIFFERENT TIMES
GAC FLOW CONTROL 35 DFLC
HYDROXITE FLOW CONTROL 60 DFLC
110v / 60Hz ECOsmarte CONTROLLERS
FLECK 2850 VALVES, REBUILD KIT 2nd YEAR

LOGISTICS:

SHIPS 5 PALLETS; 1250lbs ON EACH PALLET