
STERNA

The STERNA: The STERNA is a one of it's kind lighting solution that has been especially designed for cage systems. Thanks to it's coated surfaces, the STERNA is able to realise higher animal comfort. STERNA: a solid long term investment.





Dimensions

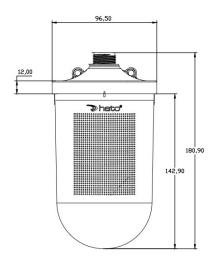

Specifications

48VDC Operating voltage: HATO 48VDC power supply Dimmer type: 0 - 100% Dim range: Light source: LED 9.4W Power consumption: Light output: 820 lumen Efficacy: 87.2lm/W 2900K Light colour: CRI: >80 Flicker-free: yes Expected average lifetime*: 50,000h -10° C (14°F) < Ta < $+40^{\circ}$ C (104°F) Operating temp.: Nett weight: 310 gr / 0.7 lbs Impact resistant PMMA Cover: Base: **ABS** 3 Years Warranty: Application: H-cage housing

Connection







T-connector (+ integrated cable)

Dir-Connector


Junction Box

Standard cable length options: 4, 150 or 250 cm's Other lengths upon request.




STERNA

Light Distributions




Spectrum

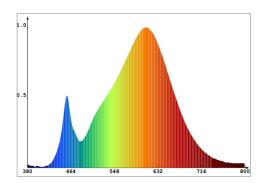

Accesories



Installation example

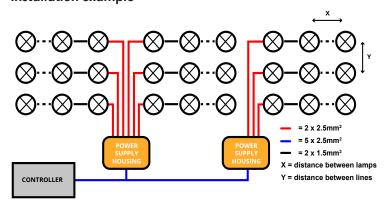


STERNA

Cable Ø	Distance (x) between lights	Lights in a row	4mm2 cable (11 AWG) Max length connection cable	2.5mm2 cable (13 AWG) Max length connection cable
2 x 1.5 mm2	2.4m / 7.8ft	27 (1)	43m / 141ft	26m / 85.3ft
2 x 1.5 mm2	3.6m / 11.8ft	22 (1)	52m / 170.6ft	33m / 108.3ft
2 x 1.5 mm2	4.8m / 15.7ft	20	58m / 190.3ft	36m / 118.1ft
2 x 2.5 mm2	2.4m / 7.8ft	32 (1)	35m / 114.8ft	22m / 72.2ft
2 x 2.5 mm2	3.6m / 11.8ft	28 (1)	41m / 134.5ft	25m / 82ft
2 x 2.5 mm2	4.8m / 15.7ft	25 (1)	46m / 150.9ft	29m / 95.1ft

⁽¹⁾ Warning: check number of STERNA in line to guarantee correct usage of fuses:

^{» 195} mA per lamp, standard 4A fuse (5x20mm/5x25/5x30mm) » In case of 21 pcs or more per line, 6A fuse 5x20mm/5x25/5x30mm min. 60VDC is needed



Specifications are subject to change without prior notice

Markings













^{**} Protection test against penetration of water IPX7 (protected against the effect of immersion between 15cm and 1m)



 $[\]mbox{\ensuremath{^{\star}}}$ Lifetime definition & measurement available upon request