



Perforating Roller Bogie®

Reach extended depths and higher deviations without the need for costly services

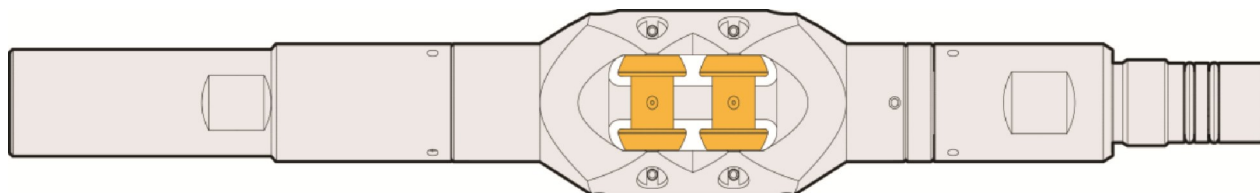

Features

- ▶ Self-orienting design.
- ▶ Low friction dual rollers.
- ▶ Streamlined profile.
- ▶ Robust and durable tool design.
- ▶ Low maintenance requirements.
- ▶ Available for all tubing sizes.

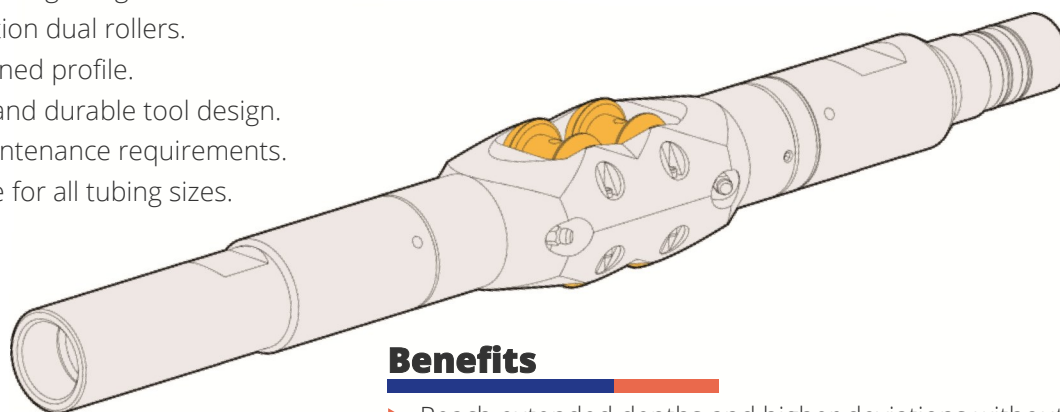

Benefits

- ▶ Reach extended depths and higher deviations without need for costly services such as coiled tubing or wireline tractors.
- ▶ Deploy longer perforating guns in deviated wells.
- ▶ Protect high value equipment from frictional wear.
- ▶ Improve cable management by reducing erratic loading.

Impact Selector's Perforating Roller Bogie®

tool is designed to work in perforating operations in conjunction with monoconductor and Guide Roller Bogies to create a complete roller system and are used in most electric-line ballistic operations.

Roller Bogie tools reduce frictional resistance and enable access to high deviations. With a proven track record of success at inclinations up to 87° and at depths in excess of 25,000 feet (7,620m), the Roller Bogie tool is extremely robust, reliable and widely used in over 50 countries across six continents.

Perforating Roller Bogie tools are installed between gun sections with conventional detonating cord feed throughs to ensure reliable ballistic transfer. The complete string is lifted on to highly efficient rollers,

eliminating contact friction and allowing easier and deeper wellbore access.

The roller body rotates freely around the mandrel which is connected to the host tool string. The unique body shape ensures the rollers are at all times oriented to the low side of the tubing. A field-replaceable ballistic mandrel protects the tool from the gun detonation, reducing cost and enabling fast redress between runs.

Perforating Roller Bogie tools are available in a wide range of sizes to pass through all wellbore restrictions and can be ordered with a choice of connection types to suit individual gun system requirements, including profiled bullnose guides to run at the bottom of wireline tool strings.



IMPACT SELECTOR®
Intelligent Conveyance® Technologies



1-800-238-9239



impact@impactselector.com




www.impactselector.com

ISO 9001-2015 / ISO 45001-2018

Heath, TX-USA and Aberdeen, Scotland-UK

©Impact Selector – All rights reserved. November 2022

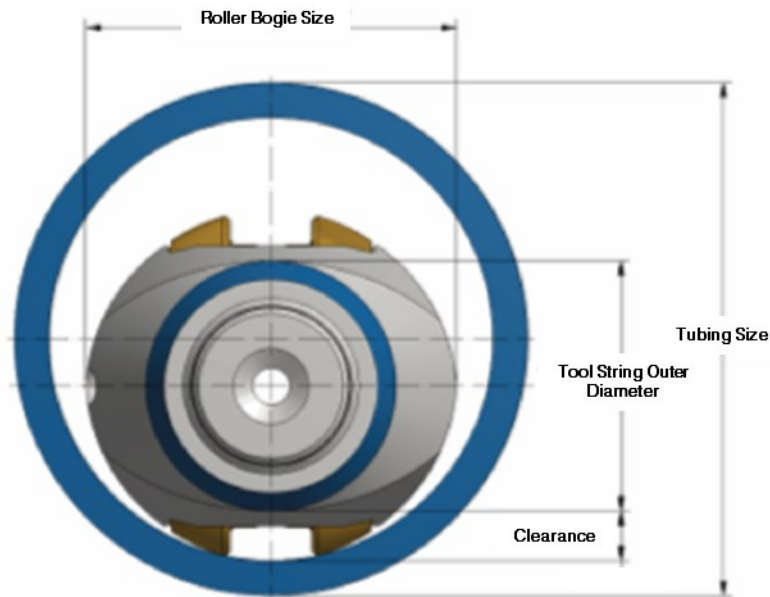

Specifications

Roller Bogie Size (in / mm)	2.500	2.600	3.350	3.600	3.850	4.100	5.500	5.800
	63.50	66.04	85.09	91.44	97.79	104.1	139.7	147.3
Weight (lbs / kg)	11	11	31	33	50	51	103	89
	4.99	4.99	14.06	14.97	22.68	23.13	46.72	40.37
Length (in / mm)	16	16	22	23	23	20	28	28
	406.4	406.4	558.8	584.2	584.2	508.0	711.2	711.2
Tubing Nominal Size (in / mm)	3.500	3.500	4.500	4.500	4.500	5.000	7.000	7.000
	88.90	88.90	114.3	114.3	114.3	127.0	177.8	177.8
Max Tool OD Conveyed (in / mm)	2.125	2.250	3.000	3.125	3.500	3.625	5.000	5.000
	53.98	57.15	76.20	79.38	88.90	92.08	127.0	127.0
Service Type	Standard, Sour, or Severe Sour Service available							
Connection Type	Connections available to suit customer specifications							

