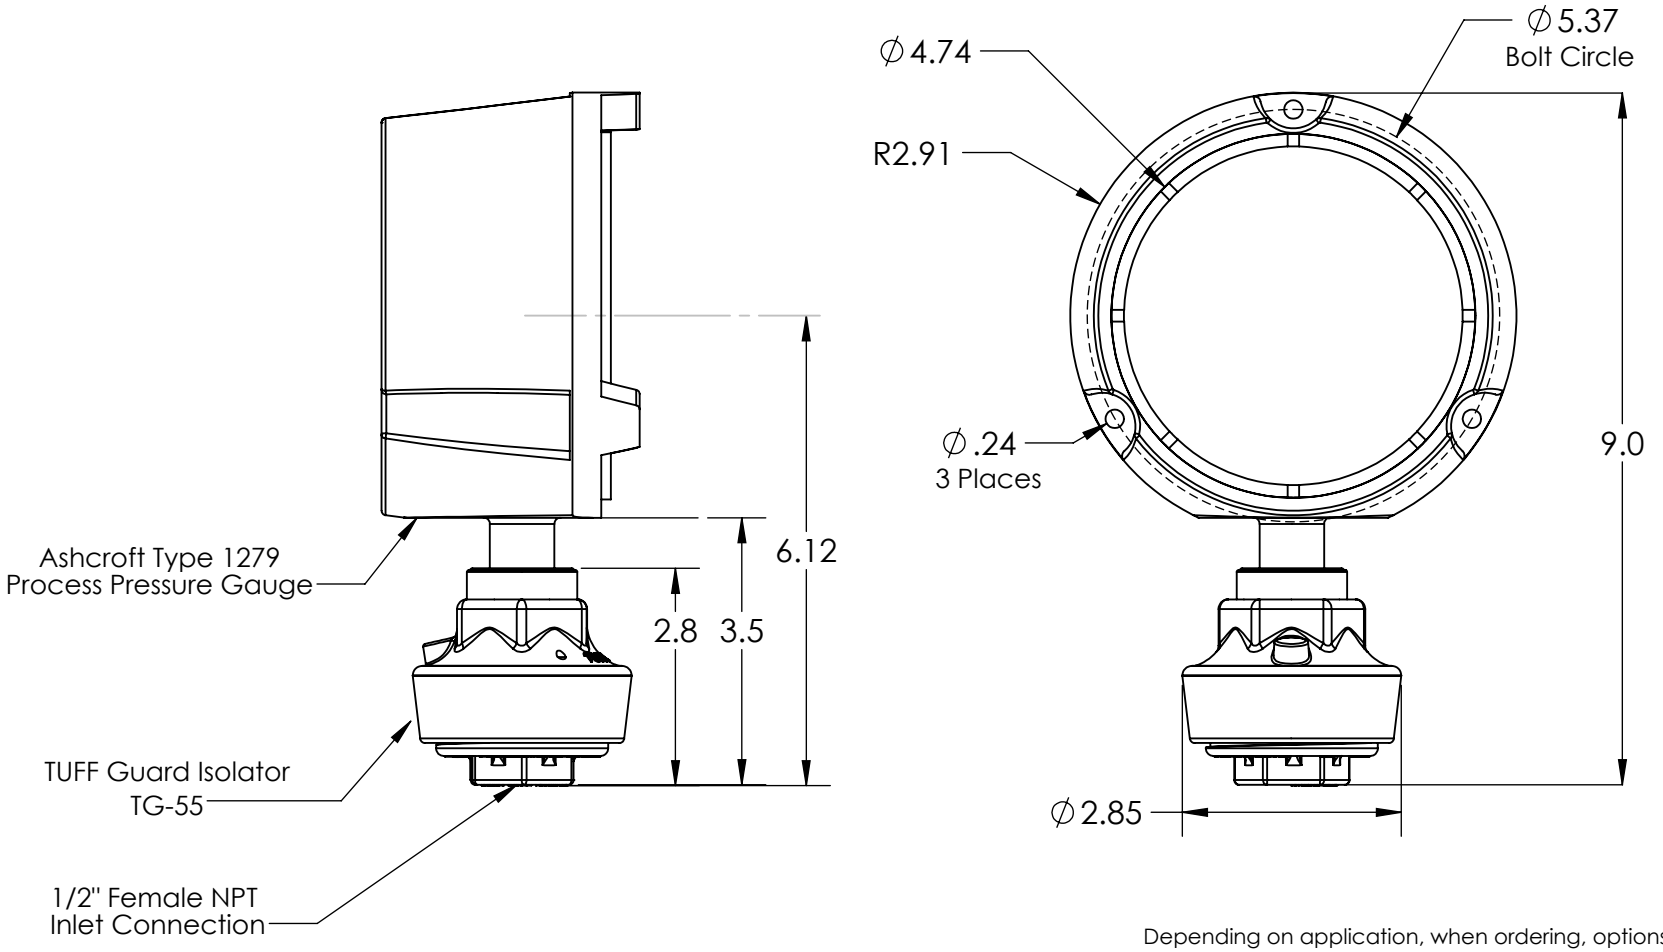

Depending on application, when ordering, options will need to be specified.

1. Gauge pressure range
2. Gauge isolator housing material: PVC, CPVC, PPR, PVDF
3. Diaphragm material: Modified PTFE, FKM, EPDM, Composite (PTFE / FKM)
4. Internal fill fluid: Aqueous Glycerin, Halocarbon, Silicone, Mineral Oil

Contact manufacturer for part numbers inclusive of options selected

Designer			TITLE: TUFF Guard Process Gauge Assembly
Review			
Engineer			
			DWG. NO. TG-55-PG / REV

MARQUEST SCIENTIFIC Fluid Handling Products

2950 Airway Avenue, Costa Mesa, CA 92626

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

SCALE: N/A | Format: SD | SHEET 1 OF 1

5 4 3 2 1