



- Extends the life of roofing membranes.
- Best-In-Industry Lifetime Warranty!
- Provides thermal and mechanical protection to roofing membrane.
- Unmatched durability with years of maintenance-free performance.



The toughest tile. Rain or shine.

You take pride in your property. Keep it looking its best with duraSTRONG® exterior rubber paving tiles from sofSURFACES. For over three decades, we have set the standard for safety, durability and value. Slip-resistant and able to withstand the toughest weather conditions, duraSTRONG exterior tiles are perfect for both commercial and residential applications, offering a long-lasting and affordable solution for outdoor living areas.



sofSURFACES.com 1 800.263.2363


©2021 sofSURFACES

STANDARD PLUS SERIES SOLID COLORS

Economically manufactured using recycled materials exclusively, duraSTRONG Plus Series offers the same durability and safety performance as our Premium Series at a more economical price.



PLUS SERIES

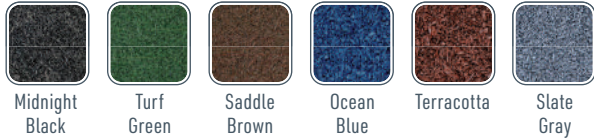

PREMIUM SERIES CUSTOMER FAVORITE COLOR BLENDS

For those desiring more of a creative flare, our duraSTRONG Premium Series offers more opportunity for artistic expression through an assortment of aesthetically pleasing premium color blends. Made from 100% recycled SBR rubber backing and topped with a blended wear layer of SBR recycled rubber and EPDM virgin rubber, our Premium Line affords you the best solution for any rooftop application. Choose from nine customer favorite blends!



PREMIUM 95 SERIES - (5% Black)



Additional colors and custom blends are available.

Please contact a member of our sales team for more information. Additional charges may apply.

1 800.263.2363 or info@sofsurfaces.com.



turning empty spaces into people places...

duraSTRONG® architectural paving products are the perfect solution to any rooftop project. In addition to extending the life of your roofing membrane, duraSTRONG's hollow-core pedestal design reduces noise caused from heavy foot traffic, driving rain, hail or even tool drops. Engineered from 90% recycled rubber, slip-resistant and maintenance-free, duraSTRONG Rubber Paving Tiles create a rooftop environment that property managers and tenants will thank you for.

Choose from a wide range of attractive colors and finishes to suit your design requirements and keep your properties looking their best with duraSTRONG.

PHYSICAL DIMENSIONS

Series	Installed Dimension	Thickness	Weight (lb) Ea.	sofRAMP Length/Width
Plus	24" x 24"	2.00"	24.46	47.75" / 7.0"
Premium	24.125" x 24.125"	2.00"	25.05	47.75" / 7.0"

PLEASE NOTE: duraSTRONG Plus Series tiles and Premium Series tiles are manufactured to be slightly larger than the installed dimension. This is to ensure that each tile can be compressed by 0.25" during the course of installation. Please follow the recommended installation guidelines in order to ensure the desired level of compression is achieved.

PHYSICAL PROPERTIES

Test Description	ASTM Ref.	Plus Series	Premium Series	Test Lab
Freeze Thaw Cycling	C67	N/A	PASS: 0.27% Weight Loss	Intertek
Rubber Deterioration/Air Oven	D573	N/A	0.48% Length Change	Intertek
Abrasive Wear Index	C501	205	167 (Average)	Intertek
Volume Density	D3676	817 kg/m³	904.77 kg/m³	DTL/INTERTEK
Slip Resistance	E303	Dry 51.25/Wet 44	Dry 53/Wet 32	QAI Laboratories
Slip Resistance	D2047	0.533	0.601	QAI Laboratories
Tensile Strength (Mpa)	D412	0.661	2.28	SGS/Intertek
Elongation at Break	D412	68.5%	119%	SGS/Intertek
Tear Strength (kNm)	D624	2.2	16.3	SGS/Intertek
Peak Tear Load (N)	D624	51	46.8	DTL
Surface Flammability	D2859	Pass	Pass	DTL
Critical Radiant Flux	E648	N/A	0.26 Avg. W/cm² (Class II)	INTERTEK

PLEASE NOTE: An architect or engineer should be engaged prior to the design process in order to determine suitability of the product for a particular application. Every project is unique; therefore, it is important to consider the product details and installation recommendations during the design phase of your project.