



LED UFO High Bay



Model: SZ-HB150W-AT3B-5000K (PC)

Advantage:

- UL&DLC certificate
- 2835 Chip, high CRI
- Input voltage 120-277VAC
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, long lifespan
- Light is soft and uniform, safe to eyes
- Instant start, NO flickering, NO humming
- Green and eco-friendly without mercury.

Application:

Warehouse, factory and workshops;
Highway toll station and gas station;
Exhibition hall;
Gymnasium and supermarkets, etc.

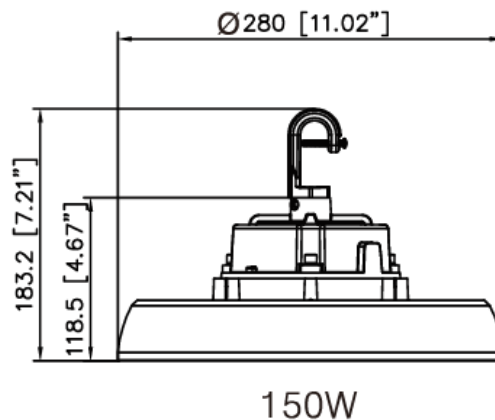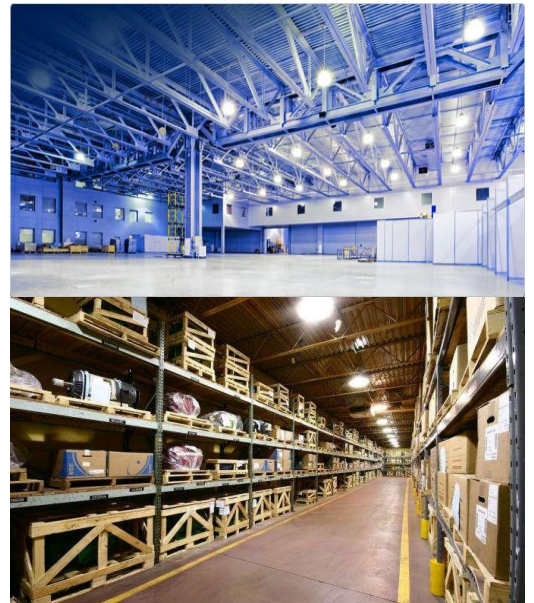

Product Specifications

Product Name	LED UFO High Bay
Light Type	SZ-HB150W-AT3B-5000K (PC)
Dimension	Φ280*183 mm

Technical Characteristic

Color temperature	5000K
CRI	>80
Lumen	21000LM
Lumen Efficacy	140LM/W
Input Power	150W
Viewing Angle	80 Degree
Input Voltage	120-277V 50/60Hz
Driver model	China Brand driver, (0-10Vdc Dimmer)
PF	>0.9
Waterproof Rating	IP65

Materials



LED Type	2835
LED QTY	400PCS
Housing	Aluminum(ADC12)
Housing color	Black
Cover	PC
Operating Temperature	-40℃ TO 45℃
Operating Humidity	10%-90% RH
Storage Temperature	-40℃ TO 80℃

Others

Storage Humidity	10%-95%
Application	Outdoor
Safety Certification	UL&DLC
Warranty Time	5 Years

Light Distribution Testing Parameters

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	HB150W	Imax (cd)	12495	S/MH(C0/180)	1.13
NOMINAL POWER (W)	150	LOR(%)	100.0	S/MH(C90/270)	1.16
RATED VOLTAGE (V)	120	TOTAL FLUX(lm)	21300	η UP,DN(C0-180)	1.2,45.9
NOMINAL FLUX(lm)	21299.9	CIE CLASS	DIRECT	η UP,DN(C180-360)	1.4,51.5
LAMPS INSIDE	1	η up (%)	2.6	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	120	η down (%)	97.4	CIBSE SHR MAX	1.15

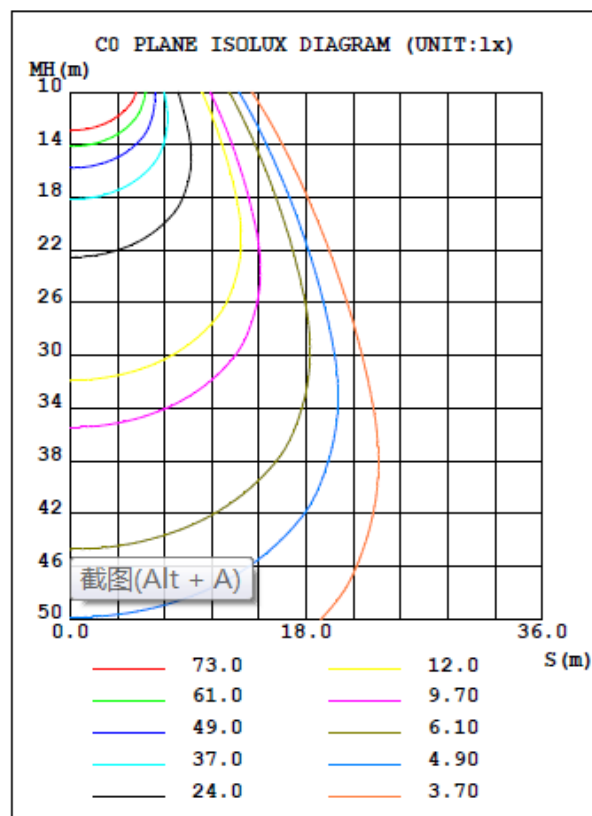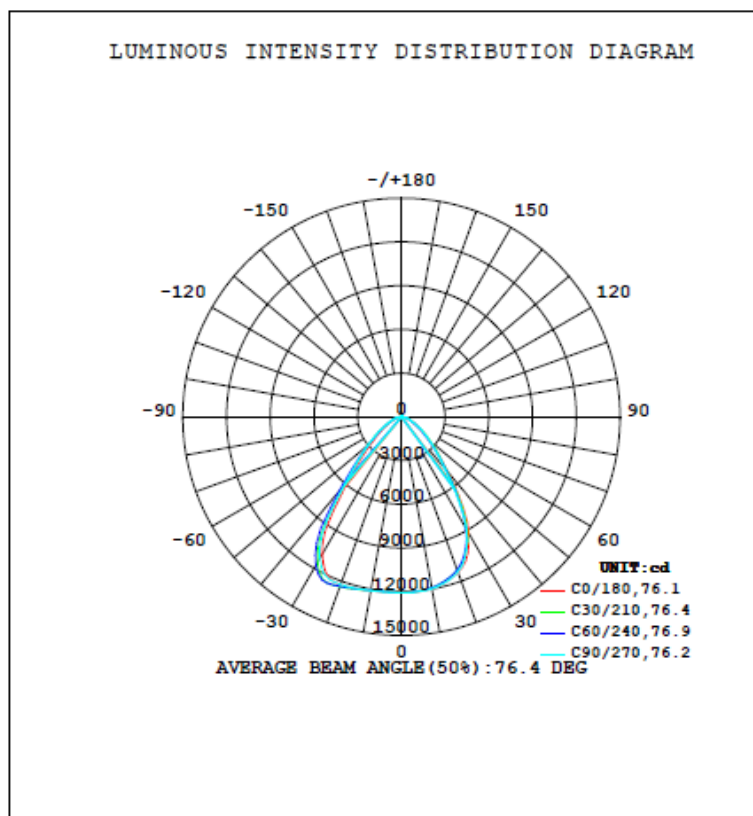

Package

Model	Net Weight	Size	Qty/Carton	Weight/Carton
SZ-HB150W-AT3B-5000K (PC)	2.2KG	330*330*179MM	1	2.6KG