



LED UFO High Bay



Model: SZ-HB200W-AT3B-5000K (PC)

Advantage:

- UL&DLC certificate
- 2835 Chip, high CRI
- Input voltage 120-277VAC
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, long lifespan
- Light is soft and uniform, safe to eyes
- Instant start, NO flickering, NO humming
- Green and eco-friendly without mercury.

Application:

Warehouse, factory and workshops;
Highway toll station and gas station;
Exhibition hall;
Gymnasium and supermarkets, etc.

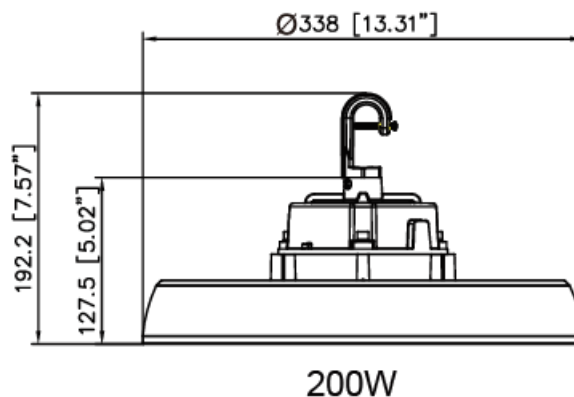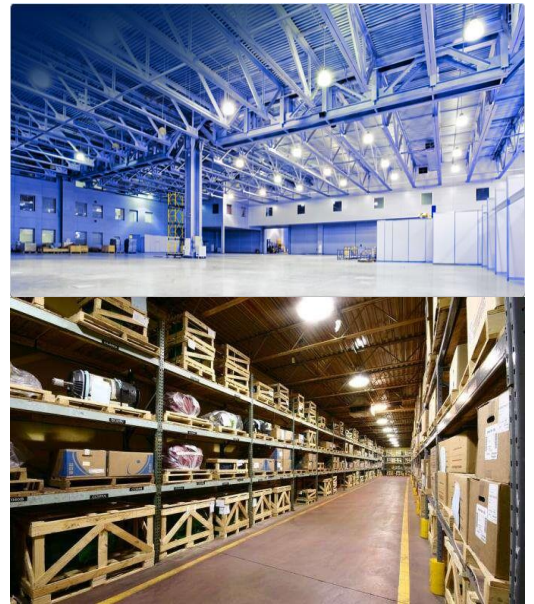

Product Specifications

Product Name	LED UFO High Bay
Light Type	SZ-HB200W-AT3B-5000K (PC)
Dimension	Φ338*192 mm

Technical Characteristic

Color temperature	5000K
CRI	>80
Lumen	28000LM
Lumen Efficacy	140LM/W
Input Power	200W
Viewing Angle	90 Degree
Input Voltage	120-277V 50/60Hz
Driver model	China Brand driver, (0-10Vdc Dimmer)
PF	>0.9
Waterproof Rating	IP65

Materials



LED Type	2835
LED QTY	560PCS
Housing	Aluminum(ADC12)
Housing color	Black
Cover	PC
Operating Temperature	-40℃ TO 45℃
Operating Humidity	10%-90% RH
Storage Temperature	-40℃ TO 80℃

Others

Storage Humidity	10%-95%
Application	Outdoor
Safety Certification	UL&DLC
Warranty Time	5 Years

Light Distribution Testing Parameters

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	HB200W	Imax (cd)	15455	S/MH (C0/180)	1.12
NOMINAL POWER (W)	200	LOR (%)	100.0	S/MH (C90/270)	1.13
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	27915	η UP, DN (C0-180)	1.2, 48.6
NOMINAL FLUX (lm)	27915	CIE CLASS	DIRECT	η UP, DN (C180-360)	1.3, 48.8
LAMPS INSIDE	1	η up (%)	2.6	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	120	η down (%)	97.4	CIBSE SHR MAX	1.15

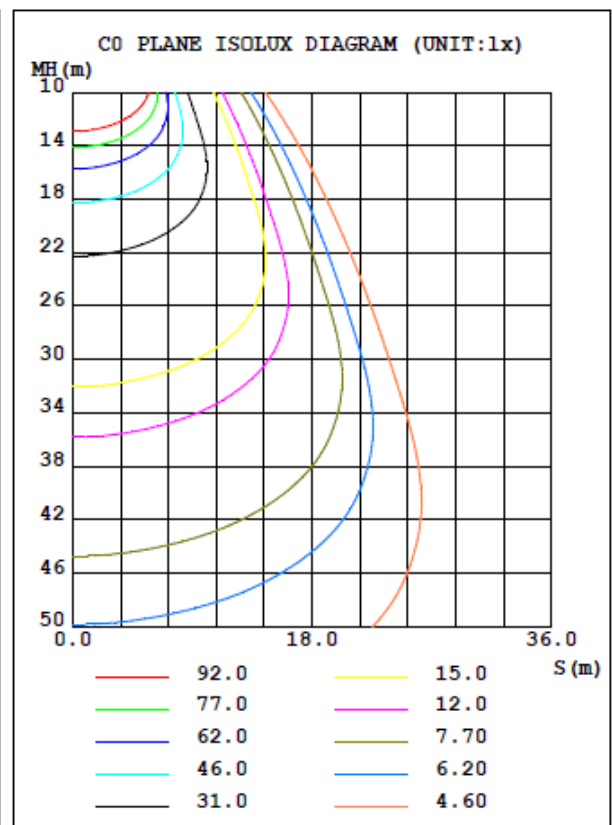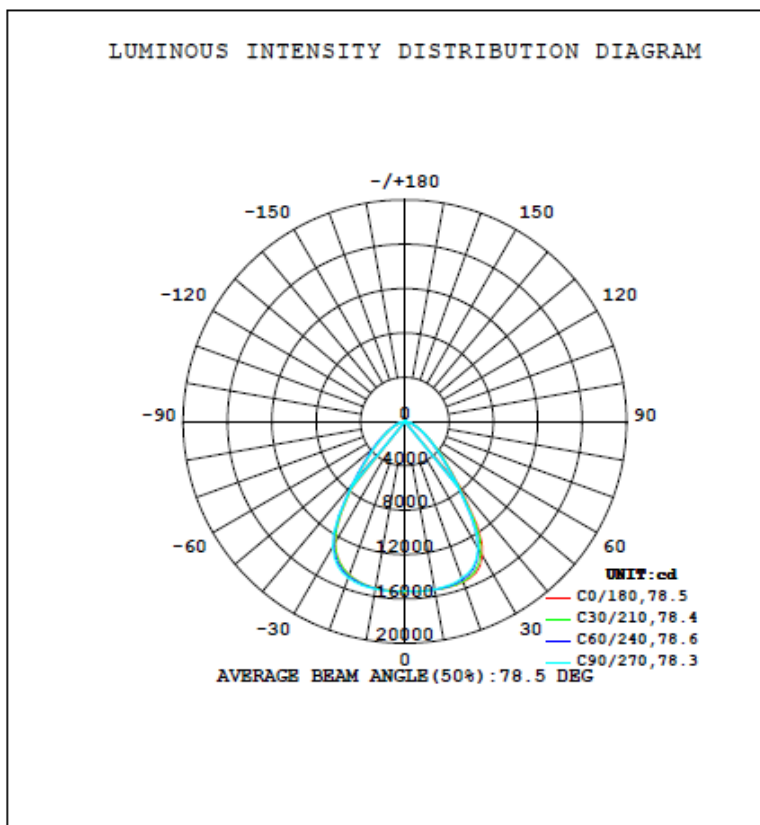

Package

Model	Net Weight	Size	Qty/Carton	Weight/Carton
SZ-HB200W-AT3B-5000K (PC)	3.1 KG	390*390*188MM	1	3.65KG