



## LED Rotatable Wall Pack

Model : SZ-RWP80W-AL6-5700K


### Advantage:

- UL certificate;
- IP65 Internal driver, with Photocell;
- Input voltage 120-277VAC;
- No UV or IR in the beam;
- Easy to install and operate;
- Energy saving, long lifespan;
- Light is soft and uniform, safe to eyes;
- Instant start, NO humming;
- Green and eco-friendly without mercury.



### Application:

Entrance lighting, courtyard lighting;  
Industrial lighting, Outdoor landscape lighting;  
Building, The hotel;  
Wall lighting area and so on.

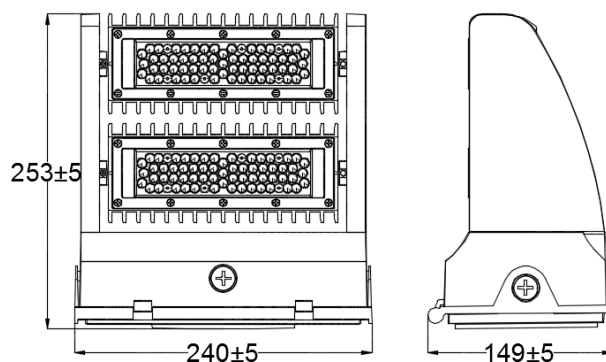

## Specifications

Product name	LED Rotatable Wall Pack
Part No	SZ-RWP80W-AL6-5700K
Dimension	240*149*253mm

## Technical Characteristic

Color temperature	5700K
CRI	>70
Lumen	11200LM
Lumen Efficacy	140LM/W
Input Power	80W
Viewing Angle	60 Degree
Input Voltage	120-277VAC, 50/60Hz
Driver model	China Brand Driver, 0-10V dimming standard
Photocell	Yes
PF	>0.9
Waterproof Rating	IP65

## Materials

LED Type	3030
LED QTY	98PCS
Housing	Aluminum(ADC12) +PC
Housing color	Brown

## Others

Operating Temperature	-40℃ TO 45℃
Operating Humidity	100%-90% RH
Storage Temperature	-40℃ TO 80℃
Storage Humidity	10%-95%
Application	Outdoor / Indoor
Safety Certification	UL
Warranty Time	5 Years

## Light Distribution Testing Parameters

## Luminaire Property

Luminaire Manufacturer:  
Luminaire Category:  
Lamp Catalog:  
Number of Lamps:  
Luminous Length (mm):  
Luminous Height (mm):  
Current: 0.659 A  
Power Factor: 0.994


Luminaire Description:  
Lamp Description:  
Lumens per Lamp:  
Luminous Width (mm):  
Voltage: 120.0 V  
Power: 78.73 W

## Photometric Results


IES Classification: Type I  
Total Rated Lamp Lumens: 10808.6 lm  
Efficiency: 100%  
Upward Ratio: 0%  
C0r0 Intensity: 9282.24 cd  
Pos of Max. Intensity: H202.5 V3

Longitudinal Classification: Very Short  
Measurement Flux: 10808.6 lm  
Downward Ratio: 100%  
Luminaire Efficacy Rating (LER): 137.34  
Max. Intensity: 9348.64 cd

Luminous Intensity Distribution Curve

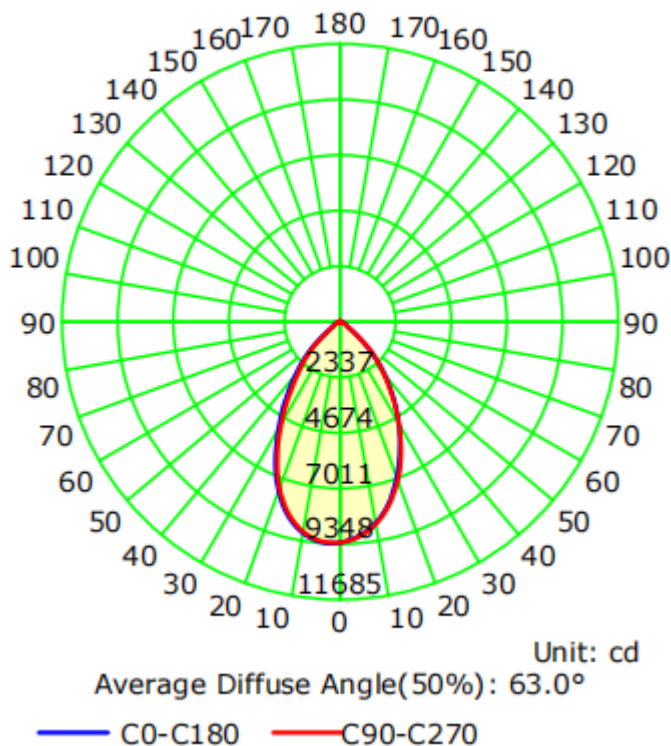


Illuminance at a Distance

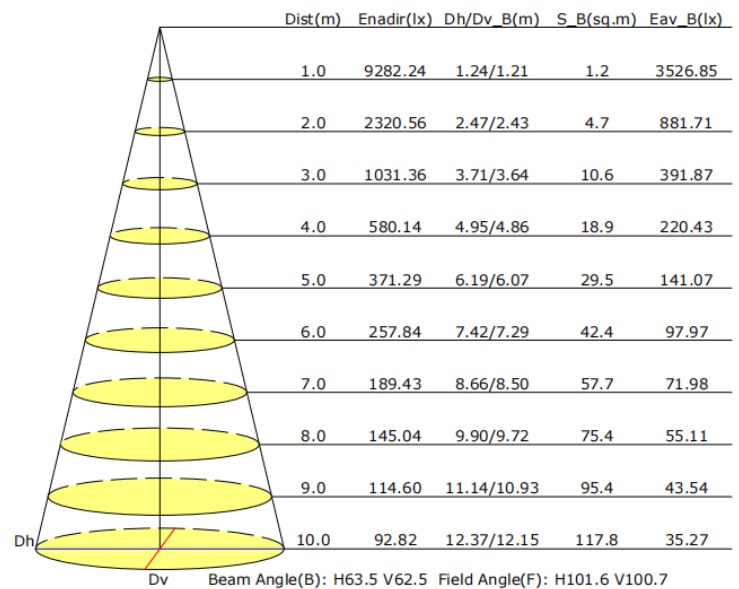

## Package

Lamps Net Weight: 3kg / pcs

Model	Size	Qty/ Carton	Weight/ Carton
SZ-RWP80W-AL6-5700K	415*310*320mm	2	7.2KG

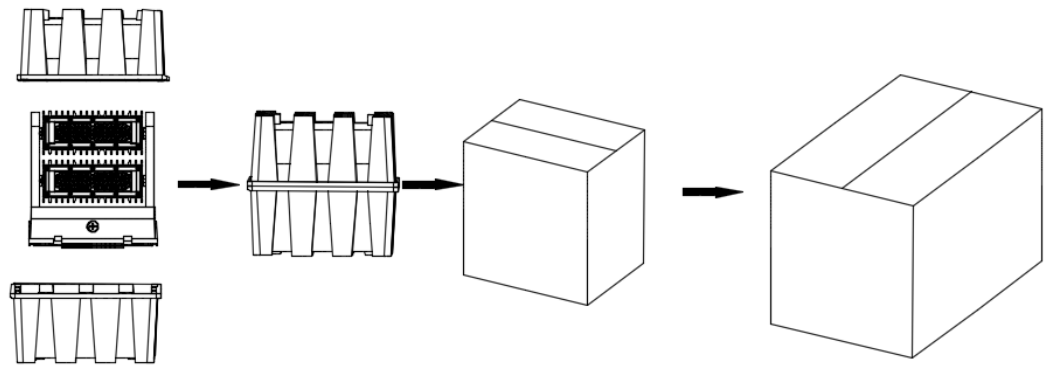

Notice For User

Please turn off power before install or change assembly parts.  
The input voltage and lamps should be matched, after connecting the power line,  
Please make sure the wiring section is insulated.  
No-professionals, must not install and disassemble the lamps.

Trouble Shootings

Troubles	Check points
Flickering of the light	Turn off the power and turn on again in 3 minutes. If same phenomena occur, then call agencies
Out of working	Please check the connection