

GAS FIREPLACES

Direct Vent / Zero Clearance



72 DVT30N with Hemlock Valley Door & Quebec City Grey Brick Set

CONTENTS



The story of Archgard and the inspiration of heating	3
Products	
70 DV/T00NI	4
72 DVT30N 3400 DVTR20N	6
Technical Information	8
Accessories	10



THE STORY OF ARCHGARD AND THE INSPIRATION OF HEATING

INSPIRATION

Fire has played a vital role throughout history, ensuring our survival. The fireplace has always held a special place in the hearts and homes in North America. It is the focal point of the home and provides the heat, light, and security we all need – especially during those cold winters and long nights with heavy snowfall and icy winds.



DRIVE

Passion has been the drive behind every fireplace Archgard has built since it was established over 30 years ago. Quality, modern technology, and design has been our recipe for success. Quality was our promise then, and quality is our promise today. Our fireplaces combine old traditions with modern functionality. We create products that give you the same feeling you get while sitting in front of a traditional wood burning fireplace yet satisfies even the most stringent demands for clean combustion. This all leads to the Archgard experience: enjoy your unparalleled flame with a clear conscience.

AND SO MUCH MORE....

The fireplace is no longer simply a source for heat but rather a central part of our homes. Our fireplaces are designed with clean lines and a focus on providing a perfect flame. We offer a wide range of products and accessories to meet any personal tastes. The result of our endeavors are timeless classics that form a natural gathering point in modern homes.

72 DVT30N

Fireplace Dimensions :

38"(965mm) W x 38"(965mm) H x 16-1/4"(412mm) D*

SPECIFICATIONS

Input Rating			
Natural Gas	20,100-30,000 BTU/hr 5.9-8.8 kW/hr		
Propane	23,000-30,000 BTU/hr 6.7-8.8 kW/hr		
Efficiencies			
Steady State 68.49%			
P4 Fireplace Efficiency 65.94%			

FIREBRICK OPTIONS



72-BRPL-QCG / Brick Panel, Québec City Grey



72-BRPL-QCR /Brick Panel,
Québec City Red



72-BRPL-RG /Eternal Flame Reflective
Ceramic Glass

For more information, pictures, and videos visit www.archgard.com



Relax and let your Archgard fireplace warm your home on those cold nights when you need it the most. The German engineered silent direct drive heat distribution fans will provide the warmth you need faster and farther than natural convection.

^{*} See the manual for more information.

^{**} All units come standard with barrier screens which attach to the door with very little effort.





3400 DVTR20+

Fireplace Dimensions:

34-5/8"(863mm) W x 30"(762mm) H x 15-3/4"(381 mm) D*

SPECIFICATIONS

Input Rating		
Natural Gas	13,000-20,000 BTU/hr 3.8-5.8 kW/hr	
Propane	15,000-20,00 BTU/hr 4.4-5.8 kW/hr	
Efficiencies		
Steady State 61.94%		
P.4 fireplace Efficiency	54.54%	

FIREBRICK OPTIONS



3400-BRPL-QCG / Brick Panel, Québec City Grey



3400-BRPL-QCR / Brick Panel, Québec City Red



3400-BRPL-RG / Eternal Flame Reflective Ceramic Glass

For more information, pictures, and videos visit archgard.com $\,$

- * See the manual for more information.
- ${}^{**}\,\text{All fireplaces come standard with barrier screens which attach to the door with very little effort.}$
- + Top or rear vent.



Quality, Design, and Dependability are at the core of every Archgard fireplace. The affordable 3400 DVTR20N is no exception. This 20,000 BTU heater rated direct vent gas fireplace will fit any budget. Customize your fireplace by adding optional variable speed heat distribution fans, Quebec City Grey or Quebec City Red brick panels, or or the robust Eternal Flame Reflective Ceramic Glass.

Household Refinement

Whether building a new home or improving your existing home, the 3400 DVTR20N will exceed your expectations and become the focal point of any room.



Fireplace name: 3400-DVTR20N Surround: 3400 FIFAB (Forged Iron Front, Arch, Black) Firebrick option: 3400-BRPL-QCG (Québec City Grey)



	72 DVT30N	3400 DVTR20N	
Natural Gas Input Rating	20,100-30,000 BTU/hr 5.9-8.8 kW/hr	13,000-20,000 BTU/hr 3.8-5.8 kW/hr	
Propane Input Ranting	23,000-30,000 BTU/hr 6.7-8.18 kW/hr	15,000-20,000 BTU/hr 4.4-5.8 kW/hr	
	Efficier	ncies	
Steady State	65.94%	61.94%	
P4 Fireplace Efficiency	65.94%	54.54%	
	'		
	Minimum Fireplace (Opening	
Framing dimensions	38" H x 38" W x 16-1/4" D	31" H x 34-3/4" W x 16" D	
Viewing Area	H 15.5" x W 29"	H 14.5"x W 26.75"	
Vent Size	4 x 7" flex o	r approved 6 5/8" rigid	
Vent Exit location on unit	Top exit Top or rear exit		
	Clearance to Co	ombustibles	
Mantle Clearance	45" from bottom of unit to bottom of 6" mantle	35" from bottom of unit to bottom of 6" mantle	
Standard Features			
Ceramic Glass	Included	Included	
Burner Type	Wall to wall steel pan with Elite Lifetime Warranty		
Firebox Construction	Welded/Rivet and Gasket silicone free		
Warranty options	Elite Limited Lifetime	Elite Limited Lifetime	
Fan Kit	Included	Optional	
Propane conversion kit	Optional	Optional	

LOUVERS & FILLIGREES OPTIONS



Louver Kit, Brushed Nickel



Louver Kit, Black



Louver Kit, Alternating Brushed Nickel and Black



Louver Kit, Alternating Gold tone and Black

FILLIGREES

Logo Design **B** N*G**






*Brushed Nickel / **24K Plated






TECHNICAL DIMENSIONS


TOP VIEW



SIDE VIEW



CORNER FRAMING

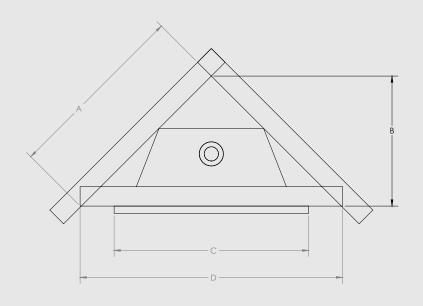

72 DVT30N (TOP VENT ONLY)

Α	В	С	D
38"	21-1/2"	16-1/4"	6-1/2"
965mm	545mm	412mm	164mm
Е	F	G	Н
31"	38"	29-3/4"	N/A

3400 DVTR20N (TOP & REAR VENT)

А	В	С	D
34-5/8"	23-1/2"	15-3/4"	6-3/4"
864mm	584mm	381mm	152mm
Е	F	G	Н
29"	30"	27-1/2"	21-1/2"
737mm	762mm	686mm	508 mm

72 DVT30N

А	В	С	D
39-1/8"	27-5/8"	38"	55-1/4"
994mm	686mm	965mm	1403mm

3400 DVTR20N

А	В	С	D
*39-1/2"	28"	34-3/4"	46.75"
991mm	711mm	864mm	1187mm

*This measurement allows for 6" sidewall clearance on sides of unit (required).





FRONTS & DOORS





	Forged Iron Front Square FIFSB / FIFSP	Forged Iron Front Arch FIFAB / FIFAP	Wrought Iron Front Arch 72-WIFASDB / WIFASDP
FOR MODEL 72	36"h x 42"w	36"h x 42"w x 32 7/8" t	
	ВР	Single door B	_
FOR MODEL 3400		~33 1/2"h x 40 1/2"w x 30 1,	
	B	B P	

N Nickel G Gold Gt Gold tone B Black P Pewter










	Door Arch DAHVBL / 72-DAHVBL	Forged Iron Front Square Bow 72-FIFSBOW2DB* / 72-FIFSBOW2DP*
FOR MODEL 72	~34 5/8"h x 39 1/8"w x 32" to shoulder	*35-1/2"h x 42"w
	Hemlock Valley B	*Bow, Double door B P
FOR MODEL 42	~35"h x 39-3/4" w x 32-1/4" to shoulder Hemlock Valley	

^{*} See the manual for more information.
** All units come standard with barrier screens which attach to the door with very little effort.



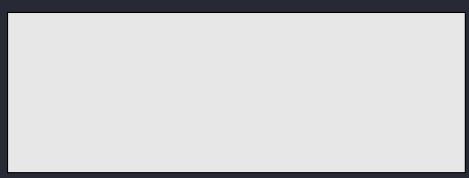



Part # 100-3030