

■ **Features**

- Input Voltage: DC 5V-12V/2A
- Output current Li-Ion 2\*1.5A(max.)
- Output current Ni-MH/NiCd 2\*1A(max.)
- Output Voltage DC 4.2V±1% / 1.48V±1%
- 1.5A for each Bay
- Fireproof PC+ABS material
- Black Case
- Dimensions 144x80x46.5mm
- Weight 285g
- LCD screen
- Supports seven charge current profiles that can be set manually
- Fully automatic charging and will automatically stop when fully charged




\*Product images are for illustrative purposes only and may vary from actual design.

■ **Applications**

- For Charging rechargeable batteries

**\*Requires external power supply adapter, not included. Please contact Autec Sales for recommended power supplies.**

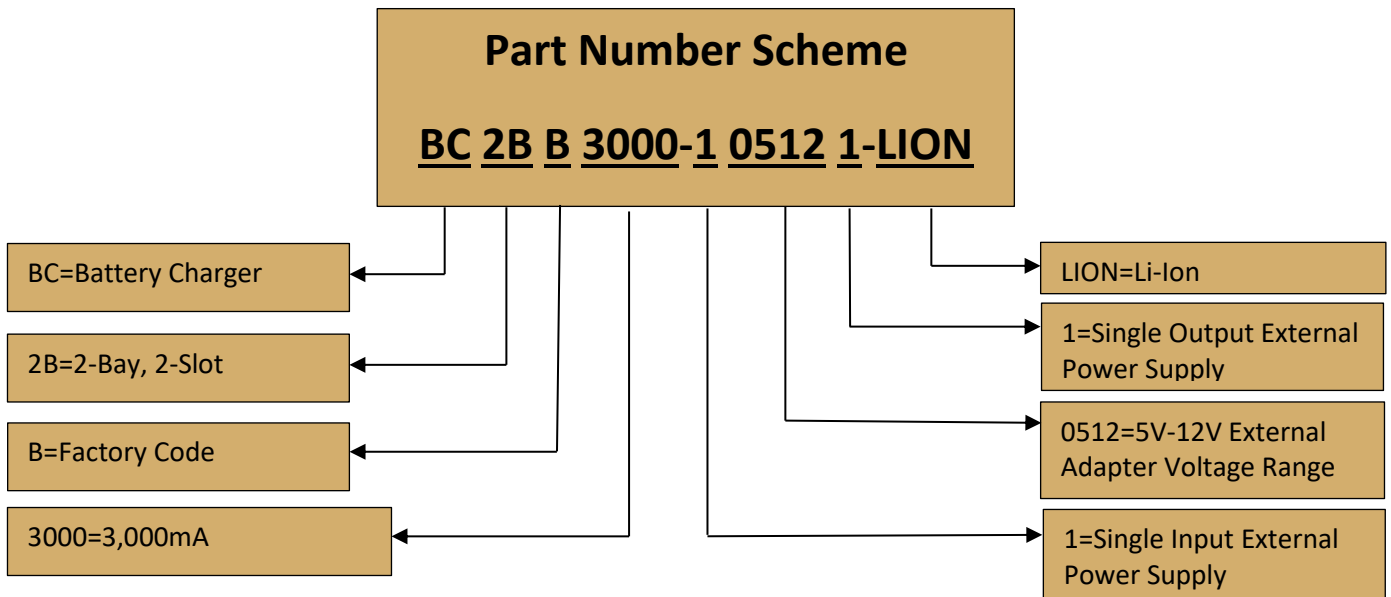

**\*Product images are for illustrative purposes only and may vary from actual design.**

**\*Specifications are subject to change without notice. Autec is not responsible for issues arising from errors or omissions.**