

■ **Features**

- Single output from 84W
- 100-240Vac Universal input
- Safety standard: IEC60950, IEC60601, IEC61558, IEC60335
- Certificates: UL, CE
- SCP, OCP, OVP, and Over load protection
- Efficiency Level VI
- MTBF: 50,000 hours
- Dimension: 111x53.5x33.5mm



*Product images are for illustrative purposes only and may vary from actual design.

■ **Application**

- Consumer electronics and office equipment
- Industrial equipment


Custom Designs Available!


■ **Model List**

Model	Output Voltage	Output Current	Power	Certificates
DT084S-120-X-XX	12V	7A	84W	UL, CE
DT084S-150-X-XX	15V	5.6A	84W	UL, CE
DT084S-180-X-XX	18V	4.66A	84W	UL, CE
DT084S-240-X-XX	24V	3.5A	84W	UL, CE

■ **Mechanical Diagram**

*Available A/C inlet with C6, C8, and C14

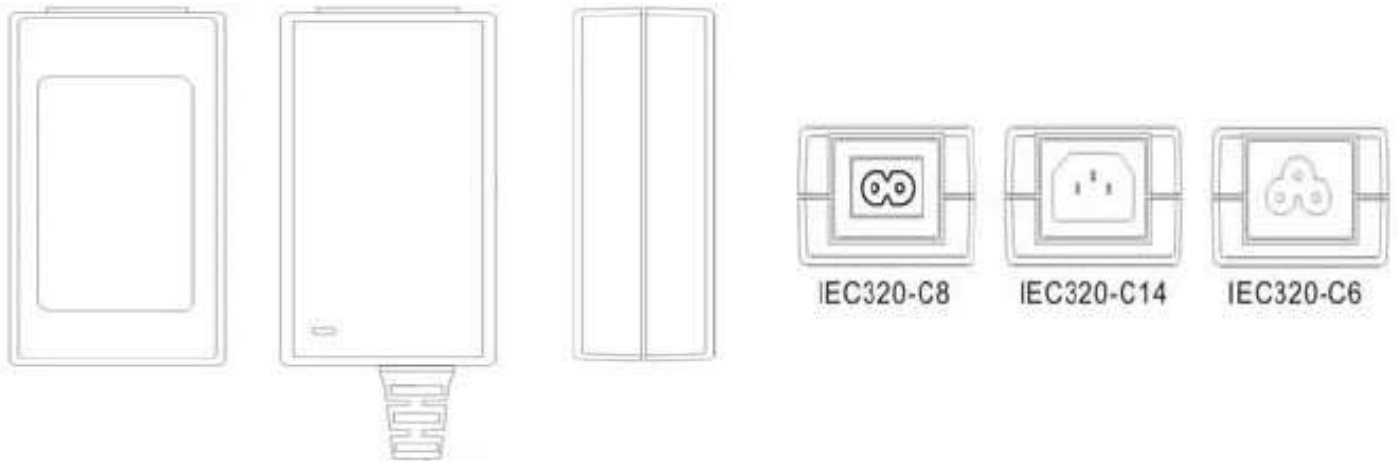

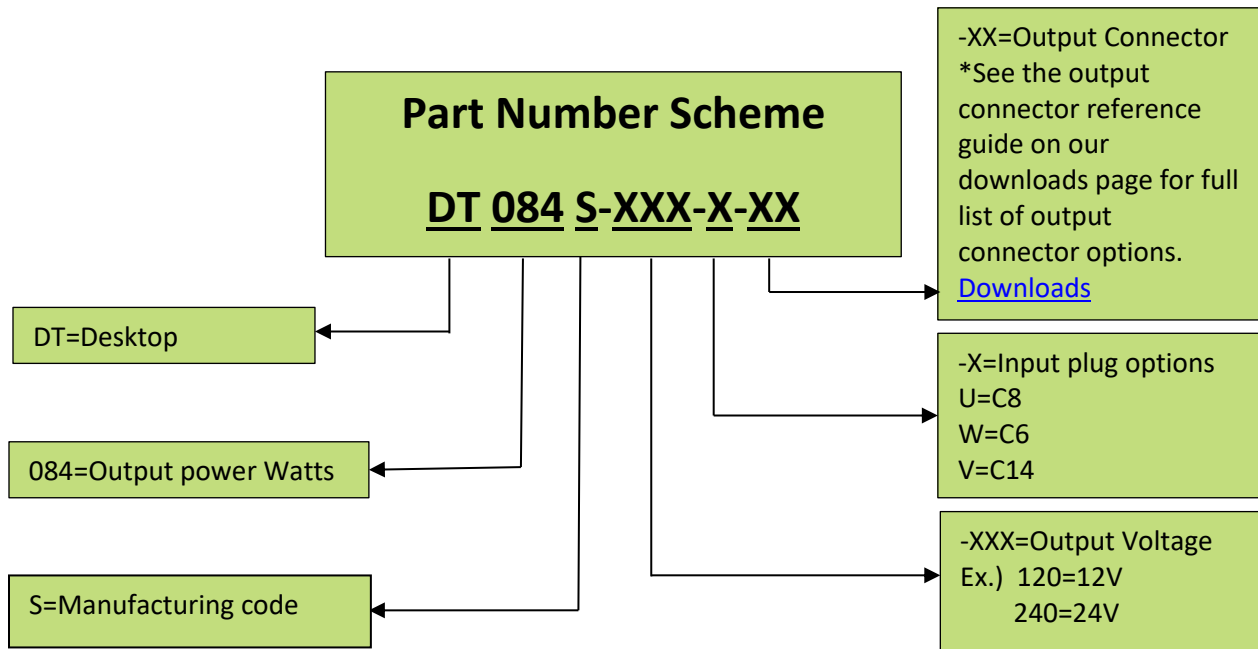

***Some Safety Agency Approvals may differ from what is shown. Contact Autec Sales!**

***Product images are for illustrative purposes only and may vary from actual design.**

***Specifications are subject to change without notice. Autec is not responsible for issues arising from errors or omissions.**