

Shenzhen Lighting Inc.

www.shenzhenlighting.com

US Distribution Center

1318 Maine Ave, Baldwin Park CA 91706

Tel: 626 338 8291



Model: SZ-W P120A

Wall pack

Wall pack | 120W

Features

- Multitude of voltage configurations: 120-277V
- Sealed die-casting profile for outdoor applications
- Replacing 50-400W MH
- Lumen output from 14400lm
- Polycarbonate optical lens with UV stabilizers
- Built-in UL class 2 driver, optional for photocell
- Easy installation, contractor-friendly design
- UL/cUL listed and DLC qualified

Specification

Model No.	SZ-WP120WA
Power	120W
LED Type	2835, 0.5W
Luminous Flux	15000-16200 LM
CRI	>80
Dimension	361*235*252MM
Input Voltage	AV 100 ~ 277V
Driver model	China Brand Driver
Certification	UL/CUL/5 Year Warranty

For sales inquiry, please contact our US office or send us an email.

info@shenzhenlighting.com

Luminaire Property

Luminaire Manufacturer:

Voltage: 120 V

Power: 119.57 W

Current: 0.9974 A

Power Factor: 0.999

Photometric Results

IES Classification: Type IV

Total Rated Lamp Lumens: 15444.7 lm

Efficiency: 100%

Upward Ratio: 6%

Central Intensity: 4728.9 cd

Pos of Max. Intensity: H90 V63

Longitudinal Classification: Very Short



Measurement Flux: 15444.7 lm

Downward Ratio: 94%

Luminaire Efficacy Rating (LER): 129.17

Max. Intensity: 6489.1 cd


Luminous Intensity Distribution Curve

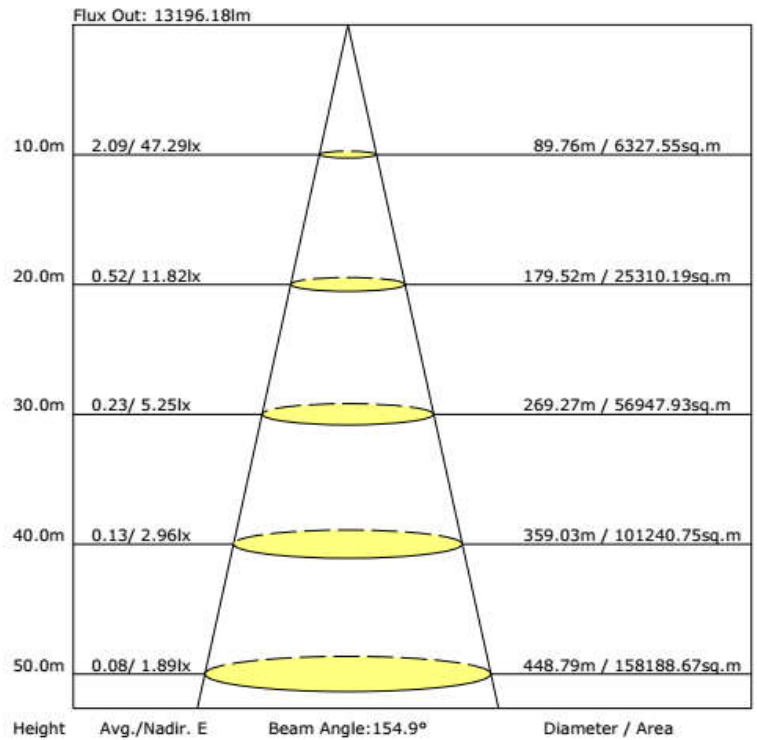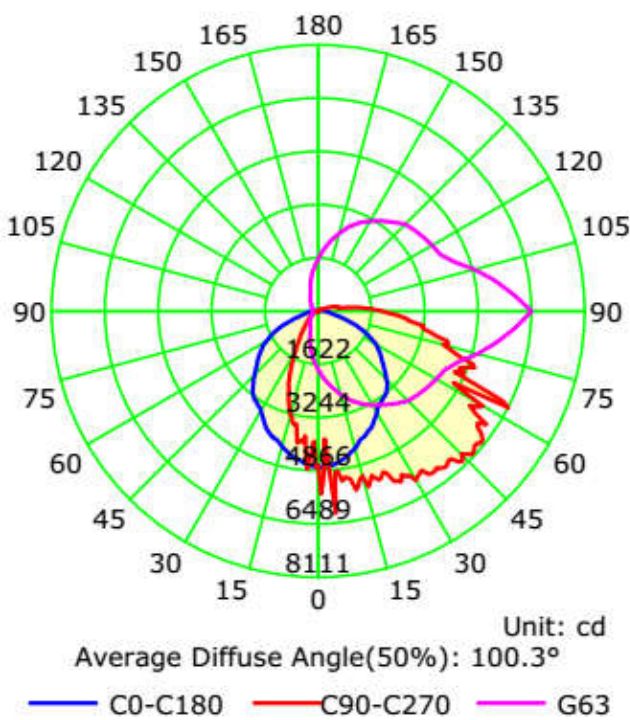

Packaging

Lamps Net Weight: 3.76kg / pc

	Size	Qty/ Carton	Weight/ Carton
Cardboard	400*300*320mm	1	4.9 KG

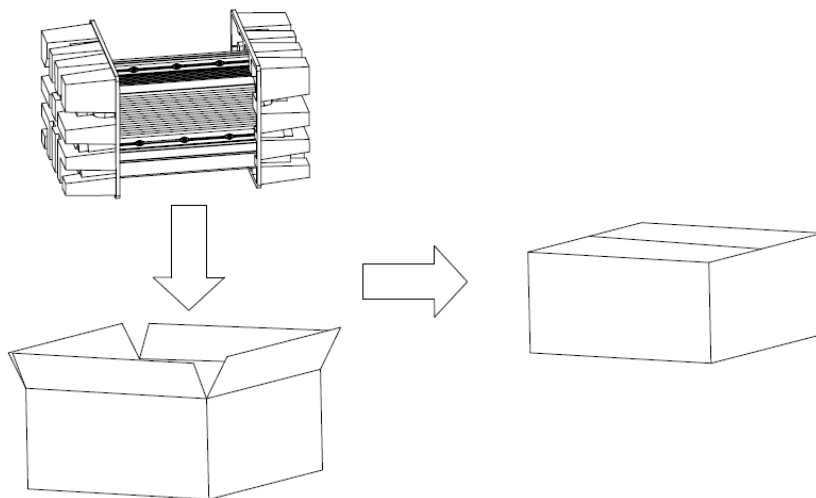

Notice For User

- Please turn off power before install or change assembly parts.
- The input voltage and lamps should be matched, after connecting the power line, Please make sure the wiring section is insulated.
- No-professionals, must not install and disassemble the lamps.

Trouble Shootings

Troubles	Check points
Flickering of the light	Turn off the power and turn on again in 3 minutes. If same phenomena occur, then call agencies
Out of working	Please check the connection

Application scenarios

