
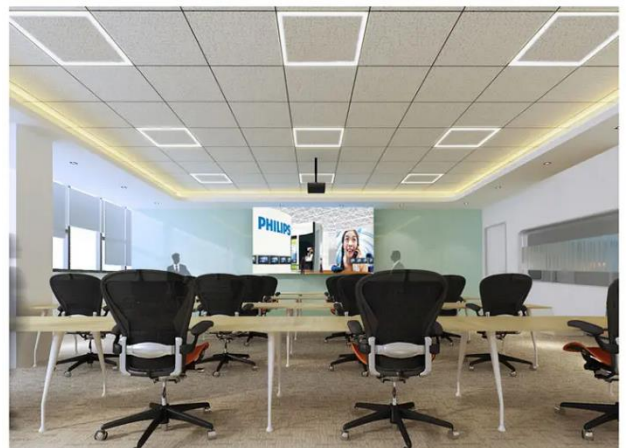



Features :

- Input Voltage:100-277VAC 50/60Hz.
- UL certified.
- 120lm/W high lumen efficacy, 80+ CRI.
- 0-10V Dimmable LED driver.
- High efficiency LM80 SMD LEDs.
- Designed for 50,000 hours lifetime.
- Instant startup, soft light, no glare, no noise.
- Easy for installation.

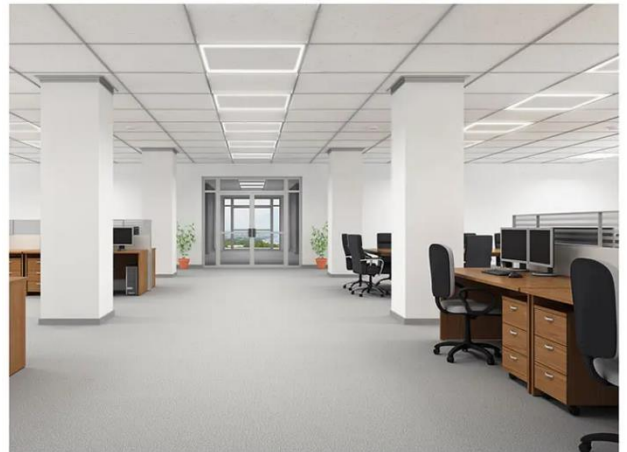

Application:

- ◆ Factory, offices .
- ◆ Living room, clubs, lobbies.
- ◆ Supermarkets, school, hotel.
- ◆ Exhibitions, etc..

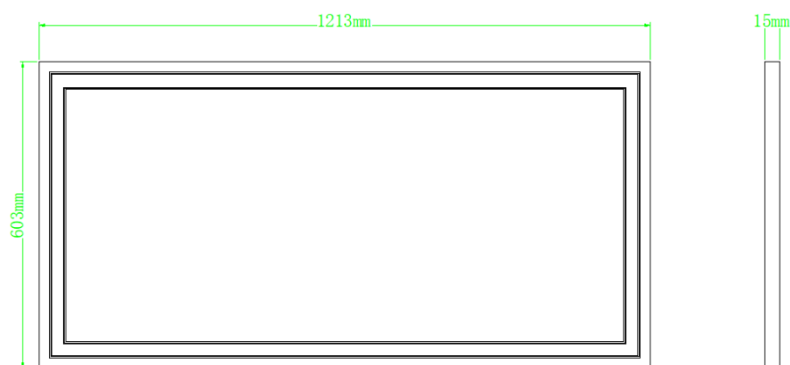Product Dimension:**Specifications**

	KIPA605N6031210 (PFL)
Wattage:	60W
CCT:	6500K
Input Voltage:	100-277VAC 50/60hz
Power Factor:	>0.9
Efficacy:	120LM/W
CRI:	>80
THD:	<20
Dimmable:	Yes
Dimensions:	2*4FT 603*1213mm
Warranty	5 years
Beam Angle:	120°
Operating Temperature:	-20°C to 50°C
IP Grade:	IP20
Certification:	UL

Package

Size	Qty/Carton	Gross Weight	Net Weight
126.3*65.3*30.8cm	10	17Kg	11Kg

Installation instructions

