



LED UFO High Bay



Model: SS-UF007-150/100/100W-H-MV-TCP (XX)

Advantage:

- UL (E467344)&DLC certificate
- 2835 Chip, high CRI
- Input voltage 120-347VAC
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, long lifespan
- Light is soft and uniform, safe to eyes
- Instant start, NO flickering, NO humming
- Green and eco-friendly without mercury.

Application:

Warehouse, factory and workshops;
Highway toll station and gas station;
Exhibition hall;
Gymnasium and supermarkets, etc.

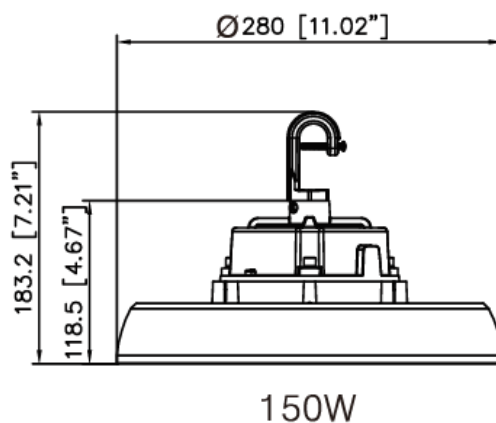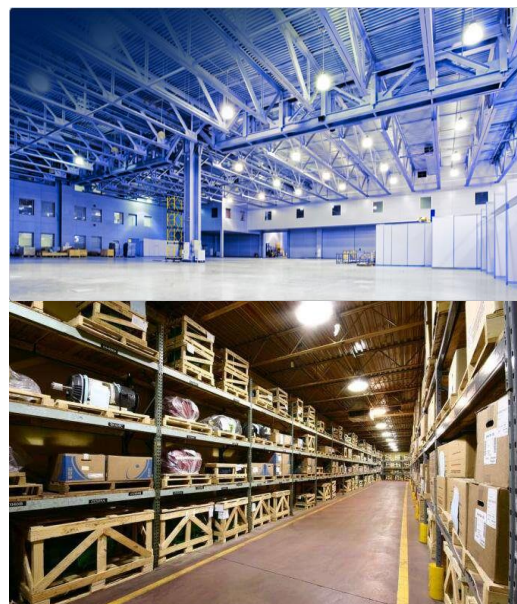

Product Specifications

Product Name	LED UFO High Bay
Light Type	SS-UF007-150/100/100W-H-MV-TCP (XX)
Dimension	Φ280*183 mm

Technical Characteristic

Color temperature	Adjustable CCT:3500K/4000K/5000K
CRI	>80
Lumen	21000LM
Lumen Efficacy	140LM/W
Input Power	Adjustable power: 150W/100W/100W
Viewing Angle	80 Degree
Input Voltage	120-347V 50/60Hz
Driver model	China Brand driver, (0-10Vdc Dimmer)
PF	>0.9
Waterproof Rating	IP65

Materials



LED Type	2835
LED QTY	456PCS
Housing	Aluminum(ADC12)
Housing color	Black
Cover	PC
Operating Temperature	-40℃ TO 45℃
Operating Humidity	10%-90% RH
Storage Temperature	-40℃ TO 80℃

Others

Storage Humidity	10%-95%
Application	Outdoor
Safety Certification	UL (E467344)&DLC
Warranty Time	5 Years

Light Distribution Testing Parameters

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	HB150W	Imax (cd)	12495	S/MH(C0/180)	1.13
NOMINAL POWER (W)	150	LOR(%)	100.0	S/MH(C90/270)	1.16
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	21300	η UP,DN(C0-180)	1.2,45.9
NOMINAL FLUX (lm)	21299.9	CIE CLASS	DIRECT	η UP,DN(C180-360)	1.4,51.5
LAMPS INSIDE	1	η up (%)	2.6	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	120	η down (%)	97.4	CIBSE SHR MAX	1.15

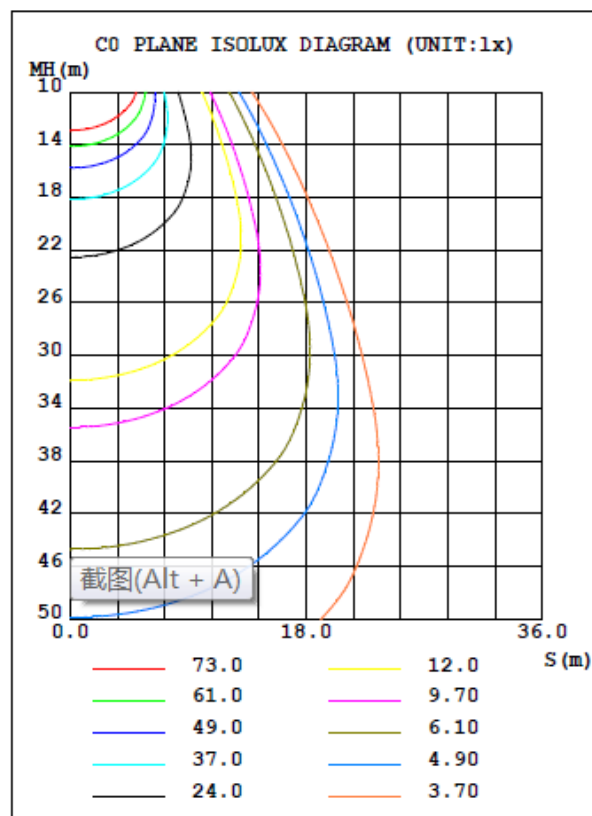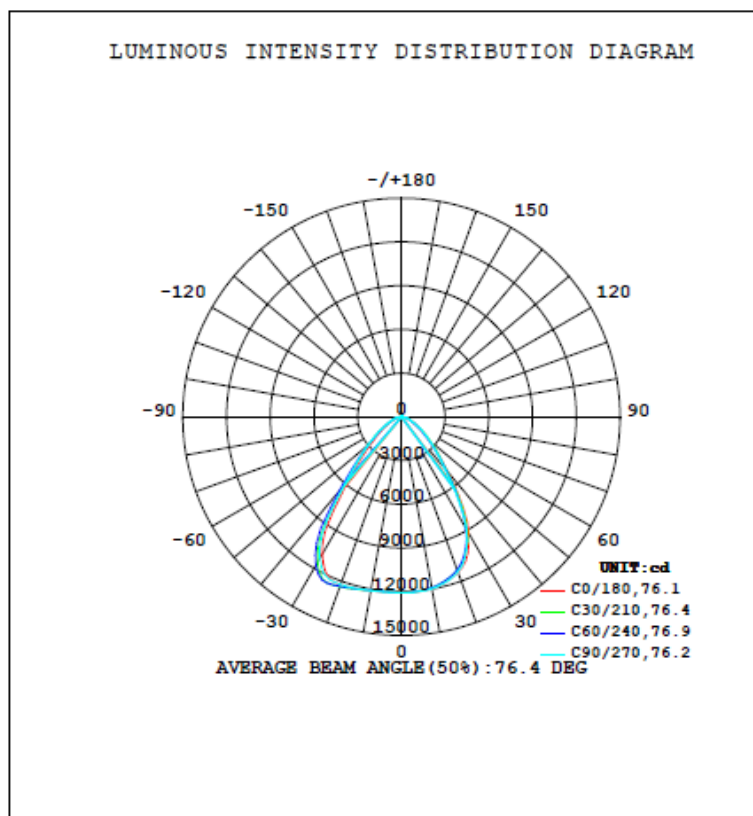

Package

Model	Net Weight	Size	Qty/Carton	Weight/Carton
SS-UF007-150/100/100W-H -MV-TCP (XX)	2.36KG	330*330*179MM	1	2.85KG