

Installation Instructions

Mounting Hardware

- #10x1-1/2" Phillips Pan Head Screw
- AF-6 Plastic Anchor

Pre-Installation Notes

The factory recommends using back up channels at stud wall conditions. This wall guard is manufactured to customer specified dimensions and cannot be cut or modified on site. To do so will VOID the warranty. The Stainless Steel Wall Guard requires a MINIMUM of 2 mounting brackets per unit/run. When splices occur (runs over 10'-0"), always use a 4" Splice Mounting Bracket.


Installation Steps


STEP 1

Establish the height of the top of the wall guard above the finished floor. Deduct 5-9/16" and snap a chalk line at that height. This marks the lowest point of the wall guard mounting bracket.

STEP 2

Determine and mark the locations of mounting brackets. For required deductions see layout guide. Align the bottom edge of the mounting bracket with the chalk line (Step 1). Using the bracket as a template, mark the locations of the top and bottom fasteners. Drill appropriate size holes in the wall

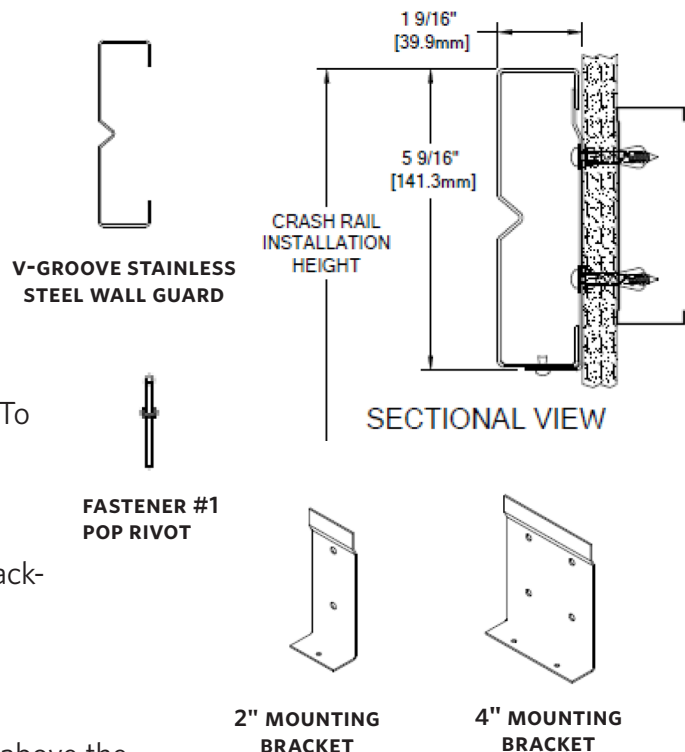

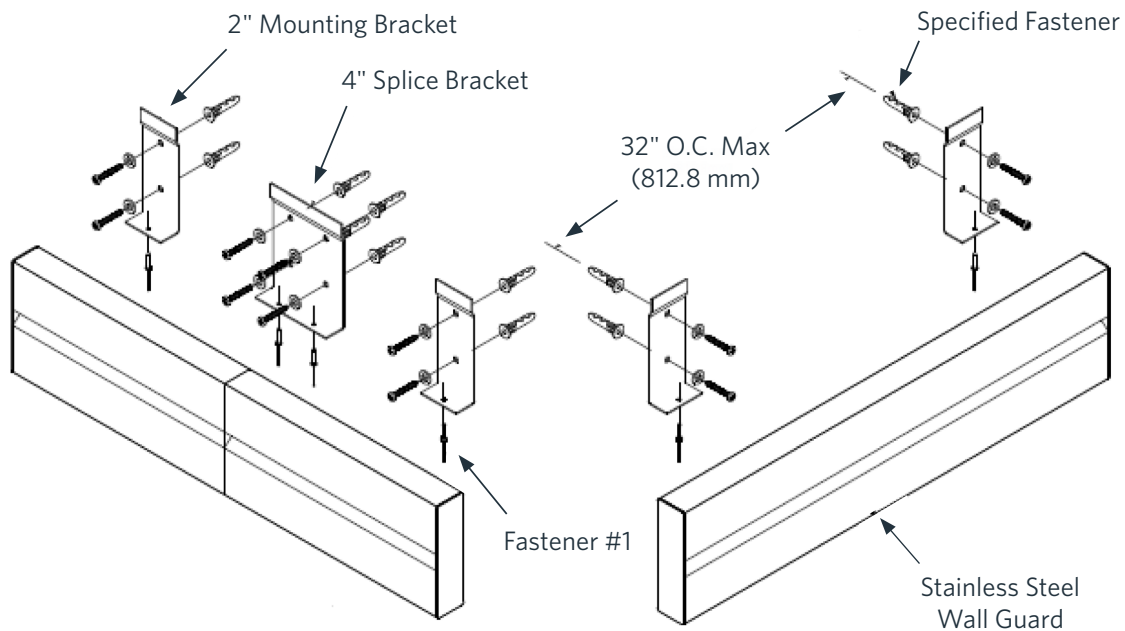

surface for the mounting hardware. See manufacturer's required drill hole sizes as listed on the fasteners (anchors). Note: Observe all safety precautions when drilling to avoid all utilities and re-bar.

STEP 3

Attach the mounting brackets to the wall surface using the required fasteners. Use a level when installing the brackets to ensure that the brackets are level.

STEP 4


Remove the plastic protective coating from the face of the wall guard.

STEP 5

Place the wall guard into position by clipping the top of the wall guard onto the mounting brackets, allowing the bottom of the rail to rest on the bottom tab of the mounting brackets.

STEP 6

Attach the rail to the mounting brackets by drilling a 9/64" hole in the bottom of the rail. Then using a stainless steel 1-1/8"x5/8" pop rivet attach the rail to the mounting bracket.

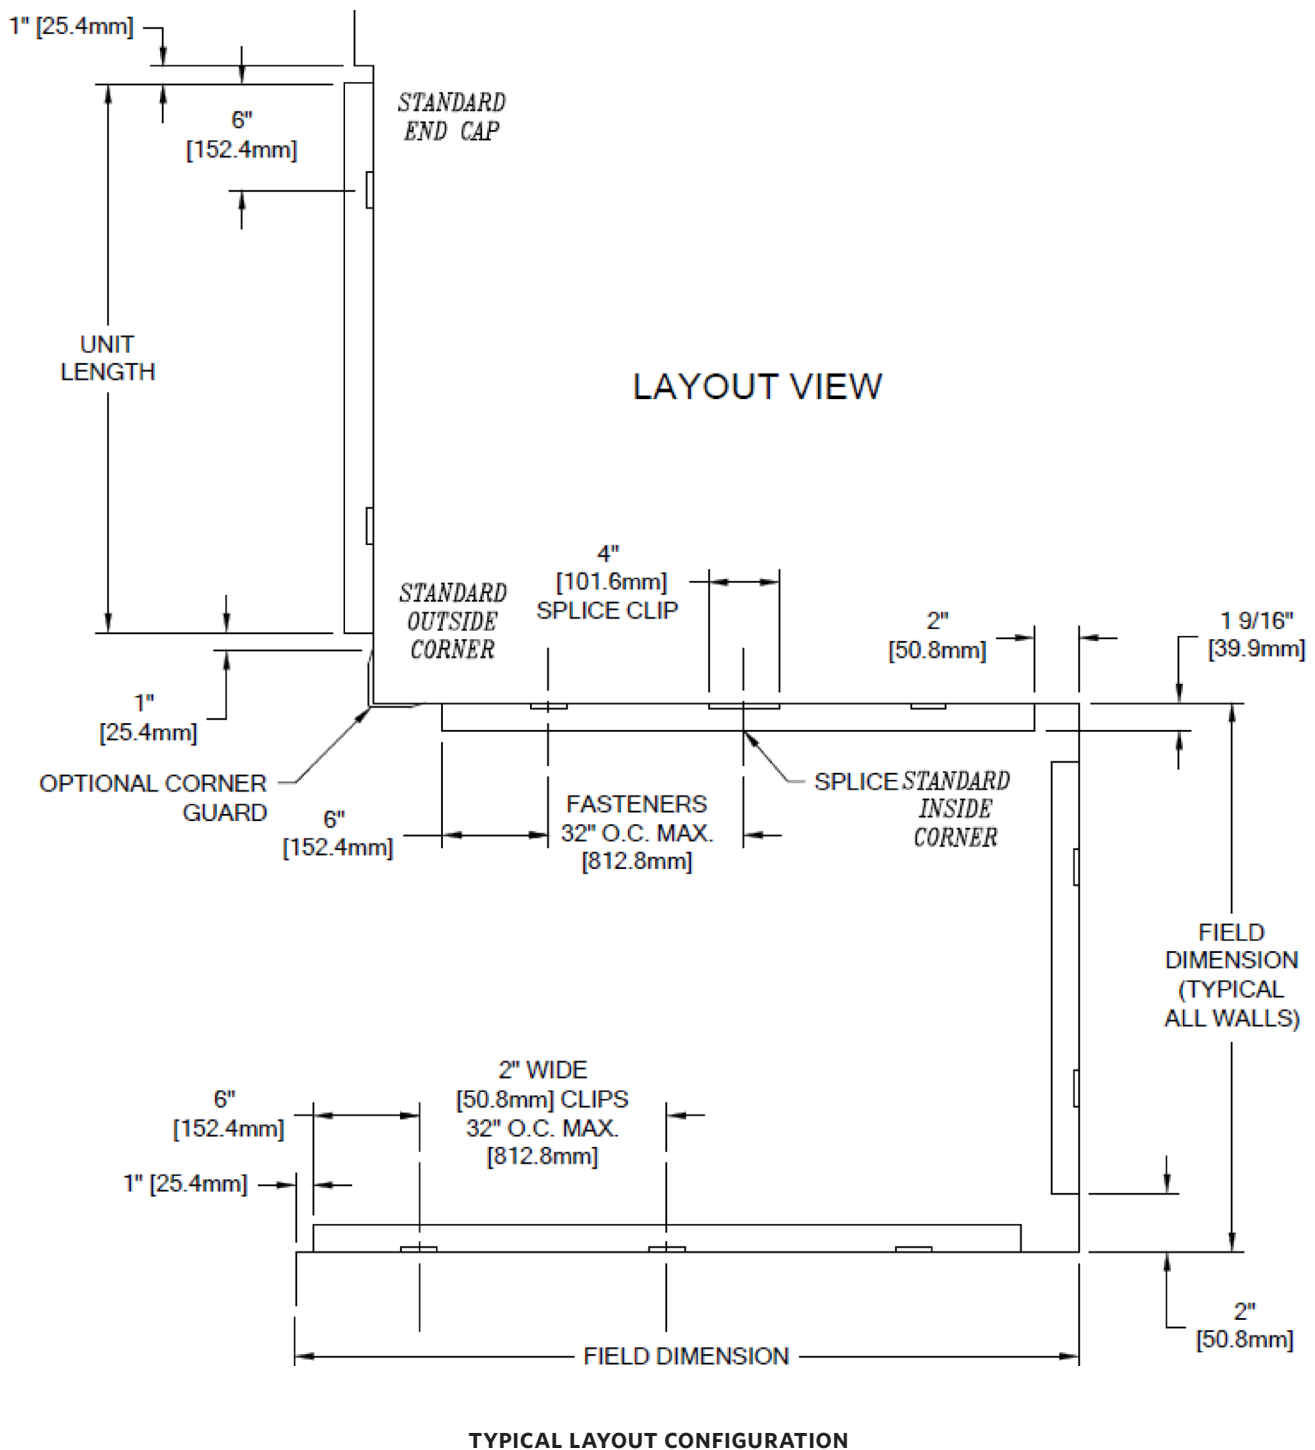



Storage & Handling

The wall guards are shipped unassembled. Upon receipt, the wall guards should be stored in the horizontal position at room temperature (65 - 75° F). This is a finished product, store in a protected clean, dry area away from direct sunlight.



Cleaning Instructions

For routine cleaning, including fingerprints, use warm water with a mild soap or an organic solvent (eg. Acetone, alcohol, methylated spirits), sponge rinse with clean water, and wipe dry following the polish lines. For tougher stains and grease use an organic solvent, mild cleaning solutions such as Jif®, or specialty stainless steel cleaners. Use a sponge, rag, or soft fiber brush to clean. Rinse well with a sponge and clean water and wipe dry following the polish lines. Always read the instructions and warning label on all cleaning products before use.



Caution

DO NOT walk on the wall guards.

DO NOT store anything on top of the wall guards.

