



SSG4650 UltraGlaze™

Structural Silicone Glazing Adhesive

Product Description

GE SSG4650 UltraGlaze is a high-strength, 2-component silicone elastomeric adhesive/sealant for a wide variety of glazing applications, including the fabrication and shop glazing of structural glazed curtainwall systems. SSG4650 provides fast adhesion and strength build; curing quickly when mixed, to a very high strength, tear-resistant durable silicone rubber.

Key Features and Typical Benefits

Performance

- **Silicone durability**—Cured silicone rubber exhibits excellent long term resistance to natural weathering including: extreme temperatures, ultraviolet radiation, rain and snow, with negligible change in elasticity.
- **High design stress**—30 psi (0.20 MPa) allowable stress to reduce necessary bonding width.
- **Primerless adhesion**—Attains strong bonds to many conventional substrates and finishes without the need of a primer.
- **Low pumping viscosity**—Decreased stress on equipment can lead to longer pump life and reduced maintenance costs.
- **Fast adhesion build**—Enhances early stability of assembled parts.
- **Protective glazing**—SSG4650 offers an excellent combination of strength, flexibility and tear resistance to help counter the higher forces created by hurricane, impact and blast loads.
- **Product compatibility**—Compatible with GE Insulating Glass, Structural and Weathersealing silicones.

Application

- **Adjustable work life**—Variable ratio of parts A+B to accommodate assembly and application under varying conditions.
- **High application rate**—Faster and more thorough joint filling capability with easier tooling effort.

Aesthetics

- **Catalyst options**—Non-flammable catalyst available in black and grey.
- **Materials**—Compatible with many types of coated glass, metal finishes, glazing gaskets, setting blocks and spacers.

Potential Applications

SSG4650 is an excellent candidate for use:

- In structural glazing applications such as factory glazing of curtainwall units and modules for unitized and panelized systems.
- In *protective glazing* applications.

Colors

SSG4650 UltraGlaze is available in black and medium grey.



Black



Medium Grey

SSG4650A + SSG4650B BLACK SSG4650A + SSG4650B GREY




Packaging

SSG4650 UltraGlaze is available as a “kit” containing the following:

Base: **SSG4650A** base, white paste in 55 gallon (200 liter) drum with a polyethylene liner.

Catalyst: There are two catalyst options for use with SSG4650A UltraGlaze base and are supplied in a 5 gallon (20 liter) pail.

- **SSG4650B BLACK** catalyst, black paste mixes and cures to black silicone rubber
- **SSG4650B GREY** catalyst, grey paste mixes and cures to medium grey silicone rubber
- Both the drum and pail are straight-sided for use in commercially available pumping equipment.

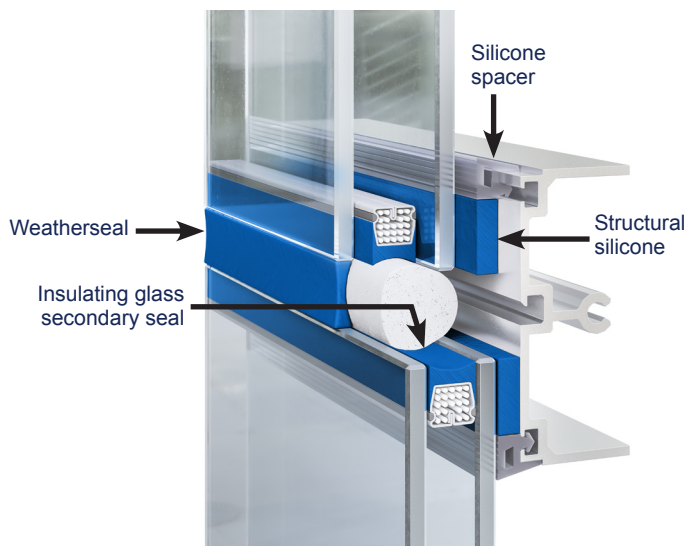

Typical SSG configuration

Typical Physical Properties

Typical property values of SSG4650 as supplied and cured are set forth in the tables below. Assistance with specifications is available by contacting Momentive Performance Materials (MPM).

Typical Properties—Supplied

Uncured Properties	Base	SSG4650A
Color	White	Thixotropic Paste
Specific Gravity	1.40	kg/liter
Shelf Life	24 months ⁽¹⁾	
Uncured Properties	Catalyst	SSG4650B BLACK
Color	Black	Thixotropic Paste
Specific Gravity	1.04	kg/liter
Shelf Life	12 months ⁽¹⁾	
Viscosity	129.6 / 129,600	10 r/s, Pa·s / centipoise
Uncured Properties	Catalyst	SSG4650B GREY
Color	Black and Grey	Thixotropic Paste
Specific Gravity	1.10	kg/liter
Shelf Life	12 months ⁽¹⁾	
Viscosity	163.5/ 163,500	10 r/s, Pa·s / centipoise

Mixed Compound Properties

SSG4650A + SSG4650B		
	Base	
Color	Black or Medium Grey	Thixotropic Paste
Mix Ratio Range	9:1 to 14:1, target 11:1 to 13:1	By weight
Specific Gravity	1.38 @ 12.1	kg/liter
Work Life	20-65 minutes	Depends on ratio, temp. & RH
Tack Free Time	1-2 hours	Depends on ratio, temp. & RH
Consistency/Sag	0.1" (2.5 mm)	Non-sagging
VOC Content	<30 g/l	Mixed at 12:1 weight

Typical properties are average data and are not to be used as or to develop specifications.

(1) When properly stored; see section on storage.



Typical Physical Properties—continued

Cured Properties⁽³⁾


SSG4650A + SSG4650B at 12:1 by weight ratio Full Cure at Standard Laboratory Conditions			Measured as per ETAG002
Color	Black or Medium Grey	SSG4650B BLACK or SSG4650B GREY	
Hardness (type A indenter)	42-47	ASTM D2240	46
Ult. Tensile Strength Modulus @ 25% extension Modulus @ 50% extension Ult. Elongation	206 psi (1.42 MPa) 70 psi (0.48 MPa) 127 psi (0.88 MPa) 207%	ASTM C1135; t=0.25in	1.34 MPa 0.62 MPa 0.85 MPa 191%
Tensile Adhesion Strength after 24 hours	>125 psi (0.86 MPa)	ASTM C1135	
Tear Strength	45 ppi (7.9 N/mm)	ASTM D624	
Shear Strength	193 psi (1.33 MPa)	ASTM C961	1.04 MPa
Resistance to Tearing	No Propagation	ASTM C1681	Pass
Resistance to Water Immersion	Excellent, no adhesion loss ⁽²⁾	ISO 10591	Excellent, no adhesion loss
Accelerated Weathering, 5000 hours (0.57 years)	Negligible property change	ASTM C1135, D2240	Negligible property change
Heat Resistance	300°F (149°C)		
Thermal Conductivity	0.30 W/m·K (cal/cm·s °C)	ASTM E1461	
Tensile Design Stress	30 psi		0.20 MPa
Shear Design Stress	22 psi		0.15 MPa

(Due to specific differences in test parameters of ASTM & ETAG standards, some variation in the values of the same measured property is expected)

Typical properties are average data and are not to be used as or to develop specifications.

(2) Tested to glass and the following aluminum finishes: polyester powder coat, PVDF, anodized.

(3) Typical value, actual value may vary.

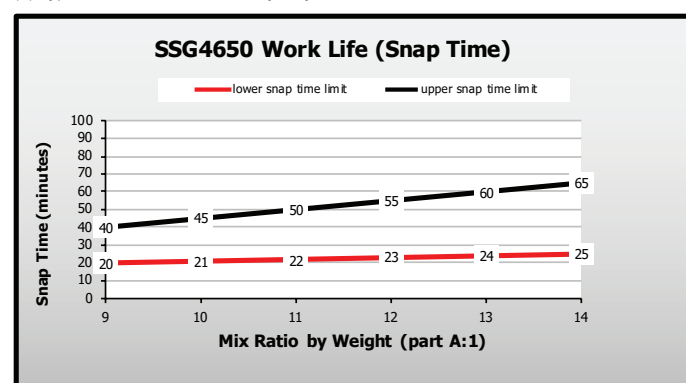

Graph is relevant to ambient conditions; see also section on Curing.

SSG4650A/SSG4650B BLACK Weight to Volume Ratio Correlation

9:1 by weight	(6.7:1 by volume)
10:1 by weight	(7.4:1 by volume)
11:1 by weight	(8.2:1 by volume)
12:1 by weight	(8.9:1 by volume)
13:1 by weight	(9.7:1 by volume)
14:1 by weight	(10.4:1 by volume)

SSG4650A/SSG4650B GREY Weight to Volume Ratio Correlation

9:1 by weight	(7.1:1 by volume)
10:1 by weight	(7.9:1 by volume)
11:1 by weight	(8.6:1 by volume)
12:1 by weight	(9.4:1 by volume)
13:1 by weight	(10.2:1 by volume)
14:1 by weight	(11.0:1 by volume)

Installation

Prior to production, a sample of base (part A) and catalyst (part B) should be taken from each lot of material to be used, weighed to the desired A/B ratio, mixed and checked for proper curing before placing material in production.

Refer to **QC & Application Guidelines—GE UltraGlaze Sealants** for Surface Preparation requirements, design information and detailed application instructions.



Installation—continued

Surface Preparation

Sealants may not adhere or maintain long-term adhesion to substrates if the surface is not prepared and cleaned properly before sealant application. Using proper materials and following prescribed surface preparation and cleaning procedures is vital for sealant adhesion. MPM can provide quality control information and suggestions to users upon request.

Materials

- Use clean, fresh solvent as recommended by the MPM project-specific test report. When handling solvents, refer to manufacturer's SDS for information on handling, safety and personal protective equipment. Isopropyl Alcohol (IPA) is commonly used and has proven useful for most substrates encountered in SSG systems. MEK and Acetone have also been useful on specific substrates. Do not use Denatured Alcohol. Denatured Alcohol is not suggested because of the variability of additives, which may or may not provide reproducible results.
- Use only clean 99.9% pure industrial grade solvents. Do not use diluted solvents.
- Use clean, white cloths free of lint or other suitable lint-free wiping materials.
- Use a clean, narrow-blade tooling knife when tooling structural silicone into the cavity.
- Use primer when required (reference MPM project-specific adhesion test report (s)).

Cleaning Procedures

- Remove all loose material (such as dirt and dust), plus any oil, frost or other contaminants from the substrates to which the structural silicone will be applied to.
- Do not use detergent to clean the substrate as residue may be left on the surface.
- Clean the substrates receiving the sealant as follows: Using a two-rag wipe technique. Wet one rag with solvent and wipe the surface with it, then use the second rag to wipe the wet solvent from the surface BEFORE it evaporates. Allowing solvent to dry on the surface without wiping with a second cloth can negate the entire cleaning procedure because the contaminants may be re-deposited as the solvent dries.

- Change the cleaning rags frequently, as they become dirty. It is easier to see dirt if white rags are used. Do not dip used wipe cloths into solvent as this can contaminate the solvent. Cleaning with contaminated solvent can result in sealant adhesion issues. Always use clean containers for solvent use and for solvent storage.
- When cleaning deep, narrow joints, wrap the cleaning cloth around a clean, narrow-blade putty knife. This permits force to be applied to the cleaned surface.
- Clean only as much area as can be sealed in one hour. If cleaned areas are again exposed to rain or contaminants, the surface must be cleaned again.

Primers

SSG4650 will bond to many clean surfaces without the aid of a primer. For difficult-to-bond substrates, the use of a primer or special surface preparation should be evaluated. An evaluation should be made for each specific application/substrate to determine quality of bond. When properly used, primers help assure strong and consistent sealant adhesion to surfaces that may be difficult to bond. Most primers are a blend of organic and inorganic chemicals, resins and solvents. NEVER APPLY PRIMER TO CURED SILICONE RUBBER WITHOUT PRIOR CONSULTATION WITH MOMENTIVE PERFORMANCE MATERIALS TECHNICAL SERVICES. Obtaining the proper materials, as well as following the prescribed procedures, is vital to ensure the successful use of primers. PRIMER APPLICATION IS NOT A SUBSTITUTE FOR SURFACE PREPARATION. Consult primer datasheet(s) for specifics and instructions for use.

CAUTION

Primers may contain solvents. When handling solvents, refer to manufacturer's SDS for information on handling, safety and personal protective equipment.

Masking

- To simplify clean up of excess sealant, use easy to release, pressure sensitive tape to mask adjacent surfaces before applying the structural silicone sealant.
- Start from the top down and overlap the runs. Tool in direction of over-lap so that masking is not disturbed during tooling.
- Remove masking immediately after application of silicone or as soon as practical.
- Drop cloths can be used to cover any surfaces likely to collect excess sealant removed during tooling operations.



Installation—continued

Sealant Application

- Apply the sealant by pushing the bead ahead of the nozzle and making sure that the entire cavity is filled. Tooling should be done neatly, forcing the sealant into contact with the sides of the joint, thus helping to eliminate any internal voids and assuring good substrate contact.
- Sealant application is not recommended when the temperature is below 40°F (5°C) or if frost or moisture is present on the surfaces to be sealed. Contact MPM Technical Services prior to use if temperatures are below 40°F (5°C)
- SSG4650 works best when applied to surfaces below 104°F (40°C).
- Due to the smooth consistency of SSG4650, tooling agents such as water, soap or detergent solutions are not necessary or recommended. Dry tooling is recommended.

Mixing, Pumping and Dispensing

- SSG4650 should be mixed and dispensed using suitable two- component mixing equipment, available from several equipment manufacturers. These mixing / pumping systems are specifically designed to meter precise proportions of A base and B catalyst, in an air-free environment, and mix and dispense material at proper pressures and volumes to insure thoroughly mixed air-free material. Reference MPM SSG *Technical Manual & Quality Control Information* document regarding suitable equipment type for use with SSG4650.
- Consult mixing equipment manufacturer or system operating manual for startup and shutdown procedures that cover proper operating pressures, mixing devices, and purging requirements.
- Hand mixing of A base + B catalyst is not recommended, except for pre-use testing to confirm cure.
- Kit matching of the A and B components of SSG4650 is not required.
- SSG4650 can be used successfully in both “In-line” mixing systems and on “purgeless” after-the-gun mixing equipment. Consult equipment manufacturer and/or MPM for information on mixing device options.
- When properly mixed, the material should be a solid, homogeneous color (black when using SSG4650B BLACK catalyst, grey when using SSG4650B GREY catalyst) largely free of any swirling or marbling of colors. If incomplete mixing is noticed, cease use of the material until equipment has been adjusted and confirmed that a thorough mix is being attained.

Curing

- When mixing SSG4650A base + SSG4650B catalyst at approximately a 12:1 weight ratio, the material will become tack-free after about 1-2 hours under ambient conditions of @ 70°F (21°C), 50% R.H. Under these conditions approximately 70% of strength should develop within 24 hours. Development of full properties requires full liberation of cure by-products and will normally be achieved within 7 days. Full properties will take additional time in colder climates or deeper SSG cavities.
- Work life and cure rate may be adjusted by changing the A base to B catalyst ratio. Ratio must be within recommended range to achieve desired cured material property profile.
- Work life and cure rate can be affected by temperature and humidity levels. Mild heat (i.e., around 104°F/40°C) will shorten the work life of the material, but will not significantly reduce the time required for complete cure. Cooler temperatures and lower humidity (i.e., <50°F (10°C) and <30% R.H.) tend to slow the cure and adhesion process.
- The B catalysts are sensitive to prolonged exposure to atmospheric moisture and the storage containers should be kept tightly closed whenever possible to maximize useful life.
- The catalyst will require mixing before placing container in pumping equipment if settling of components has occurred. Contact MPM technical services for additional information.

Adhesion

Development of maximum bond strength will depend on substrate finish, joint configuration, primer use, adhesive width, substrate preparation and ambient conditions at location of use. Minimum stress should be applied to the adhesive bond for 24 hours. The adhesive strength of the bond should eventually exceed the cohesive strength of the silicone rubber adhesive.

Maintenance and Repairs

If repairs are required, the following products are candidates for use: SSG4650, SSG4600, SSG4000, SSG4000AC, SSG4000E, SSG4800J, SCS2000. Reference MPM SSG *Technical Manual & Quality Control Information* document regarding specific requirements for substrate preparation when reglazing.



Installation—continued

Joint Designs and Dimensions

Contact width calculation will depend on the applicable standards. Please contact MPM Technical Services team for detailed review of design.

A minimum sealant thickness of $\frac{1}{4}$ " (6 mm) between substrates is required to accommodate thermal expansion and contraction (see Figure 2) of most systems and should be used in order to ensure that sealant can be injected into the structural cavity obtaining full contact with both the glass and metal surfaces while remaining free of voids. Greater joint thickness may be required to accommodate movement in some larger-sized SSG systems. MPM can be contacted to assist in determination of proper joint thickness to accommodate expected movement, in structurally glazed applications.

Pre-Construction Project Requirements

Required materials for submission:

- Curtainwall shop drawings for review and comment
- Design wind load requirement(s) for project
- Glass or panel sizes
- Production samples of metal, glass, gaskets, spacers and setting blocks with type and manufacturer identified
- Specification and/or identification of paint or finish to which SSG4650 is intended to adhere (*i.e.*, 215-R1 anodized or if paint, or powder coat; manufacturer, finish system and ID#)

Recommendations & information provided after review:

- Determination as to whether the submitted joint dimensions meet the minimum design criteria necessary for the use of SSG4650 series.
- Short-term adhesion data using (typically) ASTM C794, C1635, ISO 8340, ISO 8339, ISO 10591 and/or ASTM C1135 test method. Other test methods may be requested for a nominal charge.
- Short-term compatibility test results on gaskets, spacers and setting blocks and other accessories per ASTM C1087 or GE sealants test method for compatibility.
- Information regarding suggested primers, when required.

Figure 1:


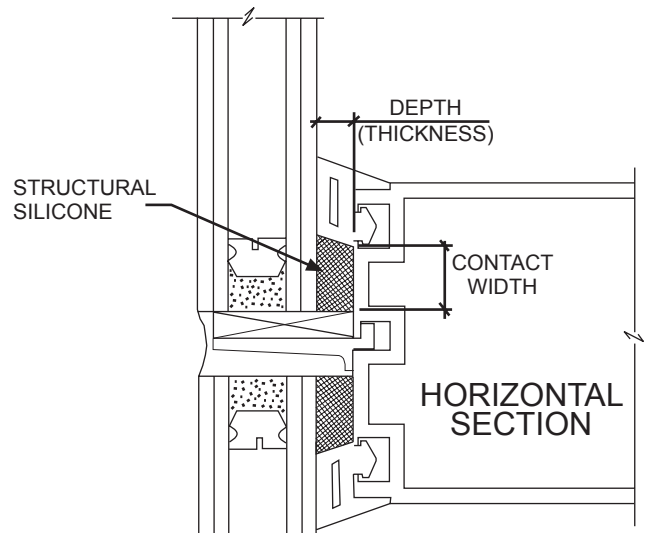


Figure 2: Movement from thermal expansion and contraction and/or glass rotation.



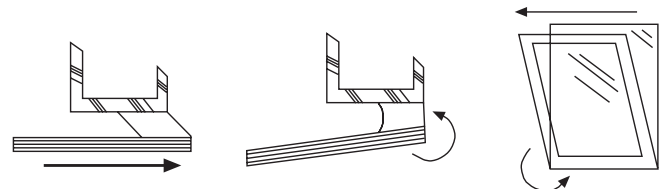

Installation—continued

Momentive Performance Materials will not:

- Provide comments on the structural integrity of overall framing system(s).

The design professional has final responsibility for the determination of structural sealant joint dimensions based on project conditions, design wind load(s), glass or panel sizes, anticipated thermal, seismic or other movement of the system.

Industry References

The ASTM C1401 Standard Guide for Structural Sealant Glazing provides a thorough overview of design topics and information for use in SSG systems.

China's national standard offers curtainwall design guidance related to SSG. Ref. JGJ 102.

Applicable Standards

SSG4650 meets or exceeds the requirements of the following specifications for two-component sealants.

EOTA ETAG002 Guideline for European Technical approval for Structural Sealant Glazing kits.

ASTM Specifications:

- C1184, Type M, Use G and O (aluminum)

China Specification:

- GB16776-2005

Technical Services

Additional technical information and literature may be available from MPM. Laboratory facilities and application engineering are available upon request from MPM. Any technical advice furnished by MPM or any representative of MPM concerning any use or application of any product is believed to be reliable but MPM makes no warranty, express or implied, of suitability for use in any application for which advice is furnished.

- Structural glazing industry guidelines (ASTM C1401) suggest that drawings and details are to be reviewed by all parties involved in the manufacture of an SSG system and for each building project. SSG4650 should be used in structural glazing applications only after MPM has reviewed detailed design drawings and has performed adhesion and compatibility tests on project substrates and relevant spacer materials. Review and testing is done on a project-by-project basis. No blanket approval is given by MPM for structural glazing applications.
- MPM requires testing on a project-by-project basis each substrate and component used in a structural glazing assembly for adhesion and compatibility. No blanket approvals exist relative to adhesion or compatibility of SSG4650 with such materials.

Limitations

Customers must evaluate MPM products and make their own determination as to the fitness of use in their particular applications.

- Not recommended for water immersion applications.

Patent Status

Nothing contained herein shall be construed to imply the nonexistence of any relevant patents or to constitute the permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of the patent.

Product Safety, Handling and Storage

SSG4650A base should be stored at or below 90°F (32°C). SSG4650B BLACK and SSG4650B GREY catalyst must be stored at or below 90°F (32°C). Keep containers out of direct sunlight for prolonged periods. These materials may be shipped at ambient temperature.

Customers considering the use of this product should review the latest Safety Data Sheet and label for product safety information, handling instructions, personal protective equipment if necessary, and any special storage conditions required. Safety Data Sheets are available at www.gesilicones.com or, upon request, from any MPM representative. Use of other materials in conjunction with MPM sealants products (for example, primers) may require additional precautions. Please review and follow the safety information provided by the manufacturer of such other materials.



Customer Service Centers

For additional information, please contact our [Customer Service Team](#)

AMERICAS	+1 800 295 2392 Toll Free* +1 704 805 6946 Direct Number
LATIN AMERICA	BRAZIL +55 11 4534 9650 Direct Number MEXICO +52 55 2169 7670 Direct Number *All American countries
EMEA – EUROPE, MIDDLE EAST, AFRICA & INDIA	EUROPE +390510924300 Direct Number INDIA, MIDDLE EAST & AFRICA +91 44 71212207 Direct Number* *All Middle Eastern countries, Africa, India, Pakistan, Bangladesh, Sri Lanka
ASIA PACIFIC	CHINA 800 820 0202 Toll Free +86 21 3860 4892 Direct Number JAPAN +81 3 5544 3111 Direct Number KOREA +82 2 6201 4600 Direct Number SOUTH EAST ASIA, AUSTRALIA & NEW ZEALAND +60 3 9206 1543 Direct Number* *All East Asia countries (Malaysia, Singapore, Thailand, Indonesia, Vietnam, Philippines, Cambodia, Myanmar / other countries located in Pacific region)
Visit us at www.gesilicones.com	

THE MATERIALS, PRODUCTS AND SERVICES OF MOMENTIVE PERFORMANCE MATERIALS INC. AND ITS SUBSIDIARIES AND AFFILIATES (COLLECTIVELY "SUPPLIER"), ARE SOLD SUBJECT TO SUPPLIER'S STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SUPPLIER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN SUPPLIER'S STANDARD CONDITIONS OF SALE, SUPPLIER AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBE HEREIN. Each user bears full responsibility for making its own determination as to the suitability of Supplier's materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating Supplier's products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of Supplier's standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Supplier. No statement contained herein concerning a possible or suggested use of any material, product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Supplier covering such use or design, or as a recommendation for the use of such material, product, service or design in the infringement of any patent or other intellectual property right.

GE is a trademark of General Electric Company. Used under trademark license.

Momentive is the exclusive partner licensed by the General Electric Company to develop and manufacture GE Silicones coatings and sealants.

The use of the "™" symbol designates registered or unregistered trademarks of Momentive Performance Materials Inc. or its affiliated companies.

Copyright 2018-2022 Momentive Performance Materials Inc. All rights reserved.

www.gesilicones.com