









Contents

Introduction Welcome to Schweigen 02 Benefits of a Schweigen silent rangehood 03 Commitment to design, quality and innovation 04 Schweigen – proudly Australian 05 German engineered and manufactured 06 A Climate Positive Organisation 07 The Schweigen silent story 08 Powerful extraction 09 3 times more energy efficient 10 Schweigen SteelFlex™ High Performance Safety Ducting 11 Perimeter Aspiration 12 Balanced Aspiration 13 How to select your perfect rangehood 14-15 Silent Isodrive® Motor Isodrive® motor range 53 Complete ventilation solutions 54 Technical information 55-56 The Schweigen Experience Local customer service 57 Product and cooking discovery sessions 58 Showroom locations 59 60 Frequently asked questions Optional accessories and parts 61 Product selector 62-63

Products



Undermount Rangeho	ods
GA-600S	17
GA-900S	17
GA-1200S	17
KLS-9GLASS	18
KLS-9GLASSBLKS	18
UM1170-6S	19
UM1170-9S	19
UM1170-6BS	20
UM1170-9BSS	20
UM-PA9S	21
UM-9S	22
UM-12UMS	22
UM1390-6S	23
UM1390-9S	23
UM1390-12S	23



Wallmount Rangehood	S
WM-LIN9S	25
KLS-ALBW9S	26
KLS-ALBB9S	26
DS3131-R2S	27
DS3326-9S	28
DS3326B-9S	28
WM-EX90S	29
DS3170S	30
DS3170-12S	30
WM2190-6S	31
WM2190S	31



Ceiling Cassettes	
CC-SURF2S	33
CC-INARTS	34
CC-PARA	35
SCC1000-S	36
SCC1200-S	37
UM4220-12S	38
UM422G-12S	38



Island Rangehoods	
IS4110S	40
Open plan living	41



BBQ Alfresco Rangeh	oods
CLUM12S	43
CLUM15S	43
CL88123	44
CL88155	44
CL7272S	45
CL7275S	45
CL8812	46
CL8815	46
CLUM10	47
CLUM12	47
CL6272	48



Silent Exhaust Fans	
BR500, BR500ST	50
BRW600	51
BRB700	52





The Silent Ventilation Experts.

Schweigen is the only 100% Australian owned climate-positive company behind bestselling silent rangehoods supporting Australian manufacturing and jobs. Our profits remain in Australia, supporting our local economy.

Designing Australia's most efficient silent rangehoods made and manufactured in Europe, we have built a reputation for providing innovative, stylish and premium appliances through more than 900+ leading retailers nationwide.

Our revolutionary silent rangehood systems work by removing the fan and motor from the rangehood and mounting it outside the home, so you enjoy blissful silence where you cook.

The German-made Schweigen Isodrive® motors are amongst the most energy efficient in the market, requiring just 57 watts of power to run, in comparison to competitor products which use a minimum of 180 watts.

With sleek designs, extreme durability, and versatile features, our products combine the best of European styling and Australian durability.

Silent, powerful, beautiful - what more could you want from a rangehood?





"We have built an enviable reputation by offering the finest silent rangehood solution in the market today. Our partnership with European designers and manufacturers allows us to continue to bring quality appliances with outstanding value to Australian homes."

Anterteles

Anthony Fletcher. Co-Owner, Schweigen

Benefits of a Schweigen silent rangehood.



SILENT

The Isodrive® motor is silent - removed from the rangehood and mounted outside the home.



10 YEAR WARRANTY

Offering customers peace of mind with a full 10 Year Warranty on all Isodrive® motors.*



LIFETIME FILTER WARRANTY

Easy to remove, dishwasher safe, and guaranteed for the life of the filter.***



COMPLETE VENTILATION SOLUTIONS

From indoor to outdoor rangehoods, externally mounted to in-wall motors, Schweigen has all your ventilation needs covered.



AUSTRALIAN OWNED

We are an Australian owned, family business, that prides itself on delivering quality products built for the harsh Australian climate.



POWERFUL

Our rangehoods extract heavy steam, smoke and unwanted cooking odours, leaving your kitchen fresher for longer.



LIFETIME LED LIGHT REPLACEMENT

We are so confident our energy efficient LED lights will stand the test of time, we provide a replacement warranty for the life of your rangehood.***



CORPORATE PARTNER OF KBDI

Schweigen is proud to be a Corporate Partner for the Kitchen & Bathroom Designers Institute.



MANUFACTURED AND ENGINEERED IN GERMANY

Built with quality and precision, the Schweigen silent Isodrive® guarantees performance and reliability for many years to come.



ENERGY EFFICIENT

Using a mere 57 watts to deliver high powered efficiency and energy savings of more than 300%.**



FREE STEELFLEX™ DUCTING

Every silent rangehood package includes Schweigen SteelFlex™ high performance safety ducting for unbeatable value, safety and performance.



SERVICE & INSTALLATION

An Australian based Customer Support team offers you the service and installation network you'd expect from such a premium product.***

^{*} Isodrive® motor has a 10 year product warranty. This Warranty covers fan and motor units only. For more information please refer to your warranty card. Excluding the BR500. ** Efficiency varies between power options.

^{***} The period during which the Lifetime Filter Warranty is in effect will depend upon the life of your appliance. *** The period during which the Lifetime LED Light Replacement is in effect will depend upon the life of your appliance. **** Does not apply to remote and rural areas in Australia.



Commitment to design, quality and innovation.


Schweigen has always been committed to providing products which focus on design excellence. To enhance the quality of kitchen designs, we strive to be a brand that you can trust. Every Schweigen rangehood is built according to the highest European standards, an assurance that we can pass onto our customers.

Simple yet elegantly designed,
Schweigen rangehoods are integrated
seamlessly into the modern kitchen and
convey innovative technology. Current
trends see island bench-tops turning the
kitchen into the hub of the home. The key
benefit of a silent Schweigen rangehood
means you don't have to speak over
a noisy appliance, making the kitchen
especially inviting to family and friends.

Although silent, a Schweigen rangehood proves incredibly powerful, providing the optimal solution for the family home.

This allows for experimentation with international cuisine without the worry of lingering odours throughout the home. The commitment to design without compromising on functionality is our ethos. Therefore we are Australia's number one selling silent rangehood company.



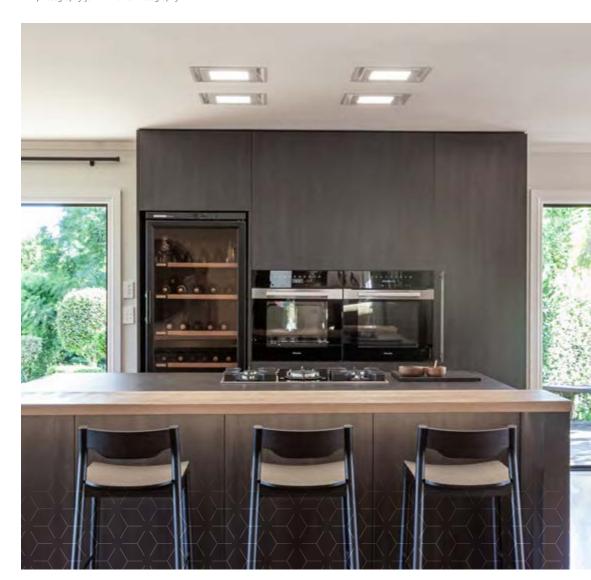







Schweigen – proudly Australian.

Australian owned and operated - 100% of our profits stay in Australia.

Schweigen has come a long way from its humble beginnings in Clayton, Victoria.

From engineering the first Silent
Rangehood system in Australia, to being
available from more than 900 stores
nationwide today - our goal has always
been to bring Australian families closer
together, by helping them reclaim the
kitchen as the hub of their home.

Along the way, we've partnered leading local players across industries to deliver

world-class products and customer service – supporting local people and jobs in manufacturing, logistics, professional trades and retail as we do so.

Schweigen is proudly Australian owned and operated. We keep all our profits here, to help our country prosper now and into the future.

So, the next time you buy Australia's number one selling Silent Rangehood, or pick from our range of award-winning appliances, rest assured that you're buying Australian, and that you're buying from the best of us.









German engineered and manufactured.

Innovation and detail come together to create an exquisite, unique collection of rangehoods, where silence, functionality and quality are our insignia.

Schweigen sets new standards in ventilation by moving air intelligently and silently. We strive for the perfect harmony between technology, aerodynamics, and electronics. As a result of this, we produce the most powerful, efficient and silent rangehood products on the market.

Our German engineered and manufactured Isodrive® motor has been designed from the ground up, using the upmost precision. With aerodynamics and aeroacoustics being our main priority, we have collaborated with world

leaders to achieve the results we want.
Continual investment in new simulation
tools and testing facilities ensures
every component of our product is
designed to take on the harsh Australian
environment.

We pride ourselves on selling products that are exceptional in durability and quality. Constructed with high quality stainless steel and using the latest in manufacturing technology, Schweigen silent rangehoods are built to last and will look amazing in years to come.







*Schweigen products are distinguished by outstanding design and superior quality. In order to emphasise this claim, we provide a three-year guarantee for our rangehoods and a ten-year warranty for the Isodrive® motor.



We're leaving a positive trace #climatepostive

Schweigen supports Climate Positive projects

// Sistema Biogas Kenya - energy production through the installation of biogas plants that treat animal waste into renewable biogas and fertilizer

A Climate Positive Organisation.

Schweigen invests in the future of the planet by carbon offsetting – supporting sustainable projects that reduce and remove emissions from the environment.

As a Climate Positive Organisation, we strive to minimise any negative environmental impact of doing business, and offset unavoidable emissions by supporting worthy climate and sustainable developments worldwide.

Schweigen is pleased to partner with Climate Tech company trace to become Climate Positive. trace is an Australianborn Climate Tech company on a mission to remove the barriers to climate action for individuals and businesses, through its accessible software platform and community.

Projects suported include; revegetation, conservation and management of unique biodiversity areas in Australia; renewable energy projects in Kenya, India, New Caledonia and Taiwan; clean water support in Rwanda; peatland conservation education projects with communities in Indonesia; supply of efficient cookstoves in Nepal.

Our Schweigen Care Program reinforces our commitment to take climate action - to minimise harm to our planet and to leave nothing but a positive trace.



l Rimba Raya Peatlands Conservation Project - Indoneisa



The Schweigen silent story.

The Schweigen silent rangehood solution is revolutionary, starting with a German fan and motor assembly, and acknowledged as the most quiet, efficient, and powerful domestic extraction unit available.

Few of our competitors can deliver a silent solution because they don't offer the same system.

We call it Isodrive®.

Schweigen's patented Isodrive® solution takes the fan and motor out of the rangehood and mounts them outside the home on the roof, wall or eave. We also incorporate an 's' bend into the flexiducting, which creates an easy solution for all installation requirements, while reducing noise and vibrations.

The only resulting sound you may notice in your kitchen is the airflow being pulled through the filters and ducting. The noise that is generated outside is overwhelmed by the ambient environment.


We provide a motor 'housing' to protect the motor from weather elements. It is manufactured from the most highly durable ASA plastic or Colorbond® steel exclusive to Schweigen rangehoods.

Our filters are high quality too, and come with a Lifetime Warranty. We offer baffle and mesh filters that are easy to remove and safe to clean in the dishwasher.

Powered by





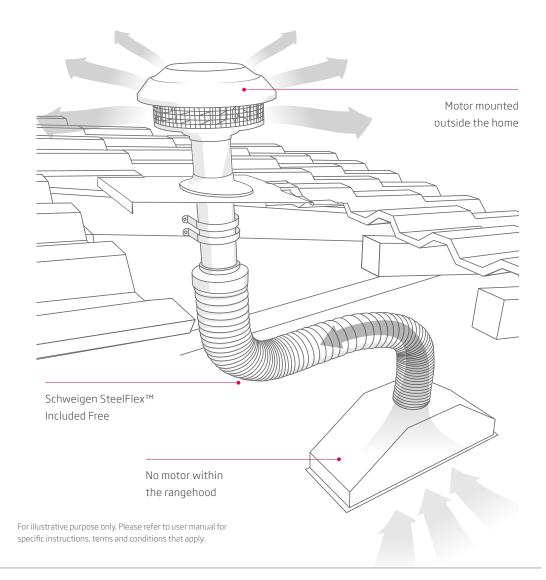











Powerful extraction.

The silent Isodrive® motor system is engineered using the most advanced German made EBM motor and fan. Each of the different Isodrive® motor housing has been developed to carefully consider the best airflow. Built with a centrifugal fan, the Isodrive® motor system is designed to pull, rather than push the air through the rangehood. As a result, there is less airflow resistance, which enables the Isodrive® system to run more efficiently than a standard rangehood motor.

The patented motor system is available in five different extraction sizes to cater for all cooking needs.


The Isodrive® ST.900 has been designed for moderate cooking including the grilling of steaks, shallow frying and casserole baking. Designed for heavy cooking such as wok frying, heavy steaming and grilling, the Isodrive® SP.1600 is the perfect match for any Asian or Indian dish, as well as induction cooking.

We have extended our silent Isodrive® range to cater for home owners where installing a motor and ducting outside the home is not possible.

The Endline Isodrive® motor is perfect for double storey buildings or apartments as it can be installed into an external wall.

For our ceiling cassette and alfresco range we offer the Isodrive® SP2.3000 and Isodrive® SE.3200 motor combinations.

Built with superior quality and precision, the Schweigen silent Isodrive® quarantees performance and reliability for years to come, that is why all Isodrive® motors come with a 10 year peace of mind warranty.

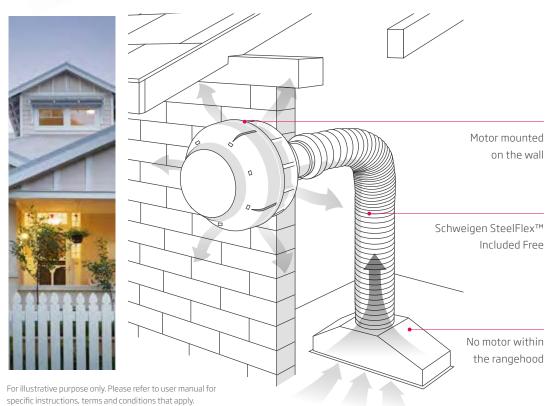





3 times more energy efficient.

The terms 'energy efficient' and 'suction', are often confused. Greater efficiency is often mistaken for greater suction. This is both incorrect and misleading.

Greater suction can be easily achieved by applying more power. However, an increase in power leads to the consumption of more energy, making it less energy efficient.

Ideally, an appliance that requires the least amount of energy to complete the task at hand, is the most efficient. This is where Schweigen excels. The Isodrive® motor is not only the quietest extraction

system, it is also the most energy efficient as the air is pulled through the system rather than pushed.

As a result of the Isodrive® design, the Schweigen silent rangehood systems use less energy to achieve the same task as traditional rangehoods. Traditional rangehoods use roughly 190 watts or more, whereas the Isodrive® ST.900 motor system paired with LED lighting runs on a mere 57 watts.

That's 3 times more efficient than a traditional rangehood!



Schweigen Silent Rangehood with **Isodrive**° is 3 Times more energy efficient

	100W >	200W >	300W >	400W	· >	500W 🔪		600W
MORE EFFICIENT	\$1/ST/BR500	SE		Typical	Typical		LESS EFFICIENT	Other Interna
	Schweigen Single Motored Rangehood	Schweigen Single Motored Rangehood		Slide-out Rangehood	Canopy Rangehood			Motored Rangehoods
	57W	137W		330W	400W			600W









Schweigen SteelFlex[™] High Performance Safety Ducting.

Schweigen SteelFlex™ is an ultra-strong and flexible high-performance safety ducting made of Shirikon Firemesh® – a tri-layer tear-resistant UV-treated sleeve. Both are developed by Schweigen - the Silent Rangehood specialists, for quiet and efficient high-volume transfers of temperature-sensitive air.


Engineered to enhance the health and safety of your home, Schweigen SteelFlex™ is antimicrobial treated, thermally insulated and acoustically dampened. It is fireproof, pest and crush proof with a treated surface that prevents the build-up of grease and bacteria.

All Schweigen SteelFlex™ products are independently tested to offer unbeatable strength and safety for the most demanding industrial and commercial HVAC applications.


Guaranteed for life*, Schweigen
SteelFlex™ works best and comes free
with all Schweigen silent rangehoods
powered by the German-made Isodrive®
Motor System - for silent yet powerful air
extraction where you cook.

Engineered to enhance the health and safety of your family, the benefits of SteelFlex™ include:

- Treated with an advanced antimicrobial coating to resist pollutant build-up and the spread of surface bacteria
- Comes right-sized and ready-cut for quicker and safer installs by specialists and DIY enthusiasts alike
- Fire, rodent and crush-proof
- Certified, rigorous testing by an independent product testing facility.

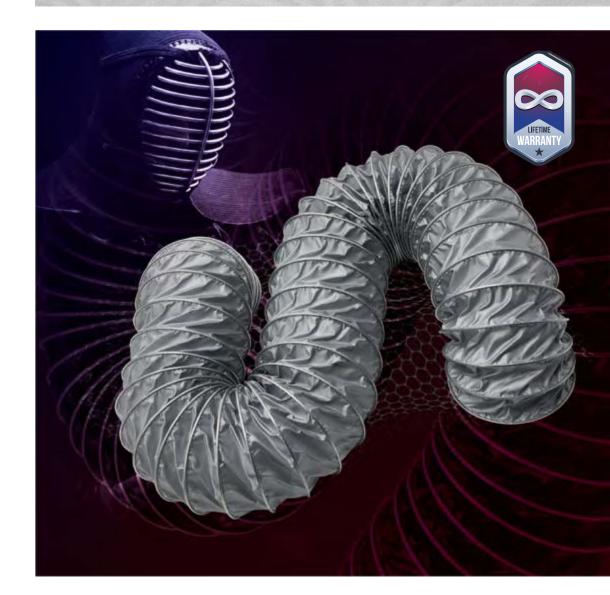




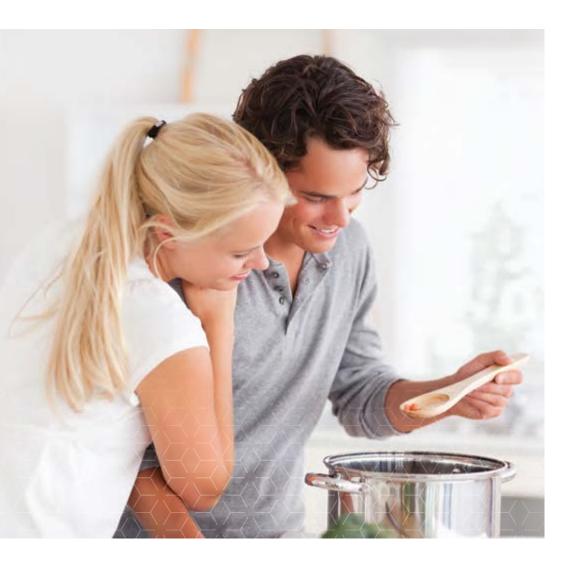



Perimeter Aspiration.

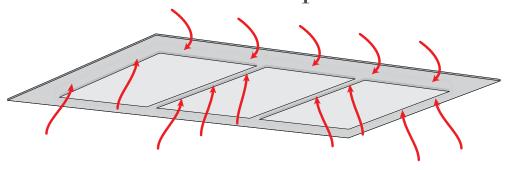

The Perimeter Aspiration system (P.A.) uses an additional panel of glass or stainless steel to create a 'venturi' effect, which helps capture smoke, steam, grease and oil more effectively.

Airborne particles from the cooktop are targeted to the outer perimeter of the canopy where intake is restricted, and it is this narrow space which causes an increase in airflow velocity. The more quickly the airborne particles are captured, the less 'leakage' there is into the surrounding cooking zone.

This technology is particularly effective because it relies upon the high extraction power of the Schweigen silent Isodrive® motors.

Perimeter Aspiration system panels are easy to clean and open in order to access and remove the filters underneath, for safe cleaning in the dishwasher.



Perimeter Aspiration creates a 'venturi' effect drawing airflow to the canopy edges.





Balanced Aspiration.

The Balanced Aspiration system (B.A.) is a breakthrough in domestic rangehood appliance technology and features exclusively on models in the Schweigen collection.


The system consists of an outer filter which captures grease and oil from airborne particles, and an inner plate.

The inner plate is perforated with strategically shaped and spaced holes which help to spread the intake of air more evenly across the filtration zone before it is extracted through the grease filter.

The plate also acts as a barrier, stopping grease from accessing inner mechanical and electrical components, making it more hygienic and safe over long term use.

The Balanced Aspiration system is particularly effective because it relies upon the high extraction power of the Schweigen silent Isodrive® motor.

The outer filters are easily removed for cleaning and are dishwasher safe. Once removed, the inner plate can then be wiped clean.

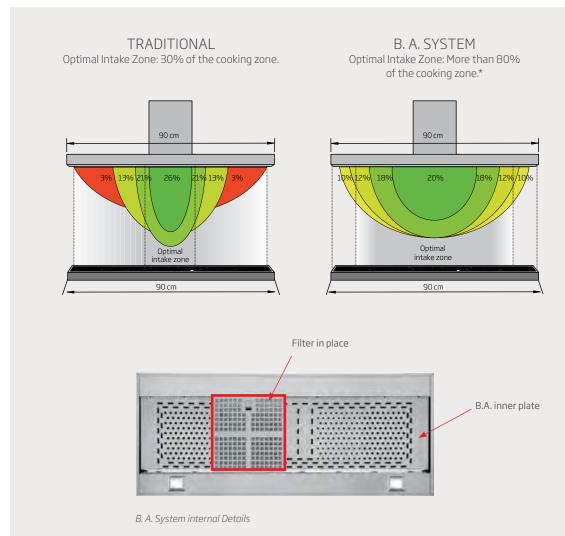



Note: Approximate data, results of the average behaviour of all the products in the range. *Only available on selected models.



The 3 steps to choosing a Schweigen silent rangehood.

If you have a smaller kitchen or prefer a sleek minimalist style, then you could choose one of our elegant undermount designs. If you have the space, we recommend a wallmount design. A kitchen island or peninsula bench-top layout is complimented best with an island hood or a ceiling cassette design. These can also be built into a bulkhead to create a bold statement.

The width of the rangehood needs to adequately accommodate the cooktop underneath it in order to optimise airflow extraction.

Choose a motor power option that will accommodate your cooking style:
Moderate and Heavy, across the different canopy types.

1 Choose your rangehood **style**

2 Choose your cooking **type**

Free ducting + peace-of-mind warranties



Ceiling Cassette. UM422G-12S // kitchen design. Architects EAT // photography. Derek Swalwell Photography



Choose a rangehood **style** that suits your kitchen design













Choose your cooking **type** to match with the perfect Isodrive® motor





Moderate cooking

Boiling pasta, steaming vegetables, grilling chicken



3333

Heavy cooking

Grilling steak, casseroles, shallow frying



333333

Extreme cooking

Asian stir-fry, Indian curry, deep frying




3 Enjoy **free ducting** and peace-of-mind warranties







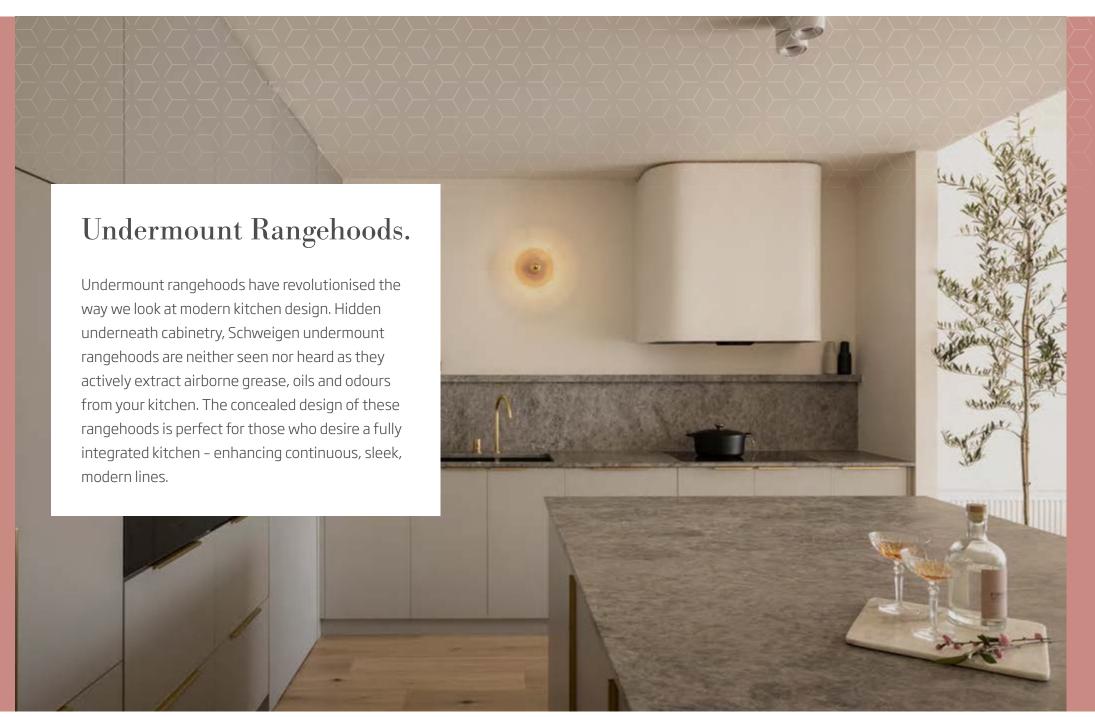

UNDERMOUNT

$Catalonia \textit{ // GA-600S, GA-900S, GA-1200S // 60cm, 90cm \& 120cm \textit{ // SILENT undermount rangehood with automatic power-off} \textit{ and } \textit{ // GA-600S, GA-900S, GA-1200S // 60cm, 90cm \& 120cm // SILENT undermount rangehood with automatic power-off} \textit{ // GA-600S, GA-900S, GA-1200S // 60cm, 90cm & 120cm // SILENT undermount rangehood with automatic power-off} \textit{ // GA-600S, GA-900S, GA-1200S // 60cm, 90cm & 120cm // SILENT undermount rangehood with automatic power-off} \textit{ // GA-600S, GA-900S, GA-1200S // 60cm, 90cm & 120cm // SILENT undermount rangehood with automatic power-off} \textit{ // GA-600S, GA-900S, GA-1200S // 60cm, 90cm & 120cm // SILENT undermount rangehood with automatic power-off} \textit{ // GA-600S, GA-900S, GA-1200S // 60cm, 90cm & 120cm // SILENT undermount rangehood with automatic power-off} \textit{ // GA-600S, GA-900S, GA-90S, G$












// GA-1200S

Undermount rangehoods have revolutionised the way we look at modern kitchen design. Hidden underneath the cabinetry, they are neither seen nor heard as they actively target and remove airborne grease and odours from your kitchen.

The Catalonia is perfect for those who desire a fully integrated kitchen, rather than the more traditional canopy option.



Soft touch control panel

DESCRIPTION

- stainless steel finish
- easy-remove, dishwasher safe stainless steel filter
- automatic power-off
- LED illumination
- silent Isodrive® motor
- powerful, silent operation
- 4 extraction fan speeds with electronic control
- · filter clean indicator
- 5 Year Warranty

TECHNICAL DATA

- GA-600S dimensions: (W x D) 595 x 295mm
- GA-900S dimensions: (W x D) 895 x 295mm
- GA-1200S dimensions: (W x D) 1195 x 295mm
- Stainless steel filters
- 2 x LED lights

ISODRIVE POWER OPTIONS

• ST.900

- single external motor
- 900 m³/h airflow
- 200mm SteelFlex™ ducting (4m)
- install roof/wall

SP.1600

- single external motor
- 1600 m³/h airflow
- 200mm SteelFlex[™] ducting (6m)
- install roof/wall

• SE.3200

- single external motor
- 3200 m³/h airflow
- 250mm SteelFlex™ ducting (4m)
- install roof/wall
- 10 Year Motor Warranty







UNDERMOUN

Glass // KLS-9GLASSBLKS, KLS-9GLASS // 90cm // SILENT undermount rangehood with automatic power-off



4 speed touch sensitive control panel




// KLS-9GLASSBLKS

This rangehood design offers an easy-to-clean surface with the power of Perimeter Aspiration. Available in a sleek opaque black or white glass finish, this rangehood design will integrate seamlessly with your kitchen.



// KLS-9GLASS





DESCRIPTION

- black or white glass
- easy-remove, dishwasher safe aluminium filters
- automatic power-off
- Perimeter Aspiration
- silent Isodrive® motor
- powerful, silent operation
- strip LED illumination
- 4 extraction fan speeds with touch sensitive control
- filter clean indicator
- 5 Year Warranty

TECHNICAL DATA

- product dimensions: (W x D) 895 x 295mm
- 1 x aluminium filter
- 1 x strip LED light

ISODRIVE POWER OPTIONS

- ST.900
- single external motor
- 900 m³/h airflow
- 200mm SteelFlex™ ducting (4m)
- install roof/wall

· SP.1600

- single external motor
- 1600 m³/h airflow
- 200mm SteelFlex™ ducting (6m)
- install roof/wall
- 10 Year Motor Warranty











UNDERMOUNT

UM1170-6S, UM1170-9S // 60cm & 90cm // **SILENT undermount rangehood**









// UM1170-6S (60cm)



Perfectly designed for discreet mounting inside overhead cabinets, the popular UM1170 fits perfectly into your kitchen cupboards and is ideal for when space is limited, or where the rangehood needs to be out of sight.

Convenient stainless steel push button controls operate the 5 speed settings, LED lighting and 15 minute delay timer with auto shut-off, while dishwasher-safe mesh filters offer easy maintenance.



DESCRIPTION

- stainless steel finish
- silent Isodrive® motor system
- soft-touch controls, digital display
- 5 x speed levels
- 15 minute delay timer with auto shut-off
- 2 x LED lights
- stainless steel, dishwasher safe filters
- 3 Year Warranty on Canopy

TECHNICAL DATA

UM1170-6S

- dimensions: (W x D) 598 x 295 mm
- 2 x mesh filters (baffle optional)

UM1170-9S

- dimensions: (W x D) 898 x 295 mm
- 3 x mesh filters (baffle optional)

MOTOR OPTIONS

• ST.900

- single external motor
- 900 m³/h airflow
- 200mm SteelFlex™ ducting (4m)
- install roof/wall

• SP.1600

- single external motor
- 1600 m³/h airflow
- 200mm SteelFlex[™] ducting (6m)
- install roof/wall

SE.3200

- single external motor
- 3200 m³/h airflow
- 250mm SteelFlex[™] ducting (4m)
- install roof/wall

***Note:** The SE.3200 is used only by the UM1170-9S.









UM1170-6BS, UM1170-9BS, UM1170-12BS // 60cm & 90cm // **SILENT undermount rangehood**





// UM1170-12BS 120m)



// UM1170-6BS (60cm)

Perfect for cooking up a storm. The popular UM1170-9BS now comes in stylish stain-resistant matte black to add sophistication and drama to modern kitchens. Designed for discreet mounting into 300mm deep cabinetry, it is ideal for kitchens where space is limited, or where the rangehood needs to be out of sight.

// UM1170-9BS (90cm)

Soft-touch controls operate the 5 speed settings and LED lighting, while dishwasher-safe mesh filters offer easy maintenance.

DESCRIPTION

- black powder coated stainless steel finish
- silent Isodrive® motor system
- soft-touch controls, digital display
- 5 x speed levels
- 15 minute delay timer with auto shut-off
- 2 x LED lights
- stainless steel, dishwasher safe filters
- 3 Year Warranty on Canopy

MOTOR OPTIONS

- ST.900
- single external motor
- 900 m³/h airflow
- 200mm SteelFlex™ ducting (4m)
- install roof/wall

SP.1600

- single external motor
- 1600 m³/h airflow
- 200mm SteelFlex™ ducting (6m)
- install roof/wall

TECHNICAL DATA

UM1170-6BS

- dimensions: (W x D) 598 x 295 mm
- 2 x mesh filters

UM1170-9BS

- dimensions: (W x D) 898 x 295 mm
- 3 x mesh filters

UM1170-12BS

- dimensions: (W x D) 1198 x 295 mm
- 4 x mesh filters

• SE.3200

- single external motor
- 3200 m³/h airflow
- 250mm SteelFlex™ ducting (4m)
- install roof/wall

*Note: The SE.3200 is used only by the UM1170-9BS and UM1170-12BS








UNDERMOUNT


UM-PA9S // 90cm // SILENT undermount rangehood







//4 speed soft touch control panel



// Perimeter Aspiration Technology

This sophisticated undermount provides powerful performance, while being discreetly mounted inside cabinetry. The UM-PA9S features an innovative ambient LED lighting system which allows for safe, clear vision while cooking.

One of the advantages of the UM-PA9S is the additional power of Perimeter Aspiration which targets air extraction towards the perimeter of the rangehood creating a smaller and more intense extraction area.



DESCRIPTION

- stainless steel finish
- silent Isodrive® motor system
- soft touch controls
- 4 x speed levels
- 15 minute delay timer with auto shut-off
- strip LED illumination
- aluminium, dishwasher safe filter
- 3 Year Warranty on Canopy

TECHNICAL DATA

UM-PA9S

- dimensions: (W x D) 895 x 295 mm
- 1 x mesh filter

MOTOR OPTIONS

- ST.900
- single external motor
- 900 m³/h airflow
- 200mm SteelFlex™ ducting (4m)
- install roof/wall

• SP.1600

- single external motor
- 1600 m³/h airflow
- 200mm SteelFlex[™] ducting (6m)
- install roof/wall



UM-9S, UM-12UMS // 90cm & 120cm // SILENT undermount rangehood







// UM-12UMS (120cm)

With an entirely concealed design, the UM-9S and UM-12UMS stainless steel undermount rangehoods excite those who prefer a fully integrated kitchen, for a continuous flow throughout the space. Powerful silent extraction is delivered with the externally mounted, German engineered Isodrive® motor,

// UM-9S (90cm)

producing efficient extraction of steam, smoke and odours, leaving kitchen air fresher. Convenient stainless steel push button controls operate the 5 speed settings, LED lighting and 15 minute delay timer with auto shut-off, whilst dishwasher-safe baffles offer easy maintenance.

DESCRIPTION

- stainless steel finish
- silent Isodrive® motor system
- soft-touch controls, digital display
- 5 x speed levels
- 15 minute delay timer with auto shut-off
- 2 x LED lights
- stainless steel, dishwasher safe baffles
- 3 Year Warranty on Canopy

TECHNICAL DATA

UM-9S

- dimensions: (W x D) 864 x 295 mm
- 2 x baffles

UM-12UMS*

- dimensions: (W x D) 1200 x 295 mm
- 4 x baffles

MOTOR OPTIONS

- ST.900
- single external motor
- 900 m³/h airflow
- 200mm SteelFlex™ ducting (4m)
- install roof/wall

SP.1600

- single external motor
- 1600 m³/h airflow
- 200mm SteelFlex[™] ducting (6m)
- install roof/wall

SE.3200

- single external motor
- 3200 m³/h airflow
- 250mm SteelFlex™ ducting (4m)
- install roof/wall

*Note: The SE.3200 is used only by the UM-12UMS.



UM1390-6S, UM1390-9S, UM1390-12S // 60cm, 90cm & 120cm // **SILENT undermount rangehood** for deeper cabinets









// UM1390-6S (60cm)



// UM1390-12S (120cm)

Simply discreet and concealed, this most recent addition to Schweigen's classic range is specially designed for the ultimate extraction of unwanted odours and cooking vapours.

The UM1390 fits deeper into cabinetry than most other undermount rangehoods. Due to its larger extraction zone, this model is simply exceptional in the removal of fats, oils and grease, leaving your kitchen fresher for longer.

DESCRIPTION

- stainless steel finish
- silent Isodrive® motor system
- · soft-touch controls, digital display
- 5 x speed levels
- 15 minute delay timer with auto shut-off
- 2 x LED lights
- · stainless steel, dishwasher safe filters
- 3 Year Warranty on Canopy

TECHNICAL DATA

UM1390-6S

- dimensions: (W x D) 598 x 390mm
- 2 x mesh filters

UM1390-9S

- dimensions: (W x D) 898 x 390 mm
- 3 x mesh filters

UM1390-12S*

- dimensions: (W x D) 1198 x 390 mm
- 4 x mesh filters

MOTOR OPTIONS

ST.900

- single external motor
- 900 m³/h airflow
- 200mm SteelFlex™ ducting (4m)
- install roof/wall

SP.1600


- single external motor
- 1600 m³/h airflow
- 200mm SteelFlex™ ducting (6m)
- install roof/wall

SE.3200

- single external motor
- 3200 m³/h airflow
- 250mm SteelFlex™ ducting (4m)
- install roof/wall

*Note: The SE.3200 is used only by the UM-1390-12S.



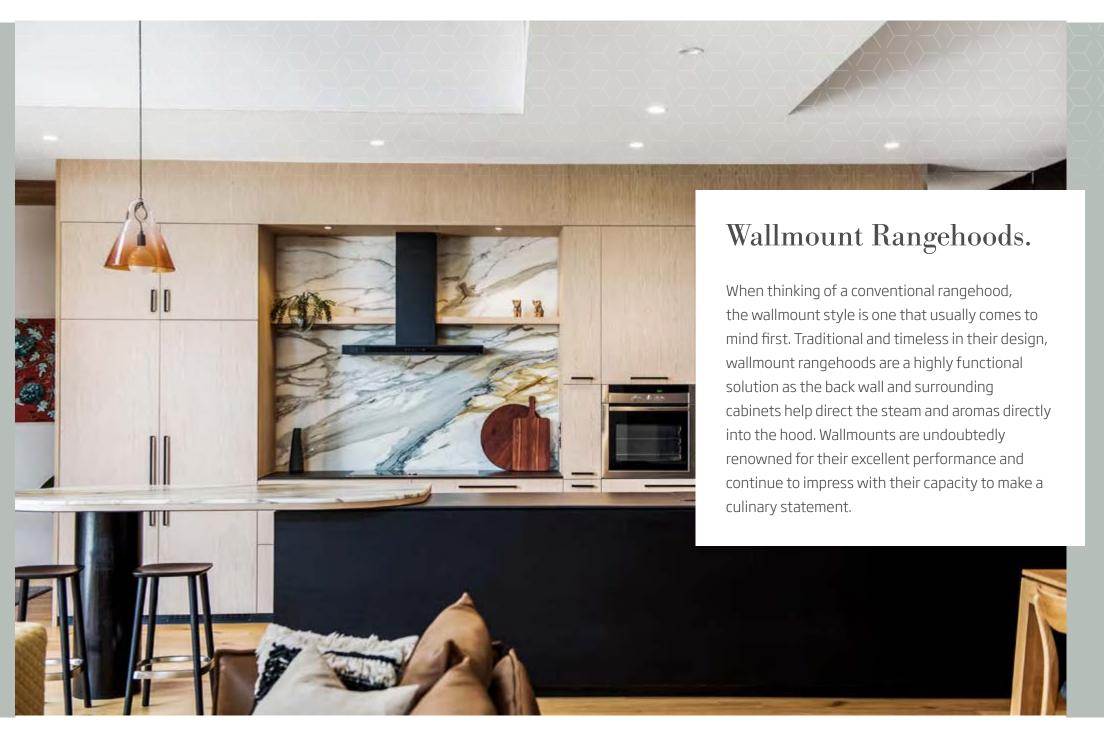

Line // WM-LIN9S // 90cm // SILENT Wallmount Rangehood with automatic power-off







DESCRIPTION

- stainless steel finish
- · easy-remove, dishwasher safe stainless steel filters
- automatic power-off
- Balanced Aspiration
- silent Isodrive® motor
- powerful, silent operation
- LED illumination
- 4 extraction fan speeds with electronic control
- filter clean indicator
- 5 Year Warranty

TECHNICAL DATA

- 3 x stainless steel filters
- 2 x LED lights

ISODRIVE POWER OPTIONS

- ST.900
- single external motor
- 900 m³/h airflow
- 200mm SteelFlex™ ducting (4m)
- install roof/wall

· SP.1600

- single external motor
- 1600 m³/h airflow
- 200mm SteelFlex™ ducting (6m)
- install roof/wall
- 10 Year Motor Warranty

- product dimensions: (W x D) 900 x 520mm











With its low profile and unobtrusive style, the LINE rangehood silently whisks away airborne particles using the advanced Balanced Aspiration airflow system.



Alba // KLS-ALBW9S, KLS-ALBB9S // 90cm // SILENT Wallmount Rangehood with automatic power-off





// KLS-ALBB9S

ALBA makes an ultra-modern statement in steel and glass. With its advanced Balanced Aspiration airflow system it silently and efficiently removes steam, grease and oil airborne particles.











4 speed touch sensitive control panel

DESCRIPTION

- stainless steel & glass
- easy-remove, dishwasher safe stainless steel filters
- automatic power-off
- Balanced Aspiration
- silent Isodrive® motor
- powerful, silent operation
- LED illumination
- 4 extraction fan speeds with touch sensitive control
- · filter clean indicator
- 5 Year Warranty

TECHNICAL DATA

- product dimensions: (W x D) 900 x 525 mm
- 3 x stainless steel filters
- 1 x fluorescent light
- 2 x LED lights

ISODRIVE POWER OPTIONS

- ST.900
- single external motor
- 900 m³/h airflow
- 200mm SteelFlex™ ducting (4m)
- install roof/wall

· SP.1600

- single external motor
- 1600 m³/h airflow
- 200mm SteelFlex™ ducting (6m)
- install roof/wall
- 10 Year Motor Warranty











DS3131-R2S // 90cm // SILENT Wallmount Rangehood with Neon LED







DESCRIPTION

- stainless steel finish
- blue light display (DS3131S)
- red light display (KLS-3131RS)
- silent Isodrive® motor system
- · soft-touch controls, digital display
- 5 x speed levels
- 15 minute delay timer with auto shut-off
- 2 x LED lights
- stainless steel, dishwasher safe filters
- 3 Year Warranty on canopy

MOTOR OPTIONS

- ST.900
- single external motor
- 900 m³/h airflow
- 200mm SteelFlex™ ducting (4m)
- install roof/wall

• SP.1600

- single external motor
- 1600 m³/h airflow
- 200mm SteelFlex™ ducting (6m)
- install roof/wall

DS3131-R2S

- dimensions: (W x D)
- 3 x mesh filters

TECHNICAL DATA

898 x 500 mm





The DS3131-R2S delivers high performance and style with silent and powerful extraction capability. The striking blue illumination strip creates a beautiful visual statement in any kitchen, forging a perfect union of form and function.

// DS3131-R2S - Blue LED Strip

Other convenient features include soft-touch controls with 5 speed levels and a 10 minute auto shut-off timer, so you can leave the kitchen and the rangehood will switch off after clearing the air.

DS3326-9S, DS3326B-9S // 90cm // SILENT Wallmount Rangehood with remote control



// DS3326B-9S



// DS3326B-9S

This ultra-modern and stylish wall canopy with stainless steel and black tempered glass fascia will stand out from the crowd. On trend with contemporary modern kitchen design, the DS3326-9S boasts silent and powerful extraction capability.

// DS3326-9S

This state of the art rangehood features Perimeter Aspiration Technology which targets air extraction towards the perimeter of the rangehood, creating a smaller and more intense extraction area. Other convenient features include touch sensitive controls with five speed levels and a 15 minute auto shut-off timer, so you can leave the kitchen and the rangehood will switch off after clearing the air.



DESCRIPTION

- stainless steel finish
- silent Isodrive® motor system
- · touch sensitive control, digital display
- · remote control
- Perimeter Aspiration
- 5 x speed levels
- · 15 minute delay timer with auto shut-off
- 4 x LED lights
- 1 x aluminium, dishwasher safe mesh filter
- 3 Year Warranty on canopy

MOTOR OPTIONS

- ST.900
- single external motor
- 900 m³/h airflow
- 200mm SteelFlex™ ducting (4m)
- install roof/wall

• SP.1600

- single external motor
- 1600 m³/h airflow
- 200mm SteelFlex™ ducting (6m)
- install roof/wall

TECHNICAL DATA

DS3326B-9S

- black powder coated S/S, black glass fascia
- dimensions: (W x D) 898 x 500 mm

DS3326-9S


- stainless steel, black glass fascia
- dimensions: (W x D) 898 x 500 mm



WM-EX90S // 90cm // SILENT Wallmount Rangehood







// Control the ventilation using the extraction shutters



// Perimeter Aspiration Technology

The sleek, grand WM-EX90S combines the power of the iconic German engineered silent Isodrive® motor, the style of its European innovative design, and the intelligence of Perimeter Aspiration.

// WM-EX90S

With the canopy's modern, square-edged European influence, this wallmount feature creates a contemporary statement in any kitchen. The glass extraction shutters are the stand-out element with smoke and steam directed and contained within the canopy area, allowing more control and optimised ventilation.



DESCRIPTION

- stainless steel canopy with **ST.900** drop-down glass panels
- Perimeter Aspiration
- Silent Isodrive® motor system
- soft touch controls
- 4 x speed levels
- 15 minute delay timer with auto shut-off
- 3 x LED lights
- aluminium, dishwasher safe mesh filters
- 3 Year Warranty on Canopy

MOTOR OPTIONS

- single external motor
- 900 m³/h airflow
- 200mm SteelFlex™ ducting (4m)
- install roof/wall

SP.1600

- single external motor
- 1600 m³/h airflow
- 200mm SteelFlex™ ducting (6m)
- install roof/wall

TECHNICAL DATA

WM-EX90S

- dimensions: (W x D) 900 x 520 mm
- 2 x mesh filters
- free ducting



DS3170S, DS3170-12S // 90cm & 120cm // **SILENT Wallmount Rangehood**





// DS3170-12S



//DS3170S with baffles

Geometric design sits at the forefront of modern kitchen trends, and the DS3170S excels in this domain. This wallmount rangehood is perfect for those who seek a contemporary, culinary feature, whilst enjoying the pleasures of family conversations without interruption.

Efficient LED down lights illuminate the cooking area, whilst commercial grade filters thoroughly trap oil and grease. The DS3170S features soft-touch digital controls that are convenient to use, with 15 minute delay automatic shut-off to make entertaining effortless.



DESCRIPTION

- stainless steel finish
- silent Isodrive® motor system
- soft-touch controls, digital display
- 5 x speed levels
- 15 minute delay timer with auto shut-off
- 2 or 3 LED lights
- · stainless steel, dishwasher safe mesh filters
- 3 Year Warranty on Canopy

MOTOR OPTIONS

- ST.900
- single external motor
- 900 m³/h airflow
- 200mm SteelFlex™ ducting (4m)
- install roof/wall

• SP.1600

- single external motor
- 1600 m³/h airflow
- 200mm SteelFlex™
- install roof/wall

TECHNICAL DATA

DS3170S

- dimensions: (W x D) 898 x 500 mm
- 3 x mesh filters

DS3170-12S*

- dimensions: (W x D) 1200 x 500 mm
- 4 x mesh filters

- ducting (6m)

*Note: The SE.3200 is used only by the DS-3170-12S.





WM2190-6S, WM2190S // 60cm & 90cm // SILENT Wallmount Rangehood





// WM2190S (90cm)

The WM2190 boasts an influence of Italian design for professional cooking with the utmost element of style. The pyramid shaped angles and stainless-steel finish makes a striking visual statement in any kitchen. Fan speed is controlled by the stainless steel selector switches on the front of the

canopy. Designed to minimise the edges where grease and oil can lodge, Schweigen's high-quality filters are easy to remove and dishwasher safe, coming with a lifetime warranty.



DESCRIPTION

- stainless steel finish
- silent Isodrive® motor system
- soft-touch controls, digital display
- 5 x speed levels
- 15 minute delay timer with auto shut-off
- 2 x LED lights
- stainless steel, dishwasher safe mesh filters
- 10 Year Warranty on Isodrive® motor
- 3 Year Warranty on canopy

MOTOR OPTIONS

- ST.900
- single external motor
- 900 m³/h airflow
- 200mm SteelFlex™ ducting (4m)
- install roof/wall

• SP.1600

- single external motor
- 1600 m³/h airflow
- 200mm SteelFlex™ ducting (6m)
- install roof/wall

TECHNICAL DATA

WM2190-6S


- dimensions: (W x D) 600 x 500 mm
- 2 x mesh filters

WM2190S

- dimensions: (W x D) 898 x 500 mm
- 3 x mesh filters





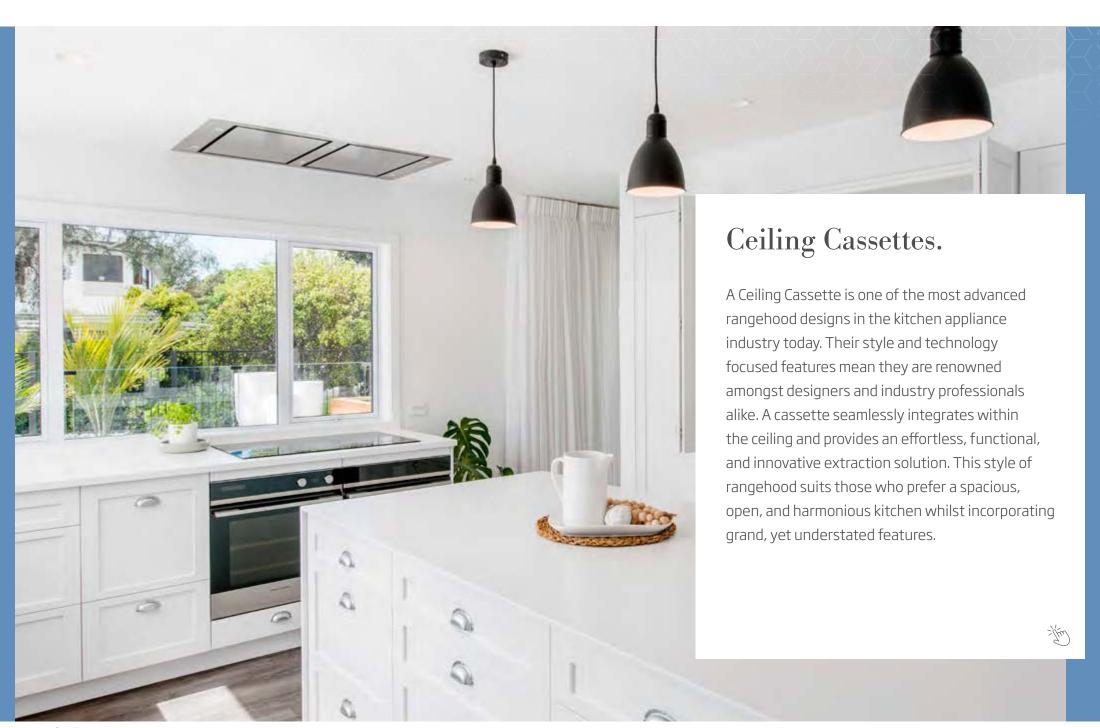


> CEILING CASSETTI

Surface // CC-SURF2S // 130cm // SILENT Ceiling Cassette with automatic power-off



// CC-SURF2S

SURFACE ceiling cassette is designed to be installed into a ceiling or bulkhead. With remote control convenience, a ceiling cassette is the sleek solution for over a kitchen island or peninsula benchtop.

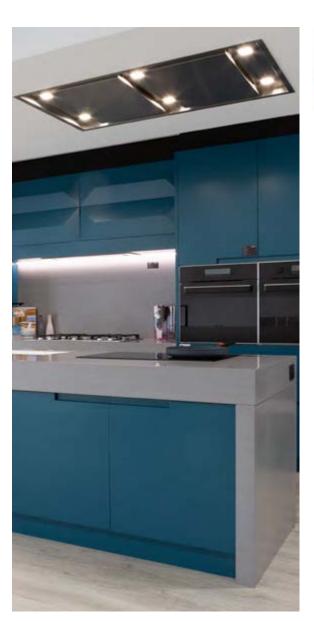





DESCRIPTION

- stainless steel finish
- Perimeter Aspiration
- easy-remove, dishwasher safe aluminium filters
- automatic power-off
- silent Isodrive® motor
- powerful, silent operation
- LED illumination
- 4 extraction fan speeds with remote control
- 5 Year Warranty

TECHNICAL DATA

- product dimensions:
 (W x D) 1300 x 800 mm
- 2 x aluminium filters
- 6 x LED lights

ISODRIVE POWER OPTIONS

- SP2.3000
- twin external motor
- 3000 m³/h airflow
- 200mm SteelFlex™ ducting (6m)
- install roof/wall

· SE.3200

- single external motor
- 3200 m³/h airflow
- 250mm SteelFlex[™] ducting (4m)
- install roof/wall
- 10 Year Motor Warranty











CEILING CASSETTES

$Inart\ 4M$ // <code>CC-INARTS</code> // <code>200cm</code> // <code>SILENT</code> <code>Ceiling</code> <code>Cassette</code> with automatic power-off



// CC-INARTS

The INART ceiling cassette fuses a glamorous stainless steel finish with generous dimensions, substantial power and intense draw that employs perimeter extraction. The INART handles any cooking style.









DESCRIPTION

- stainless steel
- Perimeter Aspiration
- · easy-remove, dishwasher safe aluminium filters
- automatic power-off
- silent Isodrive® motor
- powerful, silent operation
- LED illumination
- 4 extraction fan speeds with remote control
- 5 Year Warranty

TECHNICAL DATA

- product dimensions: (W x D) 2000 x 1000 mm
- 10 x LED lights
- 8 x aluminium filters

ISODRIVE POWER OPTIONS

- · SP2.3000
- twin external motor
- 3000 m³/h airflow
- 200mm SteelFlex™ ducting (6m)
- install roof/wall

• SE.3200

- single external motor
- 3200 m³/h airflow
- 250mm SteelFlex™ ducting (4m)
- install roof/wall
- 10 Year Motor Warranty












Paradigma // CC-PARA // SILENT Modular Ceiling Cassette with automatic power-off



The PARADIGMA offers sleek style and combines light and extraction in several modular configurations, making it a versatile solution for the kitchen.

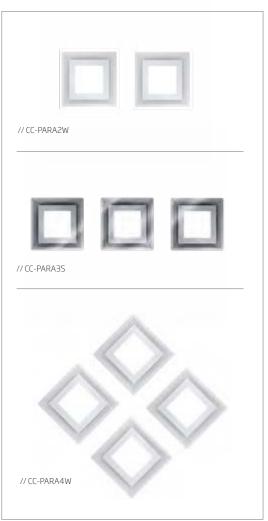

// Silent Moduar CC-PARA - Available in Stanless Steel and White

MODEL OPTIONS

CC-PARA4S: 1 control module, 3 subordinates (stainless steel) CC-PARA4W: 1 control module, 3 subordinates (white) CC-PARA3S: 1 control module, 2 subordinates (stainless steel)

CC-PARA3W: 1 control module, 2 subordinates (white)
CC-PARA2S: 1 control module, 1 subordinates (stainless steel)
CC-PARA2W: 1 control module, 1 subordinates (white)





Light panel drops down for easy access to filter

DESCRIPTION

- stainless steel or white
- Perimeter Aspiration
- easy-remove, dishwasher safe aluminium filters
- silent Isodrive® motor
- powerful, silent operation
- automatic power-off
- LED illumination
- 4 extraction fan speeds with remote control
- 5 Year Warranty

TECHNICAL DATA

- individual module dimensions: (W x D) 360 x 360 mm
- refer to Technical Information for number of aluminium filters included

ISODRIVE POWER OPTIONS

• SP.1600

- single external motor
- 1600 m³/h airflow
- 200mm SteelFlex™ ducting (6m)
- install roof/wall

SP2.3000

- twin external motor
- 3000 m³/h airflow
- 200mm SteelFlex[™] ducting (6m)
- install roof/wall

• SE.3200

- single external motor
- 3200 m³/h airflow
- 250mm SteelFlex™ ducting (4m)
- install roof/wall
- 10 Year Motor Warranty
- * Please confirm module configuration and motor power with your representative before ordering.









SCC1000-S // 100cm // SILENT Ceiling Cassette



The stylish and sophisticated SCC1000-S ceiling cassette

island or peninsula style kitchen benches.

maintains uninterrupted views across your kitchen by being

integrated seamlessly into the ceiling or bulkhead - perfect over







DESCRIPTION

- stainless steel
- Perimeter Aspiration
- ceiling/bulkhead cassette rangehood
- silent Isodrive® motor system
- 2 x aluminium, dishwasher safe filters
- free ducting
- simple wall switch operation (wall switch is not provided)
- 3 Year Warranty on canopy

MOTOR OPTIONS

- SP.1600
 - single external motor
 - 1600 m³/h airflow
 - 200mm SteelFlex™ ducting (6m)
 - install roof/wall

· SE.3200

- single external motor
- 3200 m³/h airflow
- 250mm SteelFlex™ ducting (4m)
- install roof/wall

TECHNICAL DATA


SCC1000-S

· stainless steel dimensions: (W x D) 1000 x 700 mm

An SE motor is recommended for ceilings above 2.4m in height (floor to ceiling).

finish in your kitchen, Schweigen recommends a water repellent paint type on walls and ceiling surrounding.

Featuring a sleek stainless steel finish and powerful silent extraction, this beautiful hood will complement any modern kitchen design. With the technology of Perimeter Aspiration, airflow is targeted towards the perimeter of the rangehood, creating a more intense extraction area.







SCC1200-S // 120cm // SILENT Ceiling Cassette





// Perimeter Aspiration Technology



// SCC1200-S

The stylish and sophisticated SCC1200-S ceiling cassette comes in an expansive 1200m length and 700mm depth for even more coverage over island or peninsula style kitchen benches. Perfect for maintaining uninterrupted views across the cooktop, this unit is available in stainless steel and accentuates any modern kitchen design.

With the technology of Perimeter Aspiration, airflow is targeted towards the perimeter of the rangehood, creating a more intense extraction area.



DESCRIPTION

- stainless steel finish
- silent Isodrive® motor system

- 3 Year Warranty on Canopy
- wall switch operation for lights and rangehood
- single speed

TECHNICAL DATA

SCC1200-S

- dimensions: (W x D) 1200 x 700 mm
- 2 x mesh filters

MOTOR OPTIONS

- single external motor

- 1600 m³/h airflow

- 200mm SteelFlex™ ducting (6m)

- twin external motor

- 3000 m³/h airflow

- 200mm SteelFlex™

ducting (6m)

- install roof/wall

- install roof/wall

SP2.3000

- SP.1600
- Perimeter Aspiration
- ceiling/bulkhead cassette rangehood
- aluminium, dishwasher safe filters
- · free ducting
- (wall switch is not provided)

• SE.3200

- single external motor
- 3200 m³/h airflow
- 250mm SteelFlex™ ducting (4m)
- install roof/wall

An SE motor is recommended for ceilings above 2.4m in height (floor to ceiling).

*Note: For a lasting quality finish in your kitchen, Schweigen recommends a water repellent paint type on walls and ceiling surrounding.



UM4220-12S, UM422G-12S // 120cm // SILENT Ceiling Cassette









// Remote control

// Perimeter Aspiration Technology



// UM4220-12S

// UM422G-12S

The UM422G-12S ceiling cassette is a combination of innovative silent technology and sleek, modern kitchen styling. The ceiling cassette is finished in stainless steel with black glass doors, making it both aesthetically pleasing and practical in its performance. Featuring 6 down-lights, your cooking area is completely illuminated while you cook for your guests.

One of the advantages of this ceiling cassette is the use of Perimeter Aspiration which targets air extraction towards the perimeter of the cassette creating a smaller and more intense extraction area. Remote control easily operates the ceiling cassette with the added benefit of a 15 minute automatic delay timer.

DESCRIPTION

- stainless steel finish
- ceiling/bulkhead cassette rangehood
- motor system
- Perimeter Aspiration
- remote control operation*
 SP2.3000
- 4 x speed levels
- 15 minute delay timer with auto shut-off
- 6 x LED down lights
- dishwasher safe filters

TECHNICAL DATA

UM4220-12S

 stainless steel dimensions: (W x D) 1200 x 700 mm

UM422G-12S

 stainless steel & black glass dimensions: (W x D) 1200 x 700 mm

MOTOR OPTIONS

- single external motor

- 1600 m³/h airflow

- 200mm SteelFlex™

- twin external motor

- 3000 m³/h airflow

- 200mm SteelFlex™

ducting (6m)

- install roof/wall

ducting (6m)

- install roof/wall

• SP.1600

- black glass or
- silent Isodrive®


- 2 x aluminium,
- 3 Year Warranty on canopy

• SE.3200

- single external motor
- 3200 m³/h airflow
- 250mm SteelFlex™ ducting (4m)
- install roof/wall

*Note: This model is controlled by remote control only. For a lasting quality finish in your kitchen, Schweigen recommends a water repellent paint type on walls and ceiling surrounding.




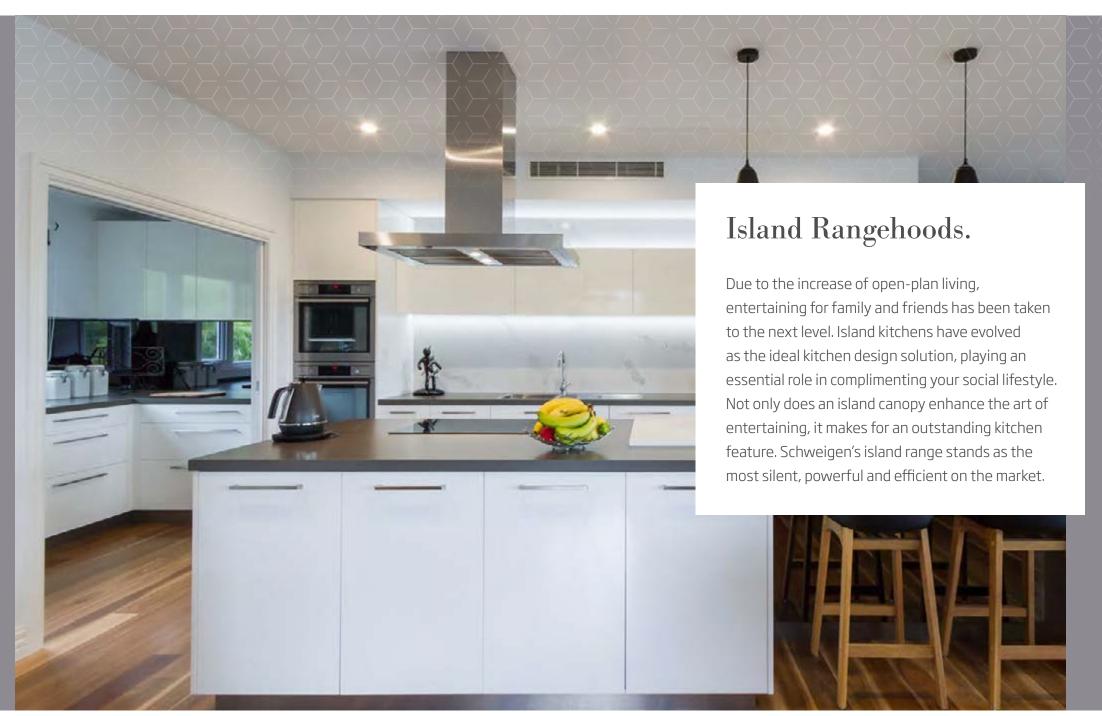

IS4110S // 90cm // SILENT Island Rangehood









// IS4110S

You couldn't ask for more with this strikingly designed rangehood. Adapting European design and German engineered silent technology, the IS4110S is less bulky than many of the traditional style rangehoods. As most canopies tend to make a room feel smaller, the IS4110S does the opposite and

is able to open up an entire kitchen space. The angular look of this rangehood has become extremely popular in modern kitchens, boasting features such as soft-touch eye level controls, stainless steel finish and a 15 minute delay timer with automatic shut-off.



DESCRIPTION

- stainless steel finish
- Silent Isodrive® motor system
- · soft-touch controls, digital display
- 5 x speed levels
- 15 minute delay timer with auto shut-off
- 2 x LED lights
- stainless steel, dishwasher safe mesh filters
- free ducting
- 3 Year Warranty on Canopy

MOTOR OPTIONS

- ST.900
- single external motor
- 900 m³/h airflow
- 200mm SteelFlex™ ducting (4m)
- install roof/wall

• SP.1600

- single external motor
- 1600 m³/h airflow
- 200mm SteelFlex™ ducting (6m)
- install roof/wall

TECHNICAL DATA

IS4110S

- 898 x 660 mm
- 4 x mesh filters








$Schweigen Focus \ \emph{// OPEN-PLAN LIVING} \ \emph{// Island bench-top}$



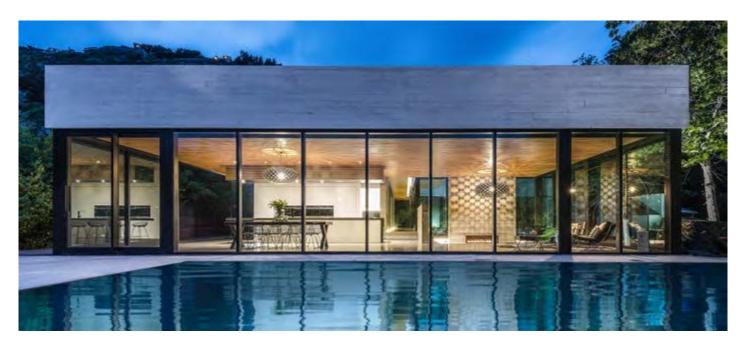






I Ceiling Cassette. UM4220-12S // builder. Freeman Ball Developments // design. Kirsty Davis Kitchen Design // joinery. Hagley Kitchens // photography. Anthony Turnham Snap Photography

In modern times, kitchen layout has been revolutionised by the way we engage with each other in the dining space. Cultural and societal views of the 1950's had fundamental influence on separating cooking and dining areas in the home. However, there started to become a demand for communal living, perhaps mostly related to the era of the baby-boomers. Architect and Interior Designer, Frank Lloyd Wright, discovered a reason and solution for our fascination and growing interest, therefore creating the Kitchen Island.

Technological influences allowed for shifts in design trends and more advanced kitchen appliances. The concept of cooking as a way of bringing friends and family together to entertain and socialise, led to open-plan living – integrating cooking with dining. The development of Interior Design has formed Island Kitchens into all different shapes, sizes and heights, reinventing the style of how we dine and utilise space.

With Island bench-tops being increasingly popular, there has been a demand for the correct ventilation to compliment this design. Island canopies and ceiling cassettes have proved to be the most popular, not only removing oils, grease and odours, but as a design statement to enhance any kitchen. Consequentially, the innovation of ceiling cassettes has become increasingly popular with kitchen designers travelling back to the original concept of creating space with open-plan living.

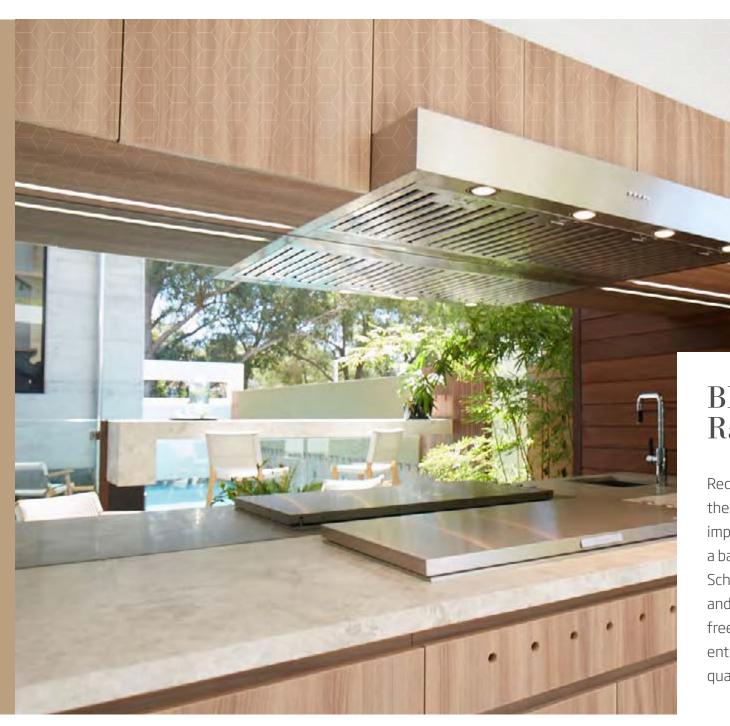


BBQ Alfresco Rangehoods.

Recently, Australian homes have revolutionised the outdoor living space, making it one of the most important areas for entertaining. Whether hosting a barbecue, or cooking for friends and family, Schweigen's BBQ Alfresco rangehoods enable you and your guests to experience a smoke and grease free environment. Australian families and barbecue enthusiasts are now able to enjoy restaurant quality, alfresco dining with functionality and style.

CLUM12S, CLUM15S // 120cm & 150cm // SILENT BBQ Alfresco Rangehood undermount



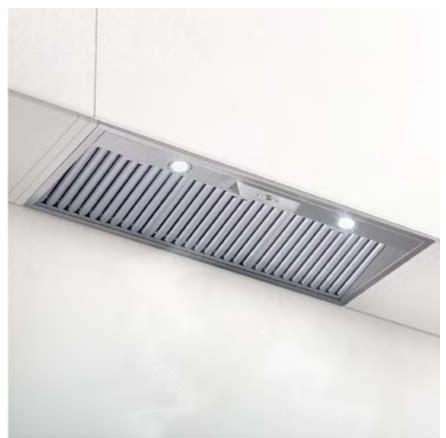





// CLUM15S

The CLUM12S or CLUM15S undermount rangehood boasts power, innovative design and durability. Constructed with high grade 304 stainless steel, this silent alfresco rangehood is designed for outdoor and under-cover patio use.

// CLUM12S

Its sleek design integrates seamlessly into overhead cabinetry and comes with sensitive touch buttons, remote control and

10-minute auto-shutoff function. There are 4 speed levels powered by the Isodrive® motor system for swift and silent extraction of heavy smoke and airborne grease from any Australian barbecue.



DESCRIPTION

- quality 304 grade stainless steel
- · silent Isodrive® motor
- 4 speed touch sensitive controls
- 10 minute auto shut off
- GU10 LED lights with a lifetime warranty
- dishwasher safe, commercial grade baffle filters
- 3 Year rangehood Warranty

TECHNICAL DATA

- CLUM12S dimensions: (W x D) 1200 x 500 mm, 3 x baffle filters, 2 x LED lights, free ducting
- CLUM15S dimensions: (W x D) 1500 x 500 mm, 4 x baffle filters, 4 x LED lights, free ducting

ISODRIVE POWER OPTIONS

- SP2.3000
- twin external motor
- 3000 m³/h airflow
- 200mm SteelFlex™ ducting (6m)
- install roof/wall

• SE.3200

- single external motor
- 3200 m³/h airflow
- 250mm SteelFlex[™] ducting (4m)
- install roof/wall
- 10 Year Motor Warranty







CL8812S, CL8815S // 120cm & 150cm // SILENT BBQ Alfresco Rangehood wallmount









// CL8812S

The CL8812S or CL8815S wallmount rangehood comes with silent air extraction from the Isodrive® motor system. It is constructed with the highest quality stainless steel and designed to withstand the harsh Australian environment.

The pyramid design ensures a large extraction zone to effectively capture smoke and airborne grease over any barbecue via 4-speed touch, remote control and 10-minute auto-shutoff function.



DESCRIPTION

- quality 304 grade stainless steel
- · silent Isodrive® motor
- 4 speed touch sensitive controls
- 10 minute auto shut off
- GU10 LED lights with a lifetime warranty
- dishwasher safe, commercial grade baffle filters
- 3 Year rangehood Warranty

TECHNICAL DATA

- CL8812S dimensions: (W x D) 1200 x 750 mm, 4 x baffle filters, 3 x LED lights, free ducting
- CL8815S dimensions: (W x D) 1500 x 750 mm, 5 x baffle filters, 4 x LED lights, free ducting

ISODRIVE POWER OPTIONS

- SP2.3000
- twin external motor
- 3000 m³/h airflow
- 200mm SteelFlex™ ducting (6m)
- install roof/wall

• SE.3200

- single external motor
- 3200 m³/h airflow
- 250mm SteelFlex[™] ducting (4m)
- install roof/wall
- 10 Year Motor Warranty







CL7272S, CL7275S // 120cm & 150cm // BBQ Alfresco Rangehood wallmount







// CL7272S (120cm)

When it comes to outdoor living, the CL7272S & CL7275S pride themselves on delivering optimal performance and precision. Using Schweigen's German Engineered Isodrive® technology, these stunning rangehoods bring powerful yet silent extraction to your cooking environment. Most notably, the CL7272S & CL7275S make a statement in design with their clean, modern

lines and simple geometric shapes. Using robust high grade 304 stainless steel, these models deliver durability and excellence for any outdoor space or under-cover patio. These grand wallmounts are for entertainers who want to make a bold statement in their outdoor living area.



DESCRIPTION

- quality 304 grade stainless steel
- silent Isodrive® motor system
- 3 speed push button control
- 4 x GU10 halogen lights
- dishwasher safe, commercial grade baffles
- 3 Year Warranty on rangehood

TECHNICAL DATA

CL7272S

- dimensions: (W x D) 1200 x 700 mm
- 4 x baffles

CL7275S

- dimensions: (W x D) 1500 x 700 mm
- 5 x baffles

MOTOR OPTIONS

- SP2.3000
- twin external motor
- 3000 m³/h airflow
- 200mm SteelFlex™ ducting (6m)
- install roof/wall

• SE.3200

- single external motor
- 3200 m³/h airflow
- 250mm SteelFlex[™] ducting (4m)
- install roof/wall

*Note: Best suited with dropin flush-mounted barbecues and models with shallow lids.



BBQ ALFRESCO

CL8812, CL8815 // 120cm & 150cm // BBQ Alfresco Rangehood wallmount with twin in-built motors







// CL8815 (150cm)

This incredibly powerful, stately wallmount rangehood comes in two measurement options of 120cm & 150cm. With twin, in-built motors providing a powerful airflow of 2700m³/hr, these rangehoods boast a match of performance with visual appeal. The CL8812 & CL8815 are built with the highest

// CL8812 (120cm)

quality, robust stainless steel, and are specifically designed to withstand the harsh Australian environment. The innovative pyramid design consists of a considerably large extraction zone, effectively capturing smoke and grease over any barbecue with the touch of easy-push button controls.



DESCRIPTION

- quality 304 grade stainless steel
- 3 speed eye level push button control
- 3 x LED lights
- dishwasher safe, commercial grade baffles
- 3 Year Warranty

TECHNICAL DATA

CL8812

- dimensions: (W x D) 1200 x 700 mm
- 4 x baffles

CL8815

- dimensions: (W x D) 1500 x 700 mm
- 5 x baffles

MOTOR OPTIONS

- · in-built twin motors
- 2700 m³/h airflow



CLUM10, CLUM12 // 100cm & 120cm // BBQ Alfresco Rangehood undermount with twin in-built motors









// 3 speed push button controls



// CLUM10 (100cm)

Schweigen's undermount CLUM10 & CLUM12 boast power, innovative design and durability. Using only the finest 304 grade stainless steel, these alfresco rangehoods are made considerably more durable for use in an outdoor room or under-cover patio. Their sleek, undermount design integrates

seamlessly into any alfresco cabinetry and outdoor dining area. With easy-to-use, push button controls, you are able to choose from 3 powerful speed levels originating from the twin, in-built motors. The CLUM10 & CLUM12 ensure efficient extraction of heavy smoke and grease created from any Australian barbecue.

DESCRIPTION

- quality 304 grade stainless steel
- 3 speed push button control
- 2x LED lights
- 3 dishwasher safe, commercial grade baffles
- 3 Year Warranty

TECHNICAL DATA

CLUM10

- dimensions: (W x D) 1000 x 500 mm
- 2 x 150mm outlets
- 1 x 200mm adaptor

CLUM12

- dimensions: (W x D) 1200 x 500 mm
- 2 x 150mm outlets
- 1 x 200mm adaptor

MOTOR OPTIONS

- in-built twin motors
- 2700 m³/h airflow



BBQ ALFRESCO

CL6272 // 120cm // BBQ Alfresco Rangehood wallmount with twin in-built motors







// CL6272

The CL6272 wallmount alfresco rangehood prides itself on being a pyramid of excellence. Focusing on modern demands of alfresco dining, this model accentuates innovation, power and quality. Using high grade 304 stainless steel, this canopy is more durable for use in an outdoor room or under-cover patio.

With twin, in-built motors, the CL6272 provides a powerful 2200m³/hr of airflow, delivering efficient extraction of steam and smoke to make for a fresh, clean outdoor living space.



DESCRIPTION

- quality 304 grade stainless steel
- 3 speed push button control
- 2 x GU10 halogen lights
- dishwasher safe, commercial grade baffles
- 3 Year Warranty

TECHNICAL DATA

CL6272

- dimensions: (W x D) 1200 x 600 mm
- 4 x baffles
- 2 x 150mm outlets

MOTOR OPTIONS


- in-built twin motors
- 2200 m³/h airflow





BR500, BR500ST // SILENT Multi-Purpose Exhaust Fan







Ideal for every household, this unit can be installed and vented into two rooms – by utilising the optional DVK500 kit. With silent operation, your bathroom and laundry will stay fresh and odour-free.

The revolution starts with a German made EBM motor and fan which is recognised as the quietest, most efficient and highest-

powered domestic extraction unit available today. However, even the quietest motors and fans on the market still generate noise. Using Schweigen's renowned concept of placing the motors externally on your roof or eaves, you can easily achieve silent operation of all household extraction units.

DESCRIPTION

- Universal mounting options Roof/Wall/Eaves
- Patented anti-water intrusion, weather protection system (IPX4 rated)
- Acoustic dome with super quiet, long vane, backward curved centrifugal fan
- Motor can be mounted up to 3 metres from the vent
- 5 Year Warranty on the motor
- Can be installed and vented to 2 adjacent rooms with the optional DVK500 kit

TECHNICAL DATA

BR500

- Motor includes:
 - Fan Module
 - Exhaust Vent
 - Bell Mouth Adaptor
 - 100mm Pipe
 - Flexible Ducting (3m)
 - Back Draught Shutter System
 - Instruction Manual

MOTOR OPTIONS

• S1.650

- single external motor
- 650 m³/h airflow
- 150mm flexi ducting (4m)
- install roof/wall/eaves

ST.900


- single external motor
- 900 m³/h airflow
- 200mm flexi ducting (4m)
- install roof/wall





Both the BR500 and DVK500 are now available together in one convenient bundle called the BR522.

BRW600 // SILENT Multi-Purpose Exhaust Fan

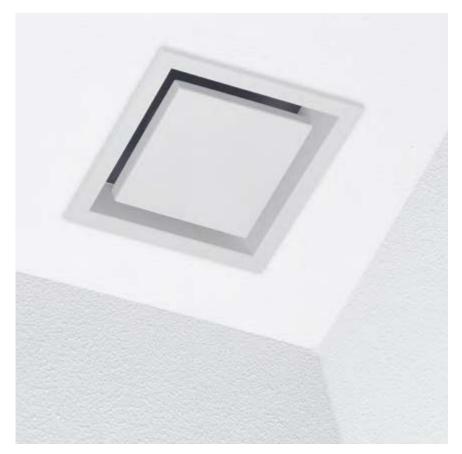



The Isodrive®-powered silent exhaust fan whisks away odours, steam, stale air and humidity in seconds with 650m³/hr airflow - efficiently reducing airborne bacteria and preventing mould growth.

Designed to be installed through the roof, wall or eave and suitable for almost any room in your unit, apartment, townhouse, single or multi-storey house – the BRW600 can also be vented to 2 adjacent rooms with the optional DVK600 kit.

DESCRIPTION

- Universal mounting options Roof/Wall/Eaves
- Patented anti-water intrusion, weather protection system (IPX4 rated)
- Acoustic dome with super quiet, long vane, backward curved centrifugal fan
- Motor can be mounted up to 3 metres from the vent
- 5 Year Warranty on the motor
- Can be installed and vented to 2 adjacent rooms with the optional DVK600 kit

TECHNICAL DATA

BRW600

- Motor includes:
- Fan Module
- Exhaust Vent
- Bell Mouth Adaptor
- 100mm Pipe
- Flexible Ducting (3m)
- Back Draught Shutter System
- Instruction Manual

MOTOR OPTIONS

• S1.650

- single external motor
- 650 m³/h airflow
- 150mm flexi ducting (4m)
- install roof/wall/eaves

• ST.900

- single external motor
- 900 m³/h airflow
- 200mm flexi ducting (4m)
- install roof/wall





Both the BRW600 and DVK600 are now available together in one convenient bundle called the BRW622.

BRB700 // SILENT Multi-Purpose Exhaust Fan





The Isodrive®-powered silent exhaust fan whisks away odours, steam, stale air and humidity in seconds with 650m³/hr airflow - efficiently reducing airborne bacteria and preventing mould growth.

Designed to be installed through the roof, wall or eave and suitable for almost any room in your unit, apartment, townhouse, single or multi-storey house – the BRB700 can also be vented to 2 adjacent rooms with the optional DVK700 kit.

DESCRIPTION

- Universal mounting options Roof/Wall/Eaves
- Patented anti-water intrusion, weather protection system (IPX4 rated)
- Acoustic dome with super quiet, long vane, backward curved centrifugal fan
- Motor can be mounted up to 3 metres from the vent
- 5 Year Warranty on the motor
- Can be installed and vented to 2 adjacent rooms with the optional DVK700 kit

TECHNICAL DATA

BRB700

- Motor includes:
- Fan Module
- Exhaust Vent
- Bell Mouth Adaptor
- 100mm Pipe
- Flexible Ducting (3m)
- Back Draught Shutter System
- Instruction Manual

MOTOR OPTIONS

• S1.650

- single external motor
- 650 m³/h airflow
- 150mm flexi ducting (4m)
- install roof/wall/eaves

• ST.900

- single external motor
- 900 m³/h airflow
- 200mm flexi ducting (4m)
- install roof/wall





Both the BRB700 and DVK700 are now available together in one convenient bundle called the BRW722.

$Isodrive^{\circledR}\ Motor\ Range \ {\it //\ SILENT\ EXTERNAL\ MOTOR}$

SELECTING THE RIGHT SILENT RANGEHOOD MOTOR

To maximise the performance of your rangehood, it is important to select a motor power option that suits the cooking technique you use the most.

Dishes high in spice ingredients or with intense smoke generated from a wok or grill, require much stronger extraction power to perform effectively.

The table below will help you identify the motor power option best suited to your rangehood and cooking extraction needs.























UNDERMOUNT // WALLMOUNT // ISLAND // CASSETTE

UNDERMOUNT // CASSETTE // ALFRESCO

ST Isodrive® 900

- Everyday Steaming/ Pan Frying/Grilling
- 900 m³/h of airflow
- Motor housing is made from ASA, the most durable of plastics in direct sunlight
- · Motor comes with solid roof extension pipe and bell housing

SP Isodrive® 1600

- · Heavy Steaming/Spicy Wok Frying/Grilling
- 1600 m³/h of airflow
- Motor housing is Colourbond® steel, which can be painted to any colour
- · Motor comes with solid roof extension pipe and bell housing
- · Suggested minimum power option for 90cm rangehoods over induction cooktops


SP2 Isodrive® 3000

- All Cooking Styles
- 3000 m³/h of airflow
- Motor housing is Colourbond® steel, which can be painted to any colour
- Motor comes with solid roof extension pipe and bell housing

SE Isodrive® 3200


- All Cooking Styles
- 3200 m³/h of airflow
- Motor housing is Colourbond® steel, which can be painted to any colour
- Motor comes solid roof extension pipe and Y joint
- Optional 3200 kit

MODEL NO.	AIRFLOW	CONFIGURATION	DUCT WIDTH	DUCT LENGTH	INSTALL ROOF	INSTALL WALL	INSTALL EAVES	INSTALL IN-WALL	CANOPY TYPE*
ST	900 m³/h	Single	200 mm	4 m	•	•	-	-	Wall, Island, Undermount
SP	1600 m³/h	Single	200 mm	6 m	•	•	-	-	Wall, Island, Undermount, Cassette
SP2	3000 m³/h	Twin	200 mm	6 m	•	•	-	-	Cassette, Alfresco
SE	3200 m³/h	Single	250 mm	4 m	•	•	-	-	Undermount, Cassette, Alfresco



^{*}Some exceptions apply. Product specifications subject to change without notice, images are for illustrative purposes only. Please check final product details with your retailer. © Schweigen Home Appliances Pty Ltd.

Complete Silent Ventilation Solution // SILENT EXTERNAL MOTOR

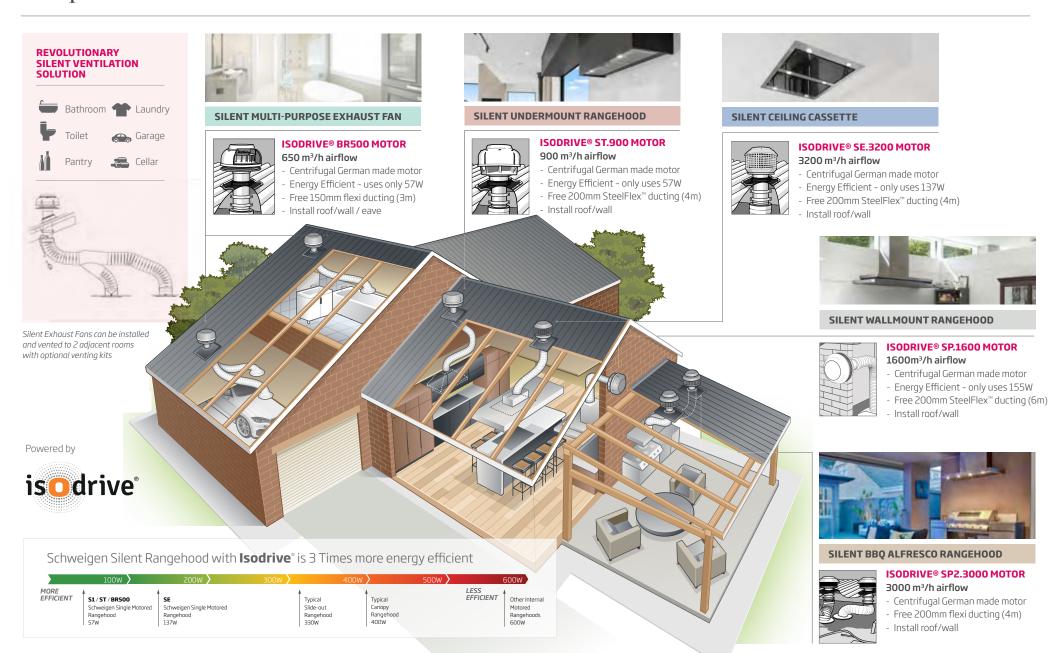


Technical Information // SILENT ISODRIVE® MOTOR // All measurements in millimetres

ENGAGE A PROFESSIONAL QUALIFIED INSTALLER


Schweigen motors have different mounting limitations due to weight and other factors. Not all motors can be mounted in the eaves for example, so make sure you check the motor manual and installation guide to ensure it meets your installation requirements. Checking with your builder or architect can also be helpful at the planning stage for a new kitchen renovation.

Installing a Schweigen silent rangehood system is a specialised task and requires a qualified, experienced professional. In order to operate correctly, the ducting must have an 's' bend, which requires skill if your home has a flat roof with no cavity. We strongly recommend that you use an installer from our network or a qualified professional trades person. Please visit our website for a full list of recommended installers.

Isodrive® **\$1.650** (Silent exhaust fan only) Weight: 2.7 kg without the PVC pipe.




Isodrive® **ST.900**Weight: 2.5 kg without the PVC pipe.
Shutter assembly (optional) is not shown in the diagram.

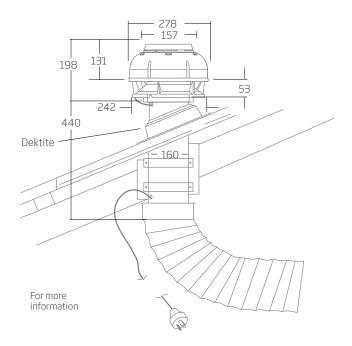


Product specifications subject to change without notice, images are for illustrative purposes only. Please check final product details with your retailer. © Schweigen Home Appliances Pty Ltd.

Technical Information // SILENT ISODRIVE® MOTOR // All measurements in millimetres


Isodrive® **SP.1600**Weight: 5.9 kg without the PVC pipe.
Shutter assembly (optional) is not shown in the diagram.

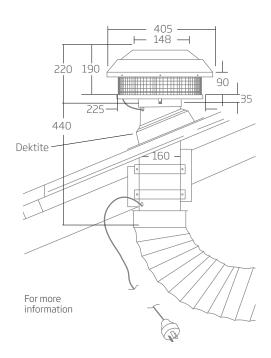

Isodrive® **SP2.3000** Twin Motor Weight: 5.9 kg each without the PVC pipe Note: Two motors included, may require a Y joint Shutter assembly (optional) is not shown in the diagram.

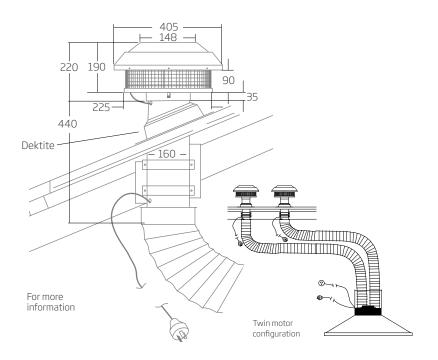

Isodrive® **SE.3200**Weight: 8.3 kg each without the PVC pipe



The Schweigen Experience // LOCAL CUSTOMER SERVICE

There's nothing worse than calling a company, waiting on hold forever, only to be put through to the wrong department or an entirely different country. No need to worry here at Schweigen, all of our customer service is based locally in Australia. Our service department operates through our head office in Mulgrave, Victoria, so rest assured there is always someone close by that can help you with your service needs. All of our sales calls are taken in our Perth office and distributed to the relevant department. So don't stress about waiting on hold forever, our handy, friendly and knowledgeable team is waiting and ready to assist you.

Schweigen 's customer service team can provide a personal on-road service and installation expert straight to your door. Just look out for the bright pink and white van near you. To contact your local Schweigen expert and installer please call **1300 829 066.**

Service & Warranty details can be found at: www.schweigen.com.au/support/service-and-warranty









The Schweigen Experience // product discovery and cooking demonstrations sessions

// Bree May // My Kitchen Rules Winner 2014 // Schweigen cooking demonstrator



// Samira Damirova // MasterChef contestant 2018



// Matteo Zamboni // Executive Chef - Civico 47



// Schweigen events chef



// Adelaide Appliance Gallery showroom

PRODUCT DISCOVERY SESSIONS

Not sure which product you want? Or need help with the technical details? Book yourself in for a 'Product Discovery Session' appointment for an exclusive walk through our range of innovative silent rangehoods and cooking appliances.

Here, we can help you finalise the details of that dream kitchen by directing you to the product that is right for you. Whether you're looking to keep a streamlined design in your kitchen with an undermount installed into overhead cabinetry, or create a feature with a ceiling cassette in a bulkhead, we can show you a model for every design and budget.

www.schweigen.com.au/showrooms

The Schweigen Experience // Breathe better with schweigen silent exhaust fans





NOW YOU CAN SAY NO TO MOULD WITH EVEN MORE CHOICE OF MOTORS AND BUNDLED OPTIONS FROM SCHWEIGEN'S RANGE OF SILENT EXHAUST FANS.

Schweigen's silent exhaust fans prevent mould build-up by swiftly and silent removing steam, odours and airborne bacteria without the use of harmful chemicals - leaving your living space cleaner and fresher for longer.


They are designed to be installed through the roof, wall or eave and suitable for almost any room in your unit, apartment, townhouse, single or multi-storey house - and are uniquely powered by the German-made Isodrive® motor (recognised as one of the quietest, most efficient and powerful domestic air extraction units available today).

These silent yet powerful units now whisk away odours, steam, stale air and humidity in seconds with a choice of 650 or 900m3/hr airflow. Each exhaust fan can also vent 2 adjacent rooms with an optional venting kit and are now available together in your choice of all-in-one bundles for hassle-free installations.

- Powerful silent extraction by the German-manufactured Isodrive® Motor System designed to be mounted outside the home for silent operation indoors.
- Multi-purpose ventilation suitable for use anywhere in the house - to remove steam from bathrooms, odours from toilets, condensation from laundry rooms, stale air from bedrooms, garage, wine cellar and more.
- Multi-room extraction from just one exhaust fan with whole of house multi-room models and venting kits now available as easy-to-install bundles.
- More extraction power options to suit your needs with 650 or 900m3/hr airflow.
- Flexible installation through the roof, wall or eave of your apartment, townhouse, single or multi-storey house.











Frequently Asked Questions // SCHWEIGEN CUSTOMER SERVICE

1. WHAT MAKES THE EXTERNAL MOTOR SYSTEM BETTER THAN STANDARD INTERNAL MOTOR SYSTEMS?

The externally motored unit removes motor noise from the kitchen and transfers it outside the home. All steam, smoke and cooking odours are expelled outside, leaving your kitchen cleaner and fresher. Built with quality and precision, the Schweigen silent Isodrive® guarantees performance and reliability for years to come. Using a mere 57 watts (Isodrive® 900 motor), we deliver high powered efficiency and energy savings of more than 300%.

2. CAN THE MOTOR BE HEARD INSIDE?

Installed correctly and used at the lower speeds, Schweigen silent rangehoods cannot be heard over the ambient noise within the kitchen. At higher speeds airflow may be heard, depending on the distance of the motor from the rangehood and the type of filters selected.

3. IS IT EASY TO CLEAN THE RANGEHOOD FILTERS? HOW OFTEN DO I NEED TO CLEAN THEM?

The filters are very easy to clean and can be washed by hand or in the dishwasher.

Washing by hand – Immerse the filter in hot water and a suitable detergent; when clean, rinse with plenty of hot water. Dry the filters with a cloth after washing, avoid leaving them to dry out by themselves.

Dishwasher – Put the filter in the dishwasher and select a short to medium program at low to moderate temperature, < 60C. (For stainless steel baffles you can use a higher

temperature setting for a more thorough clean.) Do not leave filters in the dishwasher after washing, to prevent deterioration.

Please note: Stainless steel filters may lose some shine after a few cleaning processes, this is normal.

Filters should be cleaned every 3-6 weeks or after 40 hours of use. For induction cooktop, please aim to clean them at least every 10 days, depending on use.

4. WHAT ARE THE BENEFITS OF USING LED LIGHTS?

LED (light emitting diode) lighting is very energy efficient. These lights generate very little heat which means almost all of the energy they consume is turned into light. They also last a long time; approximately 50 times longer than your average incandescent bulb.

5. CAN YOU INSTALL A SCHWEIGEN SILENT RANGEHOOD IN A DOUBLE STOREY HOUSE?

Yes. It is possible to install a Schweigen silent rangehood in a double storey house. The Isodrive® motor can be mounted on an external wall, under an eave (Isodrive® 650 only), depending on the suitability of your home design.

The Isodrive® 1600 is recommended for ducting requirements of 6-10 metres.

6. ARE THE MOTORS WEATHER-PROOF? CAN RAIN GET IN?

The Isodrive® motors are fitted with a water intrusion system; rain is prevented from entering the home as this patented

technology effectively directs rain and water away from the housing and down the roof. Our motors have an IPX4 waterproof rating and are approved for use outside. Please see the Isodrive® Manual for more information.

7. WHAT IS THE WARRANTY ON SCHWEIGEN SILENT RANGEHOODS?

10 Year Warranty* on the Isodrive® motor and 3 Year Warranty on the canopy.

At Schweigen, we are confident enough to offer you the peace of mind of a 10 Year Warranty on the German-made motor (on all silent rangehoods equipped with the Isodrive® motor system). We also offer a 3 Year Warranty on the canopy, so you can rest assured your system will stand the test of time when you choose Schweigen.

8. WHY DO WE USE STEELFLEX™ DUCTING?

The soft surface of SteelFlex™ Ducting softens the noise and as a result is quieter than any other type of ducting. Our SteelFlex™ Ducting is also fire rated where others may not be. Schweigen SteelFlex™ Ducting is made from dual foil, heavy duty material.


9. DO RANGEHOODS HAVE TO BE VENTED OUTSIDE?

Yes. Most councils in Australia recommend that all ducted rangehoods be vented outside. Check with your local council to make sure.


If you require further information please contact the Schweigen Technical & Installation Department on **1300 829 066**

*BR500 is excluded from the 10 Year Warranty

Optional accessories and parts // SILENT ISODRIVE® MOTOR // All measurements in millimetres



SteelFlex[™] ducting
Approx. 4m, 150mm



SteelFlex[™] **ducting** Approx. 6m, 200mm



In-line back draught shutter for 150mm ducting

// 150MMINLINEBDSSBUILD (Isodrive® 650 only)



Back draught shutter fit to bell mouth adaptor for 650 & BR500

// 150MMBDSSBUILD



Weather guard with bracket

// ISO3200WGBUILDASS



250-200mm reducer

// P2017



Flat roof mount flange

// P40113MF (Isodrive® 900 and 1600 only)



Baffle

Note: Some noise may occur due to baffle design ergonomics. Serial and model numbers of your rangehood are required to order.



Wall hanging bracket

// P1107 (Isodrive® 1600 only)



Wall cover plate

// P1108 (Isodrive® 900, 1600, 3000)

// P2025 (Isodrive® 3200 only)



Back draft stopper

// 250MMBDSSBUILDASS (Isodrive® 3200 only)

Optional accessories and parts can be ordered via our local customer service department on **1300 829 066**

Schweigen Rangehoods // PRODUCT SELECTOR

MODEL NUMBER	ТҮРЕ	AVAILABLE WIDTH	CANOPY DEPTH	MOTOR OPTIONS	BAFFLE OPTIONAL	NO. FILTERS	LIGHTS	AUTO SHUT-OFF	FAN SPEED	MATERIAL / FINISH
GA-600S	Undermount	600mm	295mm	ST.900/SP.1600/SE.3200	No	Two	2 LED	Yes	4	Stainless Steel
GA-900S	Undermount	900mm	295mm	ST.900/SP.1600/SE.3200	No	Three	2 LED	Yes	4	Stainless Steel
GA-1200S	Undermount	120mm	295mm	ST.900/SP.1600/SE.3200	No	Four	2 LED	Yes	4	Stainless Steel
KLS-9GLASSBLKS	Undermount	900mm	295mm	ST.900/SP.1600	No	One	1 Strip LED	Yes	4	Black Glass
KLS-9GLASS	Undermount	900mm	295mm	ST.900/SP.1600	No	One	1 Strip LED	Yes	4	White Glass
UM1170-6S	Undermount	600mm	295mm	ST.900/SP.1600	Yes	Two	2 LED	Yes	5	Stainless Steel
UM1170-9S	Undermount	900mm	295mm	ST.900/SP.1600/SE.3200	Yes	Three	2 LED	Yes	5	Stainless Steel
UM1170-6BS	Undermount	600mm	295mm	ST.900/SP.1600	Yes	Two	2 LED	Yes	5	Black Steel
UM1170-9BS	Undermount	900mm	295mm	ST.900/SP.1600/SE.3200	Yes	Three	2 LED	Yes	5	Black Steel
UM-PA9S	Undermount	895mm	295mm	ST.900/SP.1600	No	One	1 Strip LED	Yes	4	Stainless Steel
UM-9S	Undermount	864mm	295mm	ST.900/SP.1600	Mesh Opt.	Two	2 LED	Yes	5	Stainless Steel
UM-12UMS	Undermount	1200mm	295mm	SP .1600	Mesh Opt.	Four	2 LED	Yes	5	Stainless Steel
UM1390-6S	Undermount	600mm	390mm	ST.900/SP.1600	No	Two	2 LED	Yes	5	Stainless Steel
UM1390-9S	Undermount	900mm	390mm	ST.900/SP.1600	No	Three	2 LED	Yes	5	Stainless Steel
UM1390-12S	Undermount	1200mm	390mm	SP. 1600 / SE. 3200	No	Three	2 LED	Yes	5	Stainless Steel
WM-LIN9S	Wallmount	900mm	520mm	ST.900/SP.1600	No	Three	2 LED	Yes	4	Stainless Steel
KLS-ALBW9S	Wallmount	900mm	525mm	ST.900/SP.1600	No	Three	1 Fluro/2 LED	Yes	4	Stainless Steel & Black Glass
KLS-ALBB9S	Wallmount	900mm	525mm	ST.900/SP.1600	No	Three	1 Fluro/2 LED	Yes	4	Stainless Steel & White Glass
DS3131-R2S	Wallmount	898mm	500mm	ST.900/SP.1600/SE.3200	Yes	Three	2 LED	Yes	5	Stainless Steel
DS3170S	Wallmount	898mm	500mm	ST.900/SP.1600	Yes	Three	2 LED	Yes	5	Stainless Steel
DS3170-12S	Wallmount	1200mm	500mm	SP. 1600 / SE. 3200	Yes	Four	2 LED	Yes	5	Stainless Steel
WM2190-6S	Wallmount	600mm	500mm	ST.900/SP.1600	Yes	Two	2 LED	Yes	5	Stainless Steel
WM2190S	Wallmount	898mm	500mm	ST.900/SP.1600	Yes	Three	2 LED	Yes	5	Stainless Steel
WM-EX90S	Wallmount	900mm	520mm	ST. 900 / SP. 1600	No	Three	3 LED	Yes	4	Stainless Steel & Glass
DS3326-9S	Wallmount	898mm	500mm	ST.900/SP.1600	No	One	4 LED	Yes	5	Stainless Steel & Glass
DS3326B-9S	Wallmount	898mm	500mm	ST.900/SP.1600	No	One	4 LED	Yes	5	Black Steel & Glass

Schweigen Rangehoods // PRODUCT SELECTOR

MODEL NUMBER	ТҮРЕ	AVAILABLE WIDTH	CANOPY DEPTH	MOTOR OPTIONS	BAFFLE OPTIONAL	NO. FILTERS	LIGHTS	AUTO SHUT-OFF	FAN SPEED	MATERIAL / FINISH
CC-SURF2S	Cassette	1300mm	800mm	SP2.3000 / SE.3200	No	Two	6 LED	Yes	4	Stainless Steel
CC-INARTS	Cassette	2000mm	1000mm	SP2. 3000 / SE. 3200	No	Eight	10 LED	Yes	4	Stainless Steel
CC-PARA4S	Cassette (4 modules)	360mm each	360mm each	SP.1600/SP2.3000/SE.3200	No	Four	LED	Yes	4	Stainless Steel
CC-PARA4W	Cassette (4 modules)	360mm each	360mm each	SP.1600/SP2.3000/SE.3200	No	Four	LED	Yes	4	White
CC-PARA3S	Cassette (3 modules)	360mm each	360mm each	SP.1600/SP2.3000/SE.3200	No	Three	LED	Yes	4	Stainless Steel
CC-PARA3W	Cassette (3 modules)	360mm each	360mm each	SP.1600/SP2.3000/SE.3200	No	Three	LED	Yes	4	White
CC-PARA2S	Cassette (2 modules)	360mm each	360mm each	SP.1600/SP2.3000/SE.3200	No	Two	LED	Yes	4	Stainless Steel
CC-PARA2W	Cassette (2 modules)	360mm each	360mm each	SP.1600/SP2.3000/SE.3200	No	Two	LED	Yes	4	White
SCC1000-S	Cassette	1000mm	700mm	SP. 1600 / SE. 320	No	Two	-	No	1	Stainless Steel
SCC1200-S	Cassette	1200mm	700mm	SP.1600/SP2.3000/SE.3200	No	Two	2 LED Strip	No	1	Stainless Steel
UM422G-12S	Cassette	1200mm	700mm	SP.1600/SP2.3000/SE.3200	No	Two	6 LED	Yes	4	Stainless Steel & Black Glass
UM4220-12S	Cassette	1200mm	700mm	SP.1600/SP2.3000/SE.3200	No	Two	6 LED	Yes	4	Stainless Steel
IS4110S	Island	898mm	660mm	ST.900/SP.1600	Yes	Four	2 LED	Yes	5	Stainless Steel
CLUM12S	Alfresco (Undermount)	1200mm	500mm	SP2 .3000 / SE .3200	Only option	Three	2 LED	Yes	4	Stainless Steel
CLUM15S	Alfresco (Undermount)	1500mm	500mm	SP2.3000 / SE.3200	Only option	Four	4 LED	Yes	4	Stainless Steel
CL8812S	Alfresco (Wallmount)	1200mm	750mm	SP2 .3000 / SE .3200	Only option	Four	3 LED	Yes	4	Stainless Steel
CL8815S	Alfresco (Wallmount)	1500mm	750mm	SP2.3000 / SE.3200	Only option	Five	4 LED	Yes	4	Stainless Steel
CL8812	Alfresco (Wallmount)	1200mm	750mm	In-built twin motors. 2700 m ³ /h	Only option	Four	4 Halogen	No	3	Stainless Steel
CL8815	Alfresco (Wallmount)	1500mm	750mm	In-built twin motors. 2700 m ³ /h	Only option	Five	4 Halogen	No	3	Stainless Steel
CL7272S	Alfresco (Wallmount)	1200mm	700mm	SP2 .3000 / SE .3200	Only option	Four	4 Halogen	No	3	Stainless Steel
CL7275S	Alfresco (Wallmount)	1500mm	700mm	SP2 .3000 / SE .3200	Only option	Five	4 Halogen	No	3	Stainless Steel
CLUM10	Alfresco (Undermount)	1000mm	500mm	In-built twin motors. 2700 m ³ /h	Only option	Three	2 LED	No	3	Stainless Steel
CLUM12	Alfresco (Undermount)	1200mm	500mm	In-built twin motors. 2700 m ³ /h	Only option	Three	2 LED	No	3	Stainless Steel
CL6272	Alfresco (Wallmount)	1200mm	600mm	In-built twin motors. 2200 m ³ /h	Only option	Four	2 Halogen	No	3	Stainless Steel







CONSUMER INFORMATION

Under our policy of continuous product development, product specifications may change without notice. Prospective purchasers should therefore check with the manufacturer to ensure this publication correctly describes the products being offered for sale. All information supplied is to be used for general reference purposes only and is on the understanding that Schweigen Home Appliances will not be liable for any loss, liability or damage of whatever kind arising as a result of any reliance upon such information. Colours of products illustrated are as close as printing limitations allow. All pictures used in the brochure are for illustrative purposes only.







AUSTRALIA

Unit 4, 1-5 Lake Drive, Dingley Village VIC 3172

P: 1300 881 693 **E:** sales@schweigen.com.au

www.schweigen.com.au

NEW ZEALAND

5 Tolich Place, Henderson, Auckland 0610

P: 0800 200 510 **E:** info.parex@emerson.com

www.schweigen.co.nz