

Bollard Luminaire



Overview

The EasyLED commercial bollard boasts clean design lines and superior optical performance while reducing glare. Ideal for retail centers, retirement villages, schools and universities, public transit and airports, commercial buildings and medical facilities.



Product Information

Product Code	Luminaire Power	Operating Power	Lumens	Light Distribution	Dimensions	Weight
EST-RLQ-F10-4KBK	10W	110V-240V	920	360°	D168 x H800mm	5,6Kg
EST-RLQ-F25-4KBK	25W	110V-240V	2177	360°	D168 x H800mm	5,6Kg
EST-RLQ-H10-4KBK	10W	110V-240V	818	180°	D168 x H800mm	5,6Kg
EST-RLQ-H15-4KBK	15W	110V-240V	1202	180°	D168 x H800mm	5,6Kg

Technical Specification

Structure

Colours	Black
Material	Die-Cast Aluminium
Coating	Anti-ageing electrostatic spray process
IP Rating	Listed for wet locations IP65 sealed LED compartment
Mounting	Base frame fixed using 3 Trubolts
Lens	Clear Prismatic Diffuser - Internal Diffused Cone Reflector

Performance

Light Source	LED Module L70 Lumen Maintenance 66,000 Hrs @40°C
Driver	Electronic Driver, 100-240V, 50/60Hz PF>0.90.
Colour Temperature	4000K
Efficacy	80-92 Lm/W
Colour Rendering Index	>75Ra
Warranty	5 Years in -40 to 45°C ambient

*Projected per IESNA TM-21-11. Data references the extrapolated performance projections in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08

Mounting




Base frame
* Installation instructions included

Photometry

EST-RLQ-F


T5

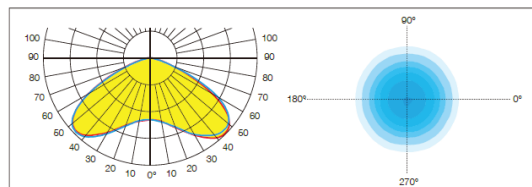

*IES Photometry Files available on request

EST-RLQ-H

T3M

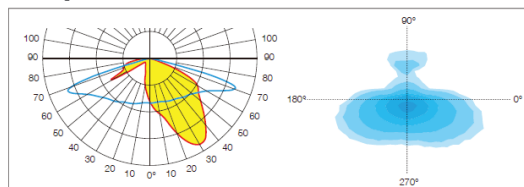

*IES Photometry Files available on request