

UGL LED Inground Light



Overview

High efficiency light source. High quality aluminium lamp fixture.
 Beautiful appearance and reasonable waterproof structure.
 Tempered glass as cover. Heat resisting and impact resistance.
 Supplied with plastic installation container and 0.5 m of connecting cable.



Symmetrical
 EST-UGL549-AC20D-3K
 EST-UGL1025-AC20D-3K



Asymmetrical
 EST-UGL549-AC45-35D-3K
 EST-UGL1025-AC45-35D-3K

Product Information


| Product Code | Luminaire Power | Operating Power | Lumens | Light Distribution | Dimensions | Weight |
|-------------------------|-----------------|-----------------|--------|--------------------|--------------|--------|
| EST-UGL549-AC20D-3K | 17.5W | 100V-240V | 1020 | 20° | 549x68x80mm | 6Kg |
| EST-UGL549-AC45-35D-3K | 17.5W | 100V-240V | 1020 | 45° 35° | 549x68x80mm | 6Kg |
| EST-UGL1025-AC20D-3K | 36.4W | 100V-240V | 2055 | 20° | 1025x68x80mm | 12Kg |
| EST-UGL1025-AC45-35D-3K | 33.6W | 100V-240V | 2114 | 45° 35° | 1025x68x80mm | 12Kg |

Technical Specification

Structure

| | |
|--------------|---|
| Colours | Dark Grey |
| Material | Aluminium Housing with 316L Front Plate |
| Coating | Powder Coated |
| IP Rating | IP67 |
| IK Rating | IK07 |
| Light Window | Step Tempered Glass T=6mm |


Dimensions - EST-UGL549

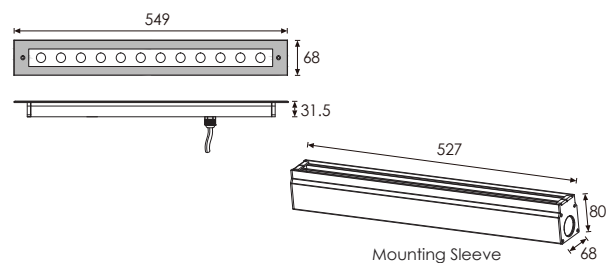


Performance

| | |
|--------------------|---|
| Light Source | OSRAM |
| Driver | 100-240V, 50/60Hz |
| Colour Temperature | 3000K |
| Efficacy | 56-63 Lm/W |
| Operating Current | 79 mA (17.5W) / 156 mA (36.4W) / 146 mA (33.6W) |
| Warranty | 2 Years in -20 to 40°C ambient |



Dimensions - EST-UGL1025

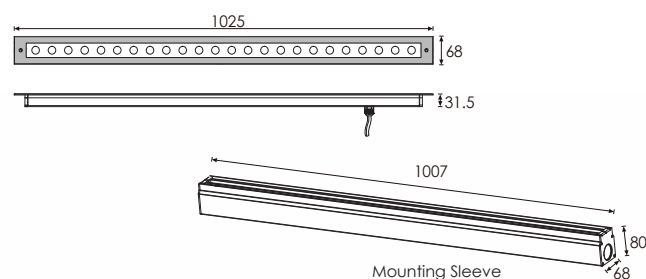


Application Picture



Symmetrical

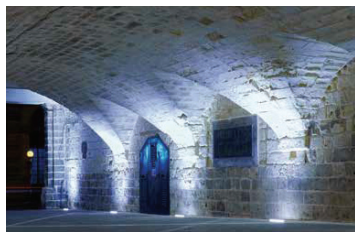


Asymmetrical

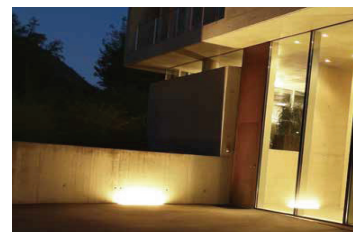

Photometry

Symmetrical - EST-UGL549-AC20D-3K / EST-UGL1025-AC20D-3K



Asymmetrical - EST-UGL549-AC45-35D-3K / EST-UGL1025-AC45-35D-3K

