

## Linear Light Solution



### Overview

The Vorso Linear LED batten provides diffused illumination with a wide distribution to illuminate the ceiling. Suitable for interior commercial environments. Ideal for Commercial, Retail, Office, Stairwell, Storage Facilities and Car parks. Surface Mount Kit included. Suspension Kit can be ordered separately.



### Product Information

Product Code	Luminaire Power	Operating Power	Lumens	Light Distribution	Dimensions	Weight
EST-V2LIN20W-3/4K	20W	220V-240V	2400	120°	600x80x36mm	0.6Kg
EST-V2LIN40W-CCT	40W	220V-240V	4800	120°	1200x80x36mm	1.0Kg
EST-V2LIN60W-3/4K	60W	220V-240V	7200	120°	1500x80x36mm	1.2Kg
EST-V2LIN60W-5K-P2	60W	220V-240V	7200	120°	1500x80x36mm	1.4Kg

## Technical Specification


### Structure

Colours	White
Material	Aluminium Housing
Lens	Reeded Diffuser Lense
IP Rating	IP42


### Performance

Light Source	High Quality SMD Epistar
Driver	220-240V, 50/60Hz PF>0.80
Colour Temperature	3000 / 4000 / 5000K
Efficacy	120 Lm/W
Colour Rendering Index	>80Ra
Life Expectancy L90	35,000 Hrs

### Dimensions

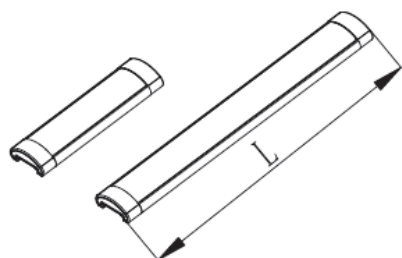

EST-V2LIN20W L: 600mm  
 EST-V2LIN40W L: 1200mm  
 EST-V2LIN60W L: 1500mm



### Optional (Dimmable - only available with G1 40W Vorso - External Driver)

EST-VLIN40WD-4K (Dimmable)

EST-VLIN40W-4K (Non-Dimmable)

1200x75x24mm

3600lm

