

Bollard Luminaire



Overview

The EasyLED commercial bollard boasts clean design lines and superior optical performance while reducing glare. Ideal for retail centers, retirement villages, schools and universities, public transit and airports, commercial buildings and medical facilities.



Product Information

| Product Code | Luminaire Power | Operating Power | Lumens | Light Distribution | Dimensions | Weight |
|------------------|-----------------|-----------------|--------|--------------------|---------------|--------|
| EST-RLQ-F10-4KBK | 10W | 110V-240V | 920 | 360° | D168 x H800mm | 5,6Kg |
| EST-RLQ-F25-4KBK | 25W | 110V-240V | 2177 | 360° | D168 x H800mm | 5,6Kg |
| EST-RLQ-H10-4KBK | 10W | 110V-240V | 818 | 180° | D168 x H800mm | 5,6Kg |
| EST-RLQ-H15-4KBK | 15W | 110V-240V | 1202 | 180° | D168 x H800mm | 5,6Kg |

Technical Specification

Structure

| | |
|-----------|---|
| Colours | Black |
| Material | Die-Cast Aluminium |
| Coating | Anti-ageing electrostatic spray process |
| IP Rating | Listed for wet locations IP65 sealed LED compartment |
| Mounting | Base frame fixed using 3 Trubolts |
| Lens | Clear Prismatic Diffuser - Internal Diffused Cone Reflector |

Performance

| | |
|------------------------|---|
| Light Source | LED Module L70 Lumen Maintenance 66,000 Hrs @40°C |
| Driver | Electronic Driver, 100-240V, 50/60Hz PF>0.90. |
| Colour Temperature | 4000K |
| Efficacy | 80-92 Lm/W |
| Colour Rendering Index | >75Ra |
| Warranty | 5 Years in -40 to 45°C ambient |

*Projected per IESNA TM-21-11. Data references the extrapolated performance projections in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08

Mounting




Base frame
* Installation instructions included

Photometry

EST-RLQ-F


T5

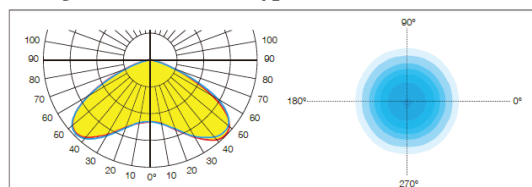

*IES Photometry Files available on request

EST-RLQ-H

T3M

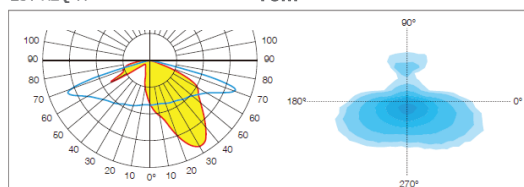

*IES Photometry Files available on request