

UGL LED Inground Light



Overview

High efficiency light source. High quality aluminium lamp fixture.
 Beautiful appearance and reasonable waterproof structure.
 Tempered glass as cover. Heat resisting and impact resistance.
 Supplied with plastic installation container and 0.5 m of connecting cable.



Symmetrical
 EST-UGL549-AC20D-3K
 EST-UGL1025-AC20D-3K



Asymmetrical
 EST-UGL549-AC45-35D-3K
 EST-UGL1025-AC45-35D-3K

Product Information


Product Code	Luminaire Power	Operating Power	Lumens	Light Distribution	Dimensions	Weight
EST-UGL549-AC20D-3K	17.5W	100V-240V	1020	20°	549x68x80mm	6Kg
EST-UGL549-AC45-35D-3K	17.5W	100V-240V	1020	45° 35°	549x68x80mm	6Kg
EST-UGL1025-AC20D-3K	36.4W	100V-240V	2055	20°	1025x68x80mm	12Kg
EST-UGL1025-AC45-35D-3K	33.6W	100V-240V	2114	45° 35°	1025x68x80mm	12Kg

Technical Specification

Structure

Colours	Dark Grey
Material	Aluminium Housing with 316L Front Plate
Coating	Powder Coated
IP Rating	IP67
IK Rating	IK07
Light Window	Step Tempered Glass T=6mm


Dimensions - EST-UGL549

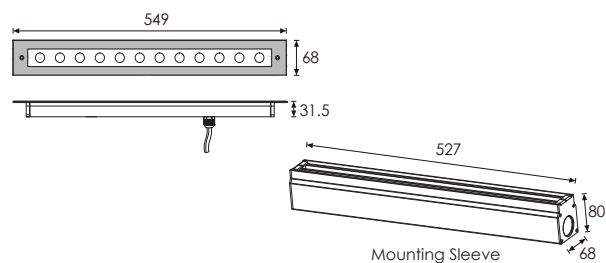


Performance

Light Source	OSRAM
Driver	100-240V, 50/60Hz
Colour Temperature	3000K
Efficacy	56-63 Lm/W
Operating Current	79 mA (17.5W) / 156 mA (36.4W) / 146 mA (33.6W)
Warranty	2 Years in -20 to 40°C ambient



Dimensions - EST-UGL1025

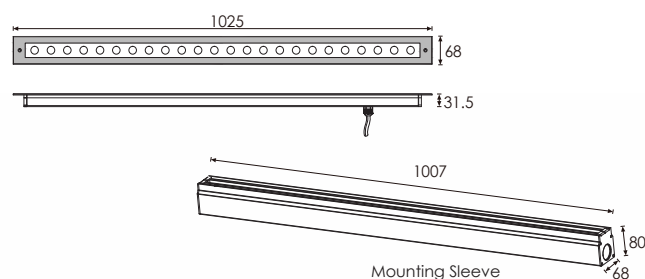


Application Picture



Symmetrical

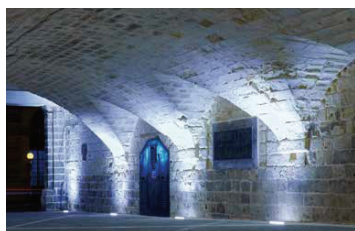


Asymmetrical

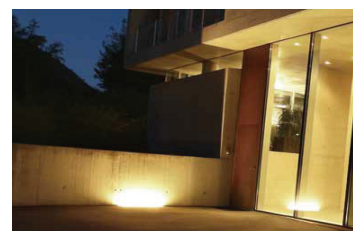

Photometry

Symmetrical - EST-UGL549-AC20D-3K / EST-UGL1025-AC20D-3K



Asymmetrical - EST-UGL549-AC45-35D-3K / EST-UGL1025-AC45-35D-3K

