

## LED Wall Light & Stair Light



### Overview

The D1 commercial recessed wall light boasts clean design lines and superior optical performance. Ideal for retail centers, retirement villages, schools and universities, public transit and airports, commercial buildings and medical facilities.



### Product Information

Product Code	Luminaire Power	Operating Power	Lumens	Light Distribution	Dimensions	Weight
EST-D13034-4K	10W	100V-240V	300	120°	310x65x55mm	0.9Kg

## Technical Specification


### Structure

Colours	Dark Grey
Material	Die-Cast Aluminium
Coating	Powder Coated
IP Rating	IP65
IK Rating	IK10


### Performance

Light Source	NICHIA
Driver	100-240V, 50/60Hz
Colour Temperature	4000K
Efficacy	30 Lm/W
Operating Current	44 mA
Warranty	3 Years in -20 to 40°C ambient

### Mounting

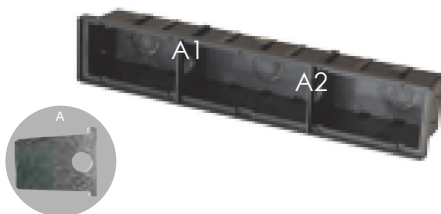


### Application Picture

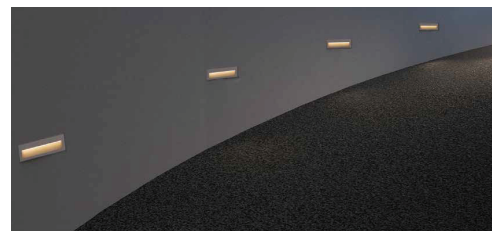

- The above picture – the supporting plate "A1" and "A2" are used for preventing deformation of the sleeve during the construction installation process.
- Please remove the supporting plate "A1" and "A2" from the mounting sleeve before the lamp installation.

### Photometry



### Dimensions

