



X-ONE



X-ONE



**ENGINE**

Manufacturer	Kawasaki FX730, FX850, FX850 EFI
HP	KOHLER Command Pro 54"RD, 60"RD: 23.5HP - FX730 52", 60": 25HP - Command Pro 52", 60", 72": 27HP - FX850 60", 72": 29.5HP - FX850 EFI (Per SAE J1995)
Displacement	FX730: 726cc, FX850: 852cc Command Pro: 725cc
Cooling	Air cooled
Air Cleaner	Heavy duty canister
Engine Warranty	3 year

**DRIVE SYSTEM**

Type	Dual hydrostatic
Transmission	Parker unitized 12cc/rev pump & 15.9ci/rev wheel motors
Hydraulic Cooling	Transmission mounted fans
Speed	Up to 10.5 mph
Parking Brakes	Patented automatic

**DECKS**

Cutting Width	Side discharge: 52", 60", 72" Rear discharge: 54", 60"
Cutting Heights	1" - 5.5"
Deck Lift	Foot operated
Depth	5.5"
Blades	3
Blade Length	52": 17.86" 54" RD: 18.5" 60", 60" RD: 20.50" 72": 23.86"
Blade Tip Speed	52": 17,700 54"RD: 18,300 60", 60" RD: 18,800 72": 18,500
Spindles	Ductile cast iron with steel shafts and sealed ball bearings
Deck Belts	1 per deck
Drive	Electric PTO clutch
Construction	Fabricated 7ga. with 7ga. wrappers
Spindle Mounts	52", 60", 72": Reinforced 7ga. stamped disc 54" RD, 60" RD: 10ga. with 11ga. doubler
Impact/Trim Areas	11ga. formed channel with rolled edge

**CONSTRUCTION**

Frame	1.5" x 3.0" steel tubing
Front Axle	Fabricated with tapered roller bearings
Front Caster Wheels	Mounted with tapered greasable bearings and debris cap
Front Caster Forks	Fabricated 1/2" steel

**GENERAL**

Seat	I3M suspension seat
Fuel Capacity	11.7 gallons
Cup Holder	Yes
Front Tire	13 x 6.5 - 6
Drive Tire	52", 54" RD: 24 x 9.5 - 12 60", 60" RD, 72": 24 x 12 - 12

**DIMENSIONS**

Weight	52": 1240 lbs 54" RD: 1275 lbs 60": 1245 lbs, 60"(KOHLER): 1290 lbs 60" RD: 1305 lbs 72": 1320 lbs
Height w/rops up	72.5"
Height w/rops Folded	49"
Length	52", 54" RD, 60" RD, 60": 80.2" 72": 84"
Width	52": 54.4" 54" RD: 55.72" 60": 62.4" 60" RD: 61.72" 72": 75.7"
Tire Width	52", 54" RD: 51" 60", 60" RD, 72": 54.5"
Trim Side	52": 1.4" 54" RD: 2.7" 60": 3.2" 72": 11.7"

**PRODUCTIVITY\***

Acres Per Hour	52": 5.52 54" RD: 5.73 60" 60" RD: 6.36 72": 7.64
----------------	--

\* Number based on 80% efficiency. This rating is to account for actual mowing conditions including overlapping, turning and terrain.

\*\* Specifications are subject to change without notice.

AVAILABLE DECK SIZES  
52"- 72" 54"- 60" RD



**LIMITED WARRANTY**

**2** YEAR **NO** HOUR LIMIT **OR** **5** YEAR **500** HOUR

LIMITED **LIFETIME WARRANTY**  
FRAME & LEADING EDGE OF DECK

Visit [hustlerturf.com](http://hustlerturf.com) and try our compare products tool!


# X-ONE

**Fabricated Frame for Durability**  
1.5" x 3.0" steel frame making it one of the toughest and most durable in its class.



**NEW!**

**VX Deck**  
Fabricated 7 ga. steel engineered for extreme vacuum for enhanced performance and cut quality.

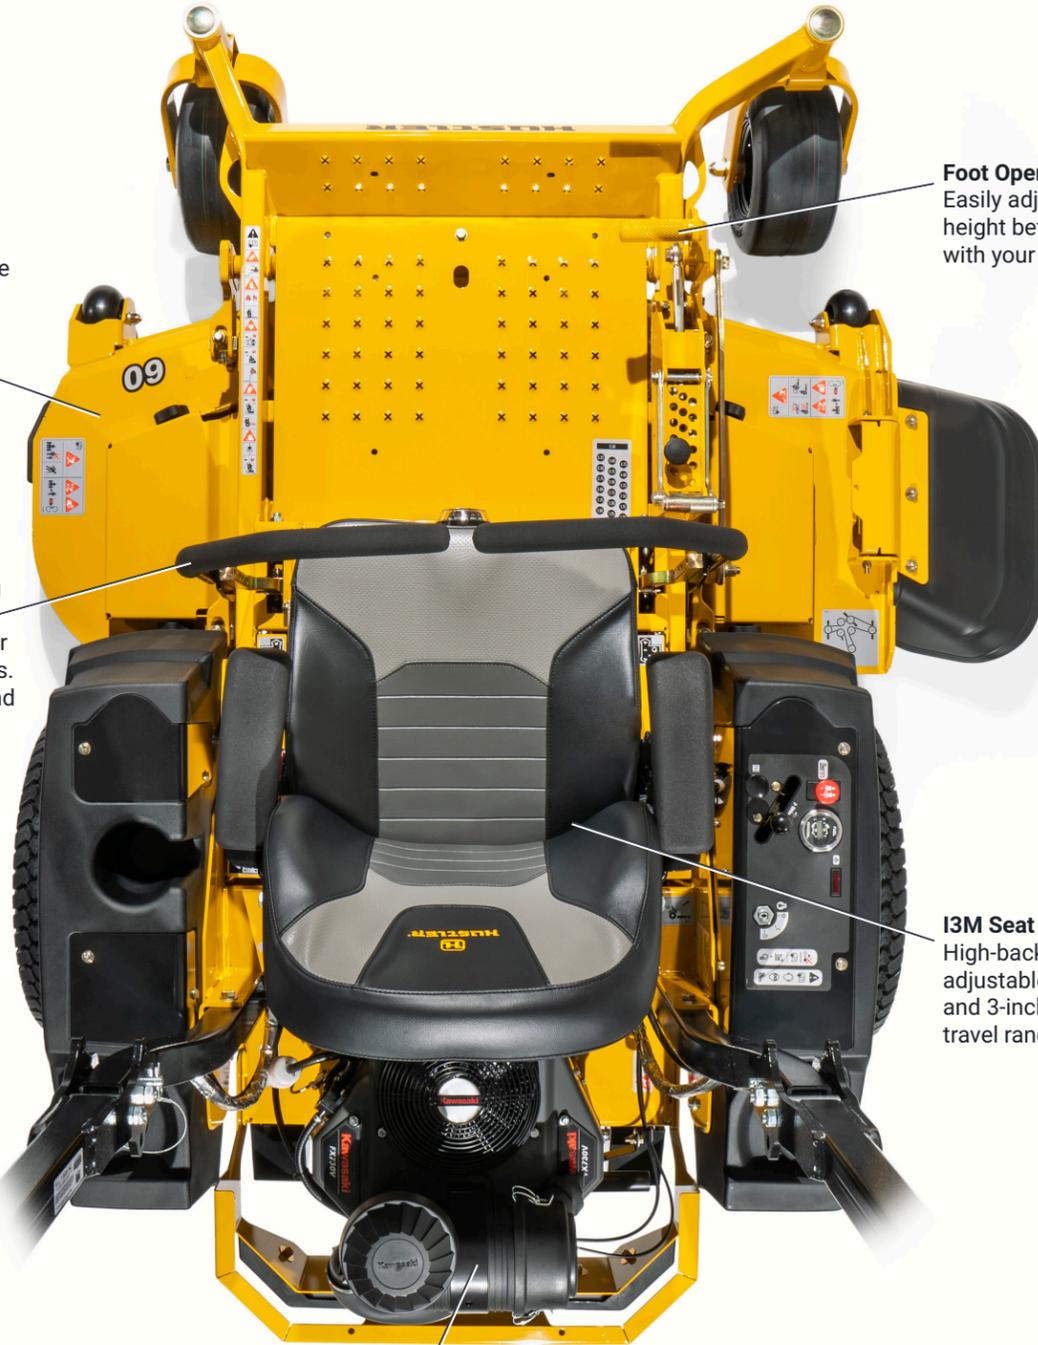

**Foot Operated Deck Lift**  
Easily adjust the deck height between 1" - 5.5" with your foot.

**SmoothTrak™ Steering**  
Precision control to help trim and maneuver easily around obstacles. You will fully understand SmoothTrak steering when you drive ours and drive theirs.

**Commercial-grade Torque**  
Driven by Parker unitized transmissions.

**I3M Seat**  
High-back seat with adjustable armrests and 3-inch suspension travel range.

**Commercial-Grade Engines**  
Kawasaki FX and Kohler Command Pro Engine options backed by 3 year warranties.



## ACCESSORIES

- ▶ Semi pneumatic front tires
- ▶ Steering lever extension kit
- ▶ Deck rear anti-scalp wheels
- ▶ 3-bag grass catcher (12 bushels)
- ▶ BacVac bagger (10 bushels)
- ▶ Mesh side bagger (3 bushels)
- ▶ Metal side bagger (3.5 bushels)
- ▶ Flex Forks®
- ▶ Mulch kit
- ▶ Light kit
- ▶ Stripe kit
- ▶ Electric deck lift
- ▶ Hitch kit
- ▶ Michelin® X® Tweel® Turf

## VX DECK TECHNOLOGY



**Engineered for extreme vacuum.**

The all new Hustler VX deck more efficiently draws the grass up into the mower blades providing a cleaner cut which in turn creates a superior after cut appearance.