



Board-Con Female Connector 180°, 1.27mm, 2 - 50 Position,
1 row, 1 housing, housing height 4.40mm


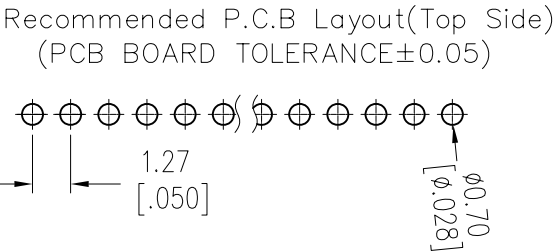


NOTES:
Current Rating: 1,00 Amp
Contact Resistance: 20mΩ max.
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ min.
Operation Temperature: -40°C to +105°C

Contact Material: Copper Alloy

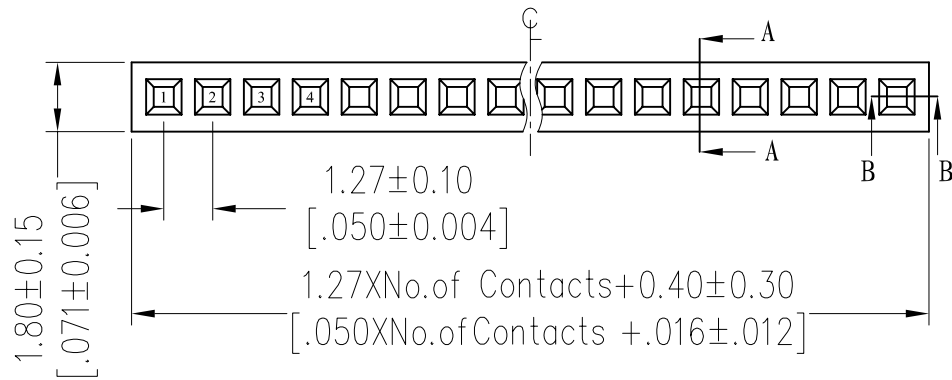

OPERATION	
X.X	± 0.40
X.XX	± 0.25
X.XXX	± 0.15
Angle	$\pm 3^\circ$
DIM	TOL

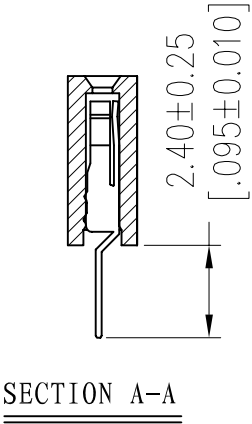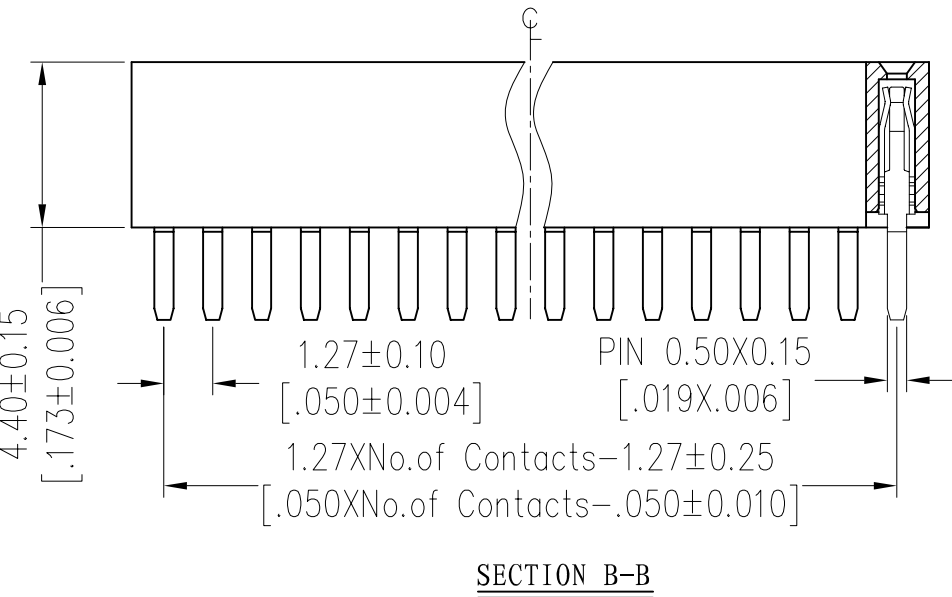

B0049-XXXXX				
# of Contacts	Type	Plating	Material	Packaging
2 - 50		Gold Flash 10μ" Gold 15μ" Gold 30μ" Gold Gold Flash/Tin 10μ" Gold/Tin 15μ" Gold/Tin 30μ" Gold/Tin Tin	PA9T	Tube
1	20.05.2021	issued	NIL	
REV	DATE	NOTE	NAME	