



Board-Con Male Connector 90°, 2.00 x 2.00mm, 9 - 120 Position, 3 rows, 2 housings, housing height 8.75mm, Housings on both sides


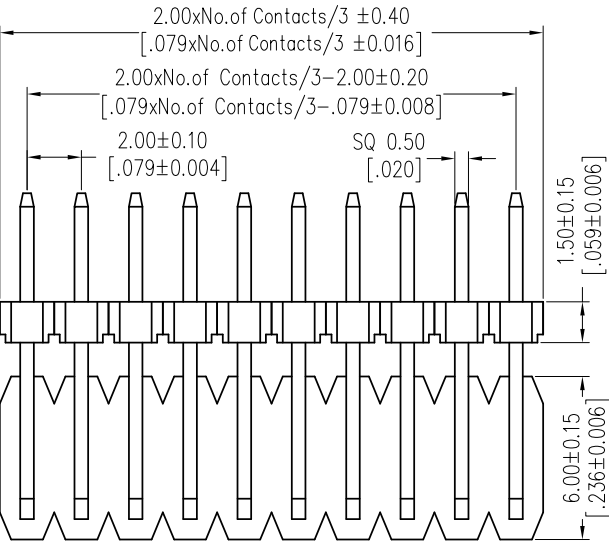


NOTES:
Current Rating: 2,00 Amp
Contact Resistance: 20mΩ max.
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ min.
Operation Temperature: -40°C to +105°C


Contact Material: Copper Alloy

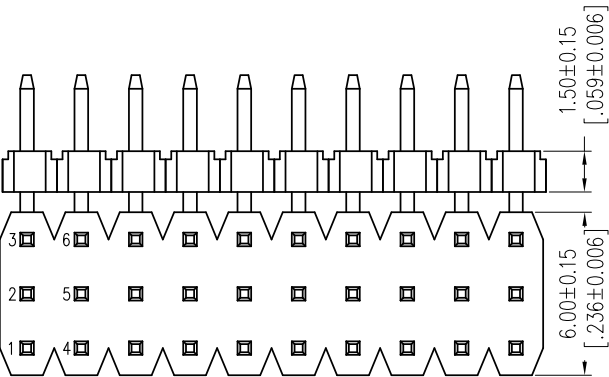

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)

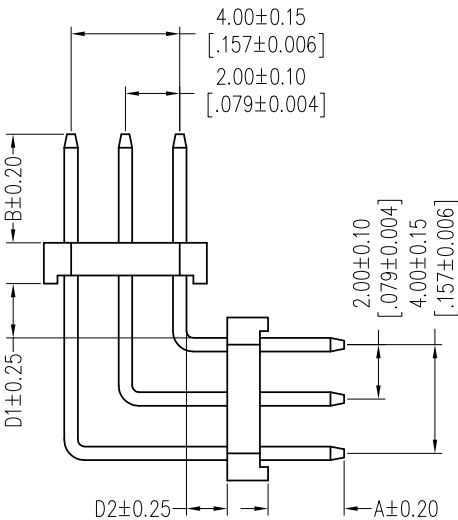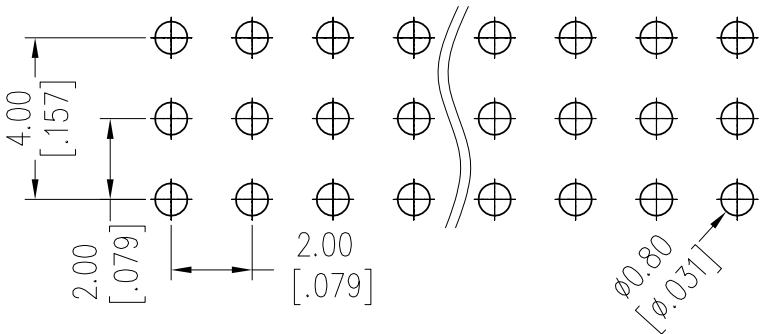

TYPE 1

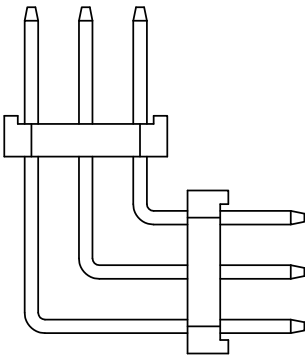

TYPE 2

# of Contacts	Type	Plating	Material	Packaging
9 - 120	1	Gold Flash	PA9T	Tube
	2	10µ" Gold		PE Bag
		15µ" Gold		
		30µ" Gold		
		Gold Flash/Tin		
		10µ" Gold/Tin		
		15µ" Gold/Tin		
		30µ" Gold/Tin		
		Tin		
		Matte Tin		

B0323-XXXXX

REV	DATE	NOTE	NAME
1	23.06.2021	issued	NIL