



Board-Con Male Connector 180°, 3.50 x 6.00mm, 4 - 20 Position, 2 rows, 1 housing, housing height 4.50mm


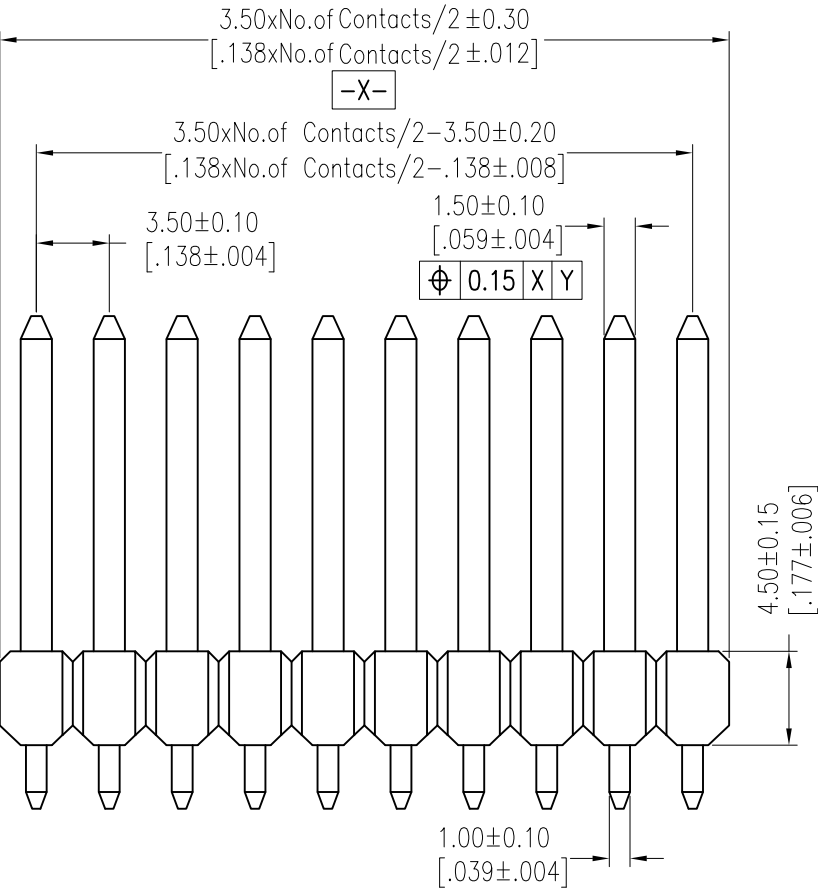


NOTES:
 Current Rating: 16,00 Amp
 Contact Resistance: 10mΩ max.
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ min.
 Operation Temperature: -40°C to +105°C

Contact Material: Copper Alloy

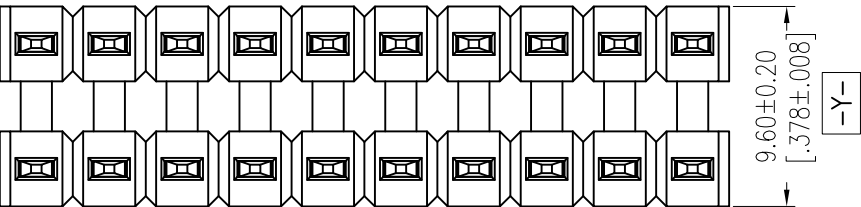

Recommended P.C.B Layout (Top Side) (PCB BOARD TOLERANCE±0.05)

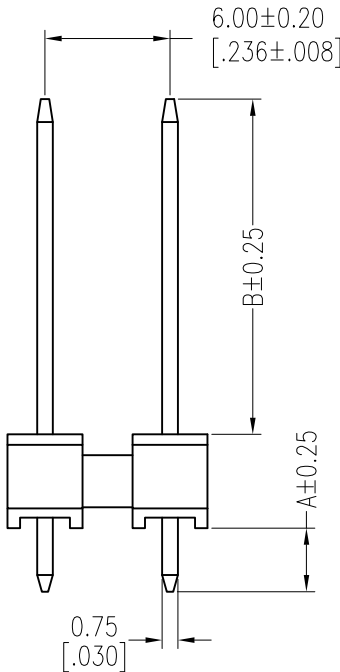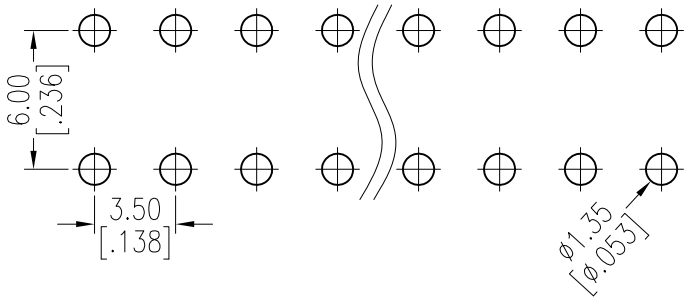

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

B0426-XXXXX

# of Contacts	Type	Plating	Material	Packaging
4 - 20		Matte Tin	LCP	PE Bag Tube

Dimensions		
	Standard	Customized
A:	3,05mm	
B:	11,20mm	

REV	DATE	NOTE	NAME
1	29.06.2021	issued	NIL