


Board-Con Male Connector 180°, 2.00 x 2.00mm, 9 - 120 Position, 3 rows, 2 housings, housing height 2.00mm






NOTES:
Current Rating: 2,00 Amp
Contact Resistance: 20mΩ max.
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ min.
Operation Temperature: -40°C to +105°C


Contact Material: Copper Alloy

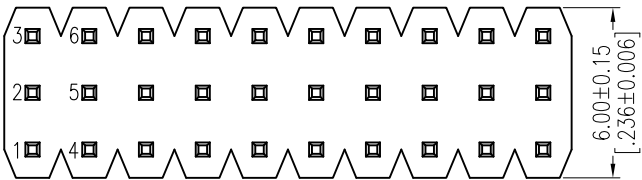

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)

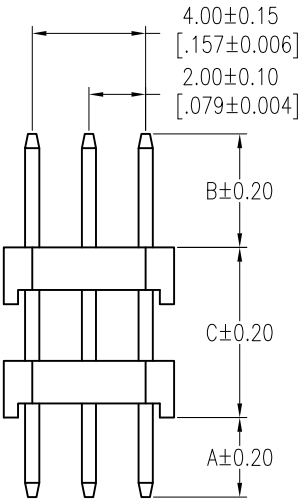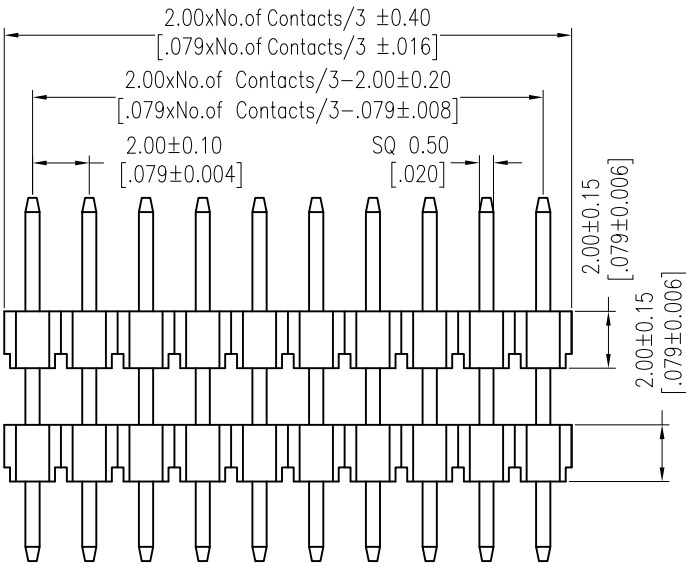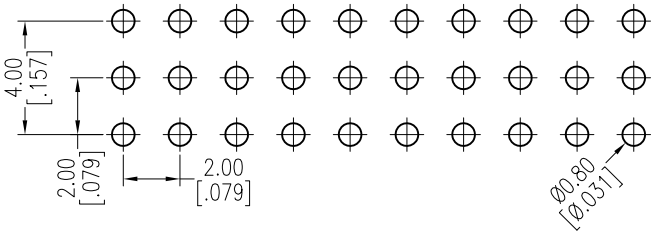

TYPE 1

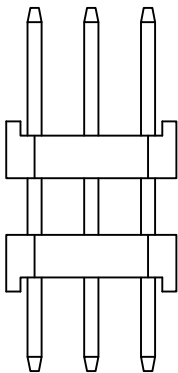

TYPE 2

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

B0429-XXXXX

# of Contacts	Type	Plating	Material	Packaging
9 – 120	Type 1 Type 2	Gold Flash 10µ" Gold 15µ" Gold 30µ" Gold Gold Flash/Tin 10µ" Gold/Tin 15µ" Gold/Tin 30µ" Gold/Tin Tin Matte Tin	PA9T	PE Bag Tube

Dimensions		
	Standard	Customized
A:	2,80mm	
B:	4,00mm	
C:	6,00mm	

1	30.05.2021	issued	MCS
REV	DATE	NOTE	NAME