



Board-Con Male Connector 180°, 2.00 x 2.00mm, 9 - 120 Position, 3 rows, 1 housing, housing height 2.00mm


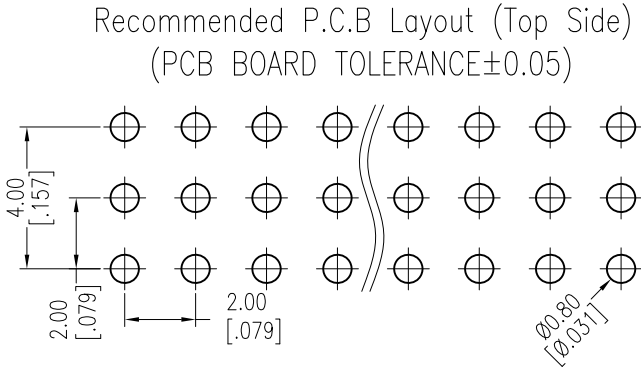


NOTES:
Current Rating: 2,00 Amp
Contact Resistance: 20mΩ max.
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ min.
Operation Temperature: -40°C to +105°C

Contact Material: Copper Alloy

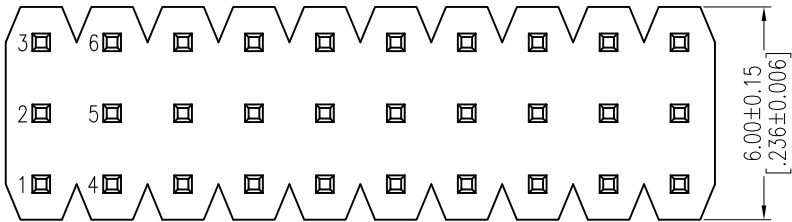

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

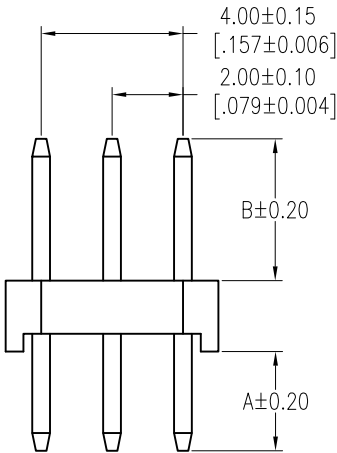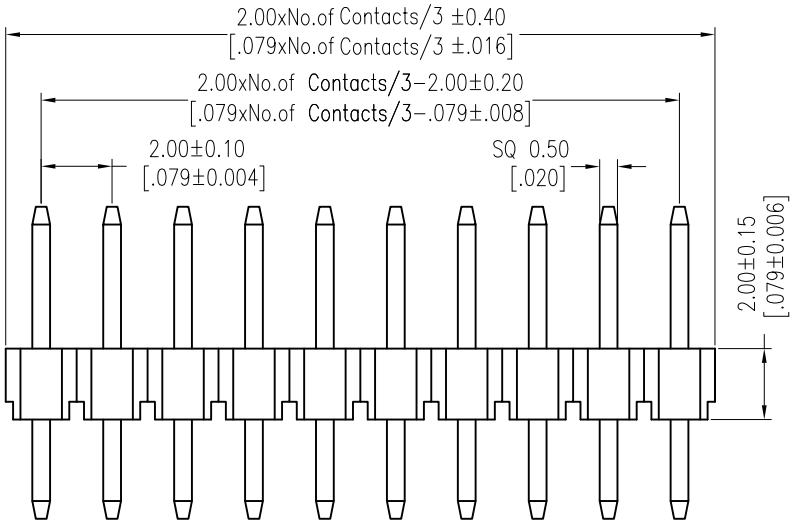

B0430-XXXXX

# of Contacts	Type	Plating	Material	Packaging
9 - 120		Gold Flash 10µ" Gold 15µ" Gold 30µ" Gold Gold Flash/Tin 10µ" Gold/Tin 15µ" Gold/Tin 30µ" Gold/Tin Tin Matte Tin	PA9T	PE Bag Tube

Dimensions	
Standard	Customized
A: 2,80mm	
B: 4,00mm	

1	30.05.2021	issued	MCS
REV	DATE	NOTE	NAME