Board-Con Female Connector 180°, 2.54 x 2.54mm, 6 - 120 Position, 3 rows, 2-5 housings, housing height 8.50mm, Additional housings

PANCON CONNECTORS

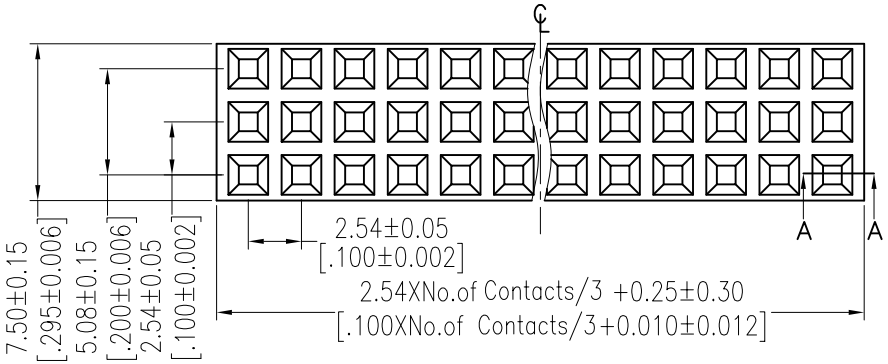

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

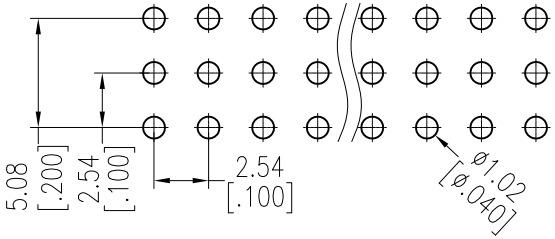

NOTES:
Current Rating: 3,00 Amp
Contact Resistance: 20mΩ max.
Withstand Voltage: 1000V AC/DC
Insulation Resistance: 1000MΩ min.
Operation Temperature: -40°C to +105°C

Contact Material: Copper Alloy

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

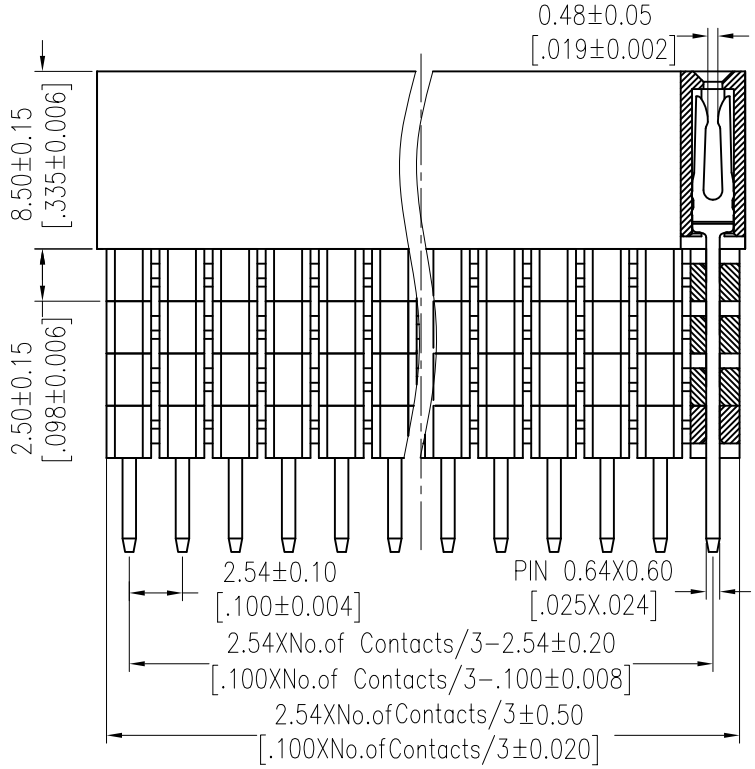

SECTION A–A

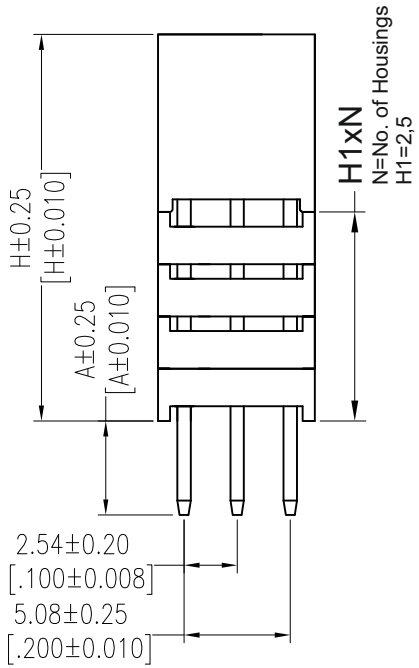

B0125-XXXXX

# of Contacts	Type	Plating	Material	Packaging
6 - 120		Gold Flash 10µ" Gold 15µ" Gold 30µ" Gold Gold Flash/Tin 10µ" Gold/Tin 15µ" Gold/Tin 30µ" Gold/Tin Tin	PA9T	Tray Tube

Dimensions		
	Standard	Customized
A:	2,30mm	
H:	11,00mm	
N:	1	

REV	DATE	NOTE	NAME
2	24.08.2021	revised	PER
1	27.05.2021	issued	NIL

Pancon GmbH, Siemensstrasse 7, 61267 Neu-Anspach
Tel: +496081-964-0, www.pancon.de