



CRIMP-CON SMT STRAIGHT WITH BOARD-LOCK, Series 300,
3.00 x 3.00mm, 2 rows, 2 - 24 Positions, black


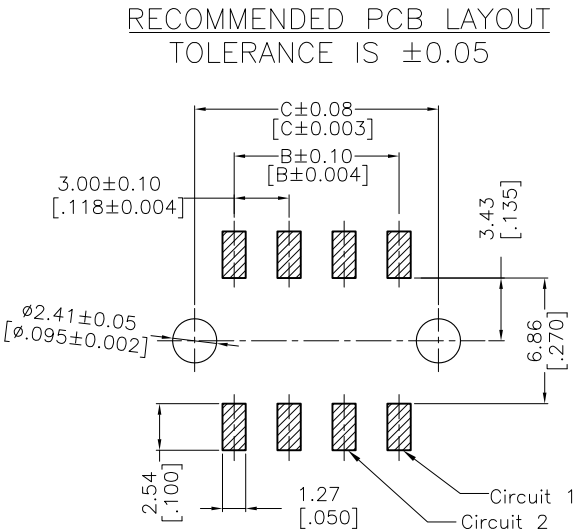


NOTES:
Current Rating: 5,0 AMP
Contact Resistance: 10mΩ max.
Withstand Voltage: 1000V AC/Minute
Insulation Resistance: 1000MΩ min.
Operation Temperature: -25°C to +85°C

Contact Material: Copper Alloy
Contact Plating: Au/Sn over Ni

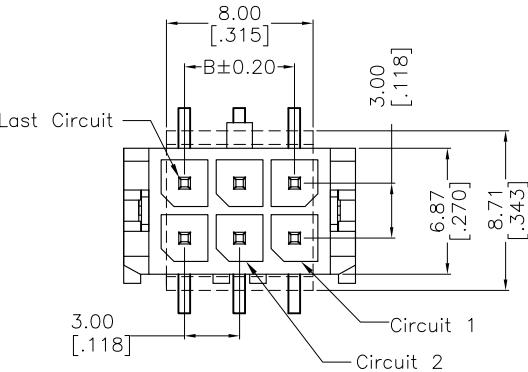

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

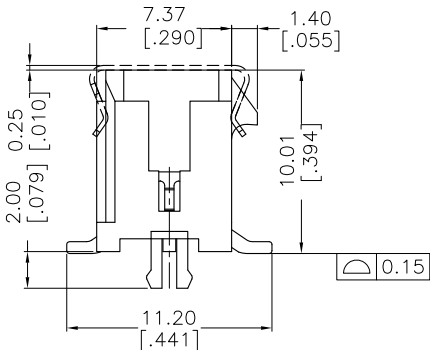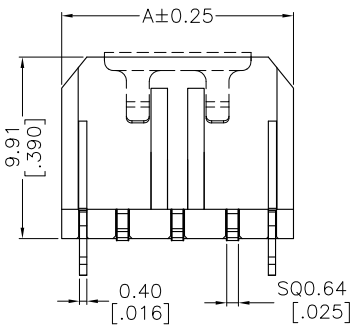

CLS 300 - 2 XX - B X B							
Pitch	Material	No. of rows	Positions per row	Plating	Color	Packaging	Option
3,00mm	- = LCP ULV94V-0		01 02 03 04 05 06 07 08 09 10 11 12		B = Black	0 = PE-Bag J = Tray R = T&R T = Tube	
No. of Position	Dimension [mm]						
	A	B	C				
02	6,65	n/a	4,30				
04	9,65	3,00	7,30				
06	12,65	6,00	10,30				
08	15,65	9,00	13,30				
10	18,65	12,00	16,30				
12	21,65	15,00	19,30				
14	24,65	18,00	22,30				
16	27,65	21,00	25,30				
18	30,65	24,00	28,30				
20	33,65	27,00	31,30				
22	36,65	30,00	34,30				
24	39,65	33,00	37,30				

1	26.08.2021	issued	PER
REV	DATE	NOTE	NAME