


Mas-Con; Pitch 3,96mm; 180°; breakable; with locking; 2-24 Position



NOTES:
Contact Plating: Sn over Ni (Au on request)
Insulator Color: Black

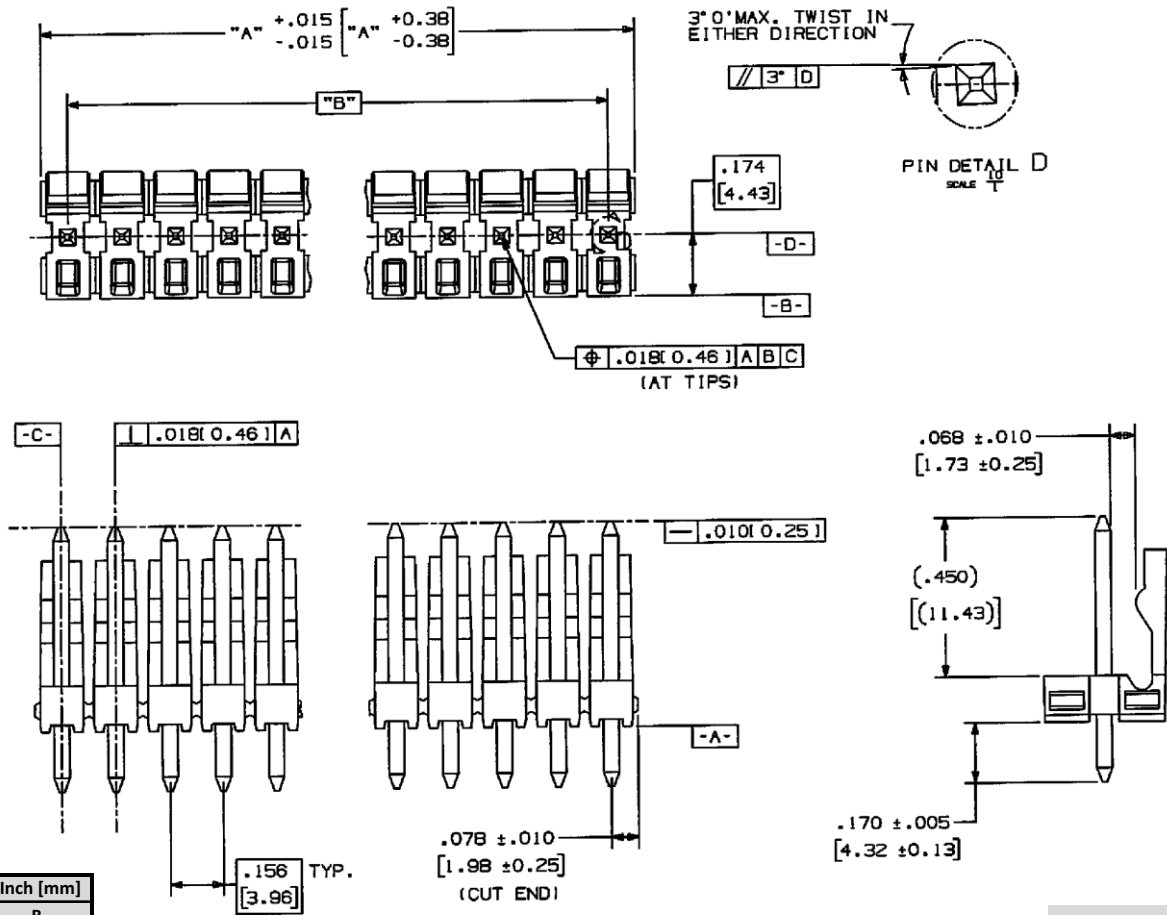

Positions	Dimensions in Inch [mm]		Positions	Dimensions in Inch [mm]	
	A	B		A	B
-	-	-	13	2.028 [51.51]	1.872 [47.55]
2	.312 [7.92]	.156 [3.96]	14	2.184 [55.47]	2.028 [51.51]
3	.468 [11.89]	.312 [7.92]	15	2.340 [59.44]	2.184 [55.47]
4	.624 [15.85]	.468 [11.89]	16	2.496 [63.40]	2.340 [59.44]
5	.780 [19.81]	.624 [15.85]	17	2.652 [67.36]	2.496 [63.40]
6	.936 [23.77]	.780 [19.81]	18	2.808 [71.32]	2.652 [67.36]
7	1.092 [27.74]	.936 [23.77]	19	2.964 [75.29]	2.808 [71.32]
8	1.248 [31.70]	1.092 [27.74]	20	3.120 [79.25]	2.964 [75.29]
9	1.404 [35.66]	1.248 [31.70]	21	3.276 [83.21]	3.120 [79.25]
10	1.560 [39.62]	1.404 [35.66]	22	3.432 [87.17]	3.276 [83.21]
11	1.716 [43.59]	1.560 [39.62]	23	3.588 [91.14]	3.432 [87.17]
12	1.872 [47.55]	1.716 [43.59]	24	3.744 [95.10]	3.588 [91.14]

MLSS156- XX - X

Positions
02 - 24

Size of Bag
2 - 5 Positions (500pcs/bag): D
>5 Positions (100pcs/bag): C

REV	DATE	NOTE	NAME
2	14.02.2022	comp. Revised	PER
1	27.07.2020	issued	JAL