

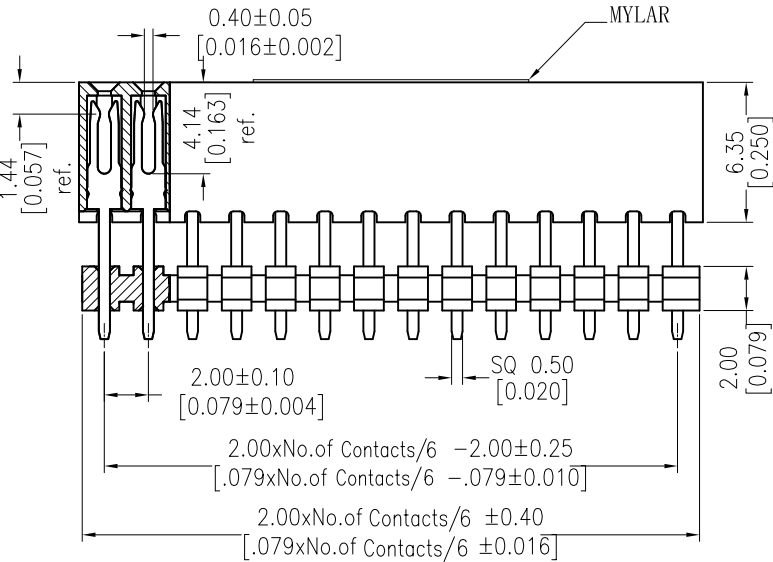


Board-Con Female Connector 180°, 2.00 x 2.00mm, 12 - 240 Position, 6 rows, 2-5 housings, housing height 6.35mm, Additional housings

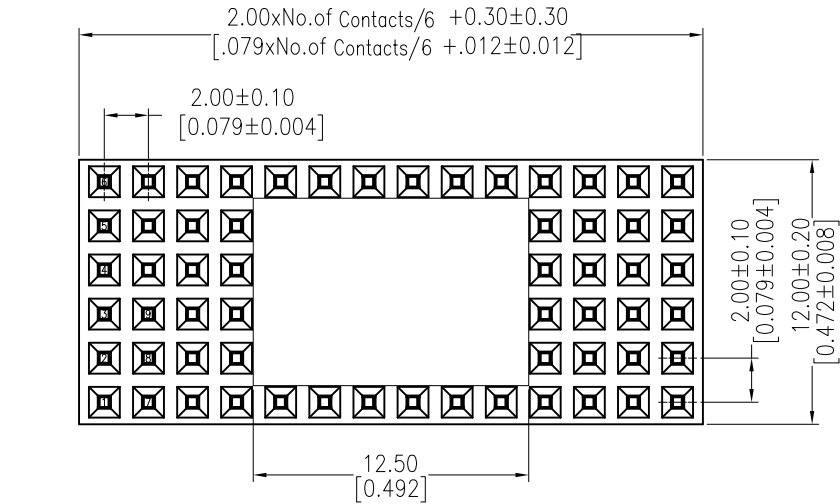



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

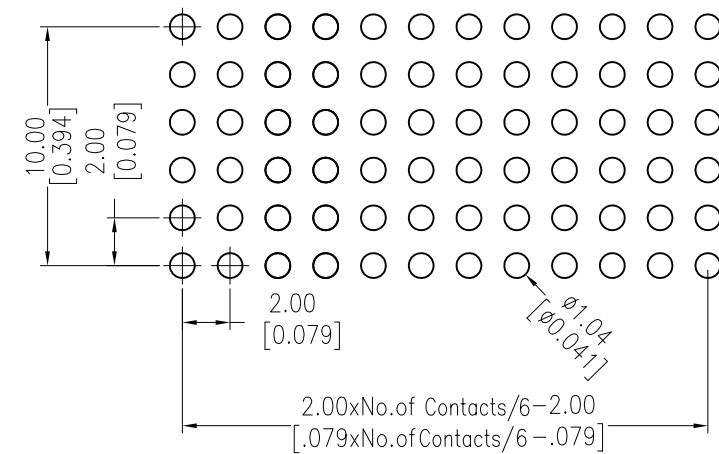

NOTES:
Current Rating: 2.00 Amp
Contact Resistance: 20mΩ max.
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ min.
Operation Temperature: -40°C to +105°C

Contact Material: Copper Alloy

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

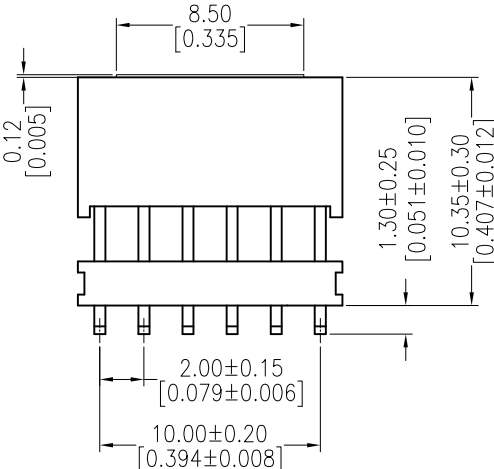

B0141-XXXXX

# of Contacts	Type	Plating	Material	Packaging
12 - 240		Gold Flash 10µ" Gold 15µ" Gold 30µ" Gold Gold Flash/Tin 10µ" Gold/Tin 15µ" Gold/Tin 30µ" Gold/Tin Tin Matte Tin	PA9T LCP	Tray Tube T&R+Mylar

REV	DATE	NOTE	NAME
2	30.06.2022	Title fixed	PER
1	29.05.2021	issued	NIL