






MAS-CON FEMALE THROUGH, Series 156, pitch 3,96mm, polarized



NOTES:
Current Rating: 5.0 - 8.0 AMP
Voltage Rating: 300V AC
Contact Resistance: 10mΩ max.
Withstand Voltage: 2200V AC/DC/Minute
Insulation Resistance: 5000MΩ min.
Operation Temperature: -55°C to +105°C

Contact Material: Copper Alloy
Contact Plating: Sn over Ni (Au on request)
Insulator Material: PA66 UL94 V-2

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

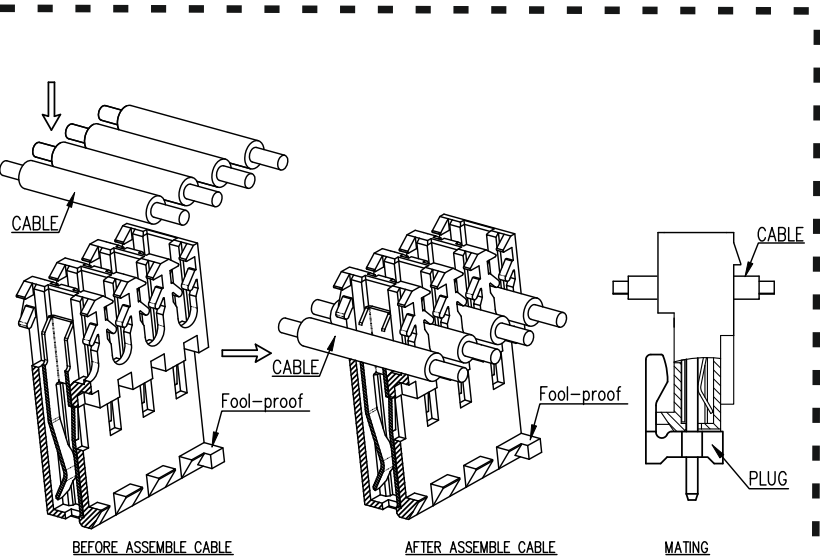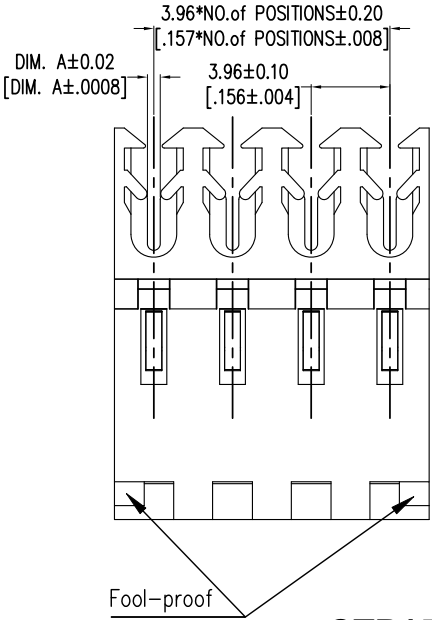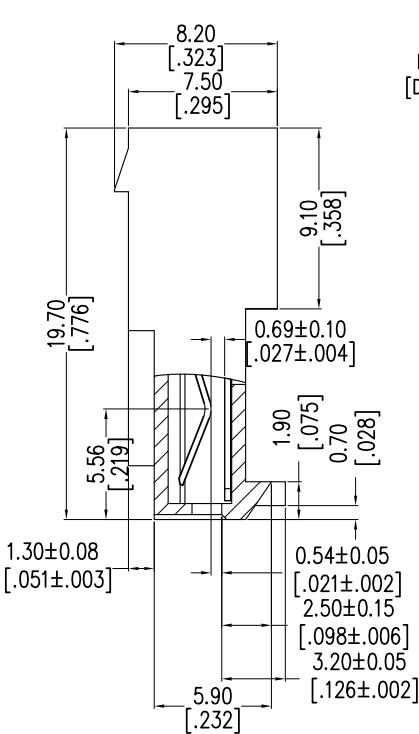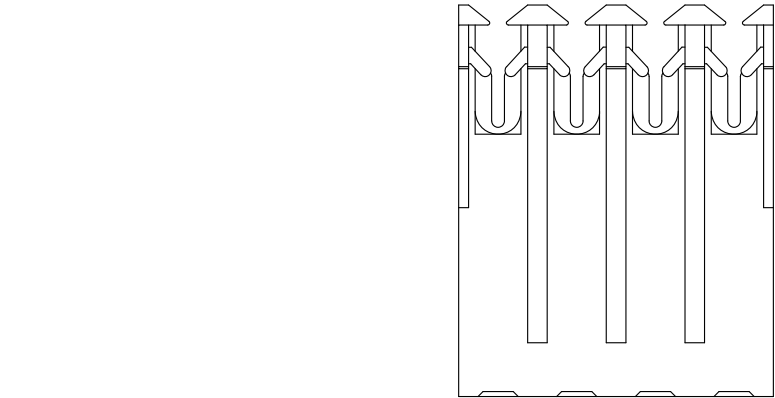

CTP156F XX - XX - X X _E

AWG	18, 20, 22, 24
Positions	02 - 24
Size of Bag	2 - 5 Positions (500pcs/bag): D >5 Positions (100pcs/bag): C
Plating	0,38μm Au over Ni: A 0,38μm selective Au over Ni: B Tin: Blank

AWG	Dim. A [mm]	Current Rating [AMP]	Color Marking
24	0,34	5,00	black
22	0,48	6,50	red
20	0,64	7,50	brown
18	0,85	8,00	nature

REV	DATE	NOTE	NAME
4	07.07.2022	Au plating added	PER
3	05.11.2020	revised	JAL
2	21.01.2020	comp. revised	LAD
1	26.11.2019	issued	LAD