

LEVELERS

Hygienic Design to Reduce Contamination



Easy clean
SERIES

Easy clean levelers

Easy clean levelers are constructed from durable stainless steel and provide a hygienic solution to reduce contamination. Movex Levelers are stocked and assembled in the US and Canada for immediate delivery. Our team can assist you on discovering the best solution for your application.



Benefits

- Excellent hygienic conformity
- Aesthetically pleasing design
- Standard sizes in stock
- Excellent stability and strength
- Easily adjustable

Properties

- High quality stainless steel construction
- Corrosive resistant
- Absorbs vibration
- Non-slip base
- Easy clean design to reduce contamination

Key

Sp = Spindle thread size

Th = Total height

L = Spindle length

N = Newtons

4° = Articulation

E = Anchor hole center

15° = Diameter of hole





LEVELERS

Easy clean SERIES

Available Diameter:

Ø 2.00" - Ø 2.60" - Ø 3.00" - Ø 4.00" - Ø 5.00" - Ø 5.90" - Ø 7.10"

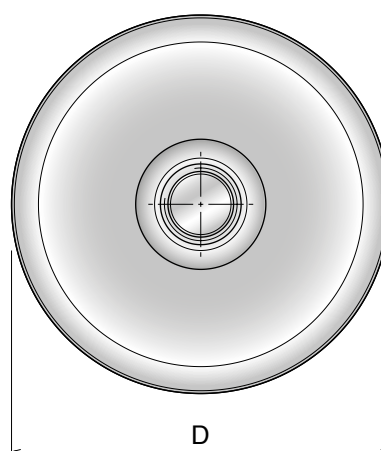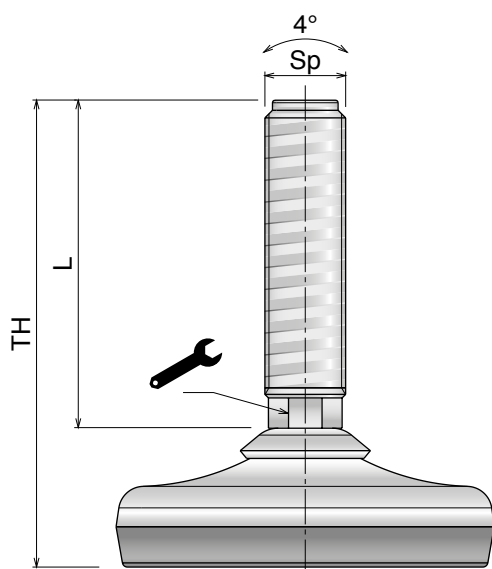

Material

Base: Stainless steel AISI 304
and vulcanized rubber

Spindle and washer: Stainless steel AISI 304

Rubber: 70 Shore hardness

Accessories - Stainless steel nuts

Part	Article-Nr.	Spindle
998	99802Y	1/ -
998	99804Y	/ -
998	99805Y	3/ -
998	99806Y	1-8




Ø 2.00"



Base diameter Ø 2.00"

Part	Article-Nr.	Sp	TH	L	
919	91902Y	1/ -	3.94	2.95	0.35
919	91903Y		5.91	4.92	0.35
920	92002Y	/ -	5.51	4.53	0.51
920	92003Y		7.48	6.50	0.51
921	92103Y	3/ -	6.50	5.51	0.63

LBS 675

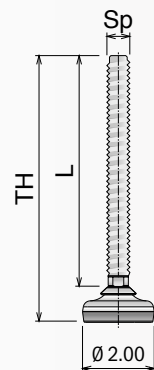


Ø 2.60"



Base diameter Ø 2.60"

Part	Article-Nr.	Sp	TH	L	
972	97202Y	1/ -	4.30	2.95	0.35
972	97203Y		6.27	4.92	0.35
973	97302Y	/ -	5.88	4.53	0.51
973	97303Y		7.85	6.50	0.51
974	97403Y	3/ -	6.86	5.51	0.63

LBS 1200

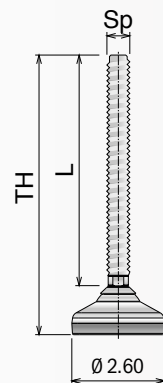


Ø 3.00"



Base diameter Ø 3.00"

Part	Article-Nr.	Sp	TH	L	
922	92202Y	1/ -	4.13	2.95	0.35
922	92203Y		6.10	4.92	0.35
923	92302Y	/ -	5.70	4.53	0.51
923	92303Y		7.68	6.50	0.51
924	92403Y	3/ -	6.69	5.51	0.63

LBS 1800

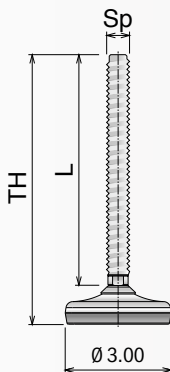


Ø 4.00"



Base diameter Ø 4.00"

Part	Article-Nr.	Sp	TH	L	
925	92502Y	/ -	5.90	4.53	0.51
925	92503Y		7.87	6.50	0.51
926	92602Y	3/ -	6.89	5.51	0.63
926	92603Y		8.86	7.48	0.63
927	92703Y	1-8	8.86	7.48	0.75
927	92704Y		11.22	9.84	0.75

LBS 4500

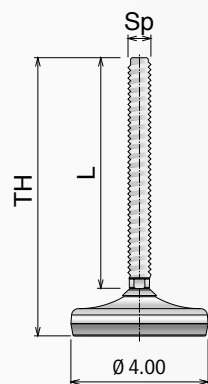


Ø 5.00"



Base diameter Ø 5.00"

Part	Article-Nr.	Sp	TH	L	
928	92802Y	3/ -	7.10	5.51	0.63
928	92803Y		9.05	7.48	0.63
929	92903Y	1-8	9.05	7.48	0.75
929	92904Y		11.41	9.84	0.75

LBS 6750

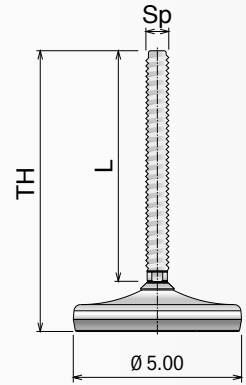


Ø 5.90"



Base diameter Ø 5.90"

Part	Article-Nr.	Sp	TH	L	
975	97502Y	3/ -	6.86	5.51	0.63
975	97503Y		8.83	7.48	0.63
976	97602Y	1-8	8.83	7.48	0.75
976	97603Y		11.19	9.84	0.75
977	97703Y	1 1/ -	8.83	7.48	0.95
977	97704Y		11.19	9.84	0.95

LBS 7800

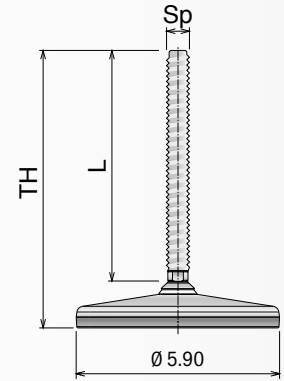


Ø 7.10"



Base diameter Ø 7.10"

Part	Article-Nr.	Sp	TH	L	
978	97802Y	3/ -	6.86	5.51	0.63
978	97803Y		8.83	7.48	0.63
979	97903Y	1-8	8.83	7.48	0.75
979	97904Y		11.19	9.84	0.75
980	98003Y	1 1/ -	8.83	7.48	0.95
980	98004Y		11.19	9.84	0.95
980	98005Y		13.16	11.81	0.95

LBS 8500

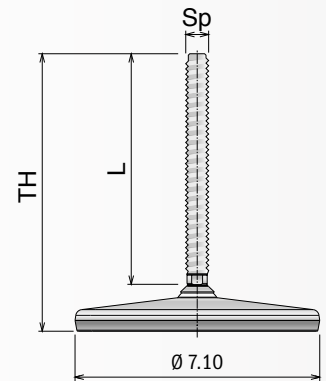


Easy clean SERIES

with anchor hole

Available Diameter:

Ø 3.00" - Ø 4.00"

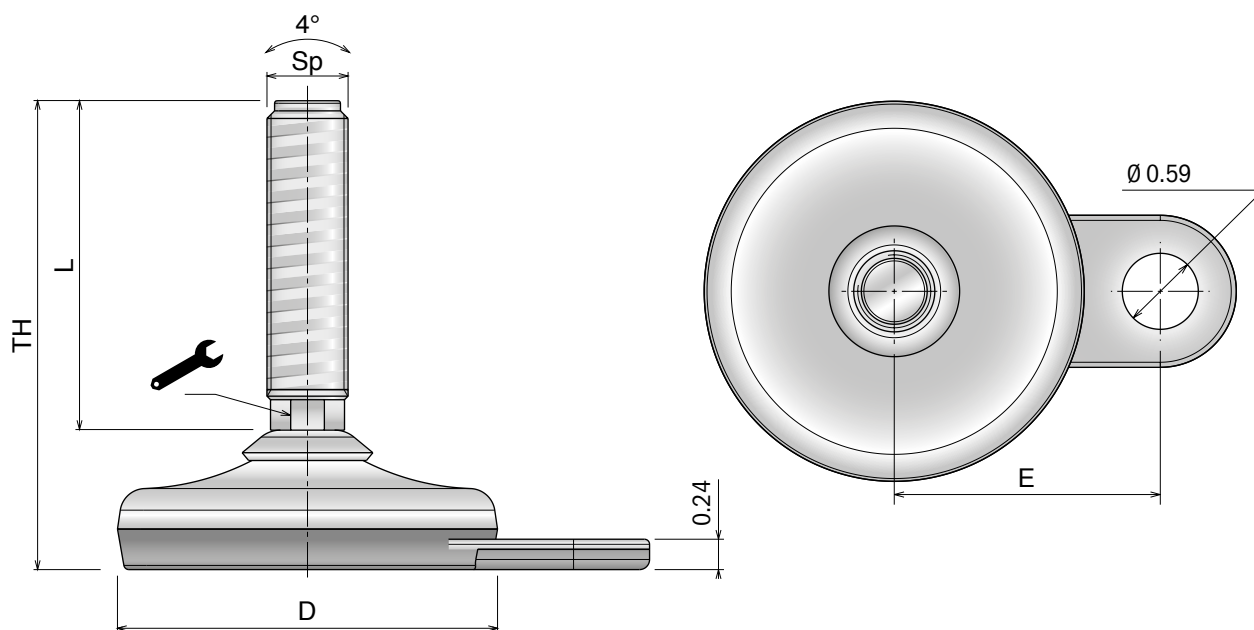

Material

Base: Stainless steel AISI 304
and vulcanized rubber

Spindle and washer: Stainless steel AISI 304

Rubber: 70 Shore hardness

Accessories - Stainless steel nuts

Part	Article-Nr.	Spindle
998	99802Y	1/ -
998	99804Y	/ -
998	99805Y	3/ -
998	99806Y	1-8




Ø 3.00"



Base diameter **Ø 3.00"**

Part	Article-Nr.	Sp	TH	L	
934	93402Y	1/ -	4.13	2.95	0.35
934	93403Y		6.10	4.92	0.35
935	93502Y	/ -	5.70	4.53	0.51
935	93503Y		7.68	6.50	0.75
936	93603Y	3/ -	6.69	5.51	0.63

 **LBS** 1800

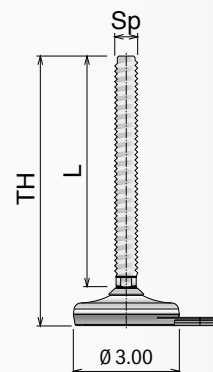


Ø 4.00"



Base diameter **Ø 4.00"**

Part	Article-Nr.	Sp	TH	L	
937	93702Y	/ -	5.90	4.53	0.51
937	93703Y		7.87	6.50	0.51
938	93802Y	3/ -	6.89	5.51	0.63
938	93803Y		8.86	7.48	0.63
939	93903Y	1-8	8.86	7.48	0.75




 **LBS** 4500

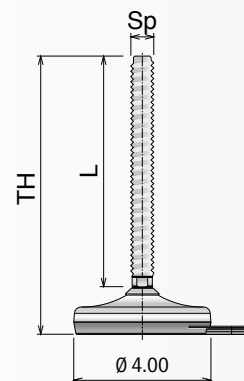

Easy clean SERIES *with thread cover*

Available Diameter:

Ø 2.00" - Ø 2.60" - Ø 3.00" - Ø 4.00" - Ø 5.00" - Ø 5.90" - Ø 7.10"

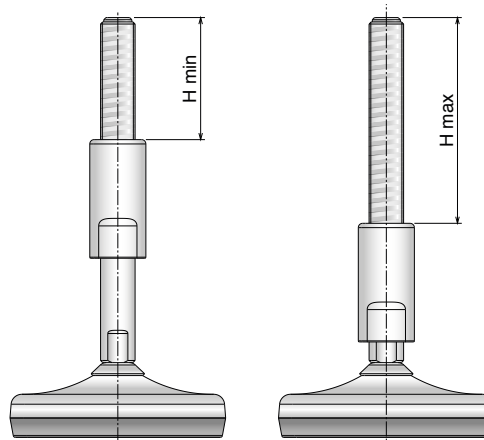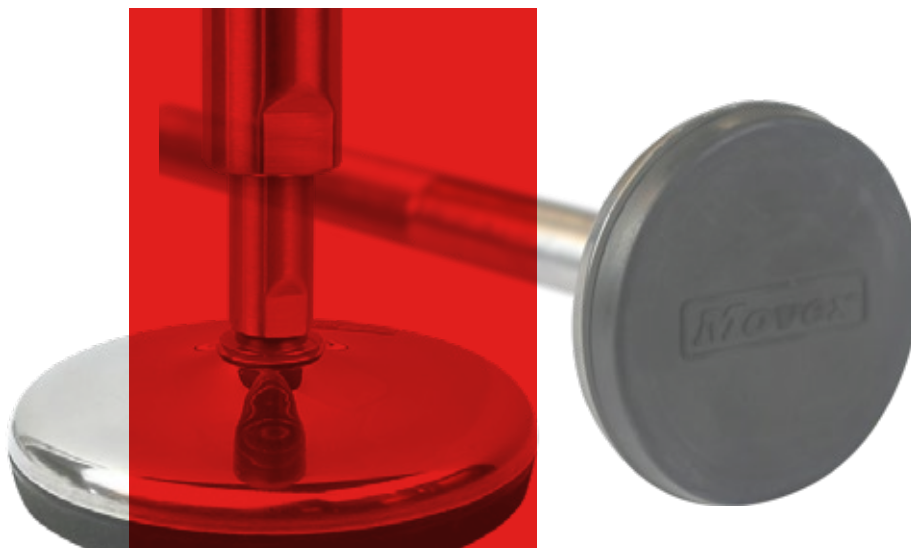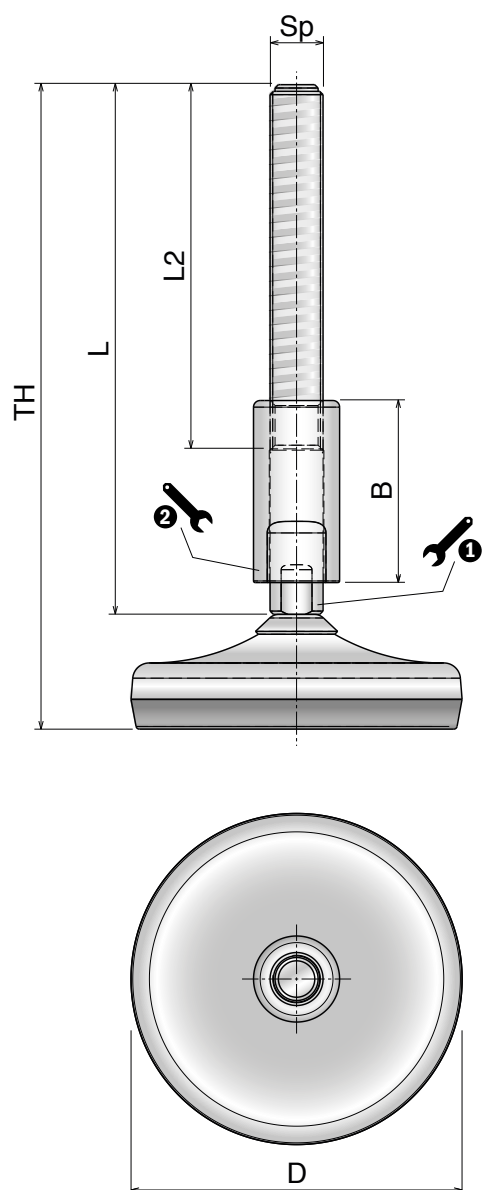

Material

Base: Stainless steel AISI 304
and vulcanized rubber

Spindle and washer: Stainless steel AISI 304

Rubber: 70 Shore hardness

Accessories - Stainless steel nuts

Part	Article-Nr.	Spindle
998	99804Y	/ -
998	99805Y	³ / -
998	99806Y	1-8



Adjustment range

Dimensions	H min	H max
L: 6.3 / B: 2.16	2.23	3.75
L: 8.26 / B: 3.34	1.79	4.50


Ø 2.00"



Base diameter **Ø 2.00"**

Part	Article-Nr.	Sp	TH	L	L2	B	1	2
985	98501Y	/-	7.28	6.30	4.33	2.16	0.51	0.74
985	98502Y		9.25	8.26	5.12	3.34	0.51	0.74
985	98503Y	3/-	7.28	6.30	4.33	2.16	0.63	0.94
985	98504Y		9.25	8.26	5.12	3.34	0.63	0.94
985	98505Y	1-8	7.28	6.30	4.33	2.16	0.74	1.06
985	98506Y		9.25	8.26	5.12	3.34	0.74	1.06

LBS 675

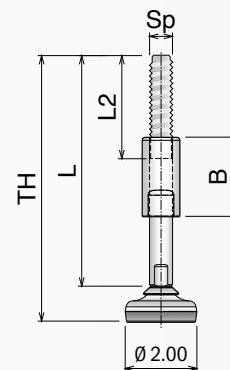


Ø 2.60"



Base diameter **Ø 2.60"**

Part	Article-Nr.	Sp	TH	L	L2	B	1	2
986	98601Y	/-	7.67	6.30	4.33	2.16	0.51	0.74
986	98602Y		9.64	8.26	5.12	3.34	0.51	0.74
986	98603Y	3/-	7.67	6.30	4.33	2.16	0.63	0.94
986	98604Y		9.64	8.26	5.12	3.34	0.63	0.94
986	98605Y	1-8	7.67	6.30	4.33	2.16	0.74	1.06
986	98606Y		9.64	8.26	5.12	3.34	0.74	1.06

LBS 1200

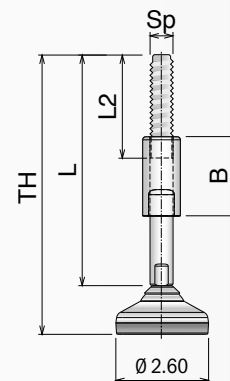


Ø 3.00"



Base diameter **Ø 3.00"**

Part	Article-Nr.	Sp	TH	L	L2	B	1	2
987	98701Y	/-	7.48	6.30	4.33	2.16	0.51	0.74
987	98702Y		9.44	8.26	5.12	3.34	0.51	0.74
987	98703Y	3/-	7.48	6.30	4.33	2.16	0.63	0.94
987	98704Y		9.44	8.26	5.12	3.34	0.63	0.94
987	98705Y	1-8	7.48	6.30	4.33	2.16	0.74	1.06
987	98706Y		9.44	8.26	5.12	3.34	0.74	1.06

LBS 1800

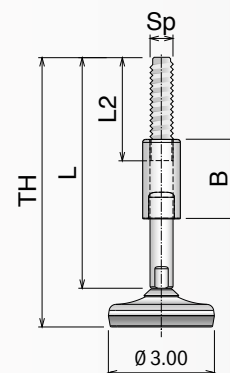


Ø 4.00"



Base diameter **Ø 4.00"**

Part	Article-Nr.	Sp	TH	L	L2	B	1	2
988	98801Y	/-	7.67	6.30	4.33	2.16	0.51	0.74
988	98802Y		9.64	8.26	5.12	3.34	0.51	0.74
988	98803Y	3/-	7.67	6.30	4.33	2.16	0.63	0.94
988	98804Y		9.64	8.26	5.12	3.34	0.63	0.94
988	98805Y	1-8	7.67	6.30	4.33	2.16	0.74	1.06
988	98806Y		9.64	8.26	5.12	3.34	0.74	1.06

LBS 4500

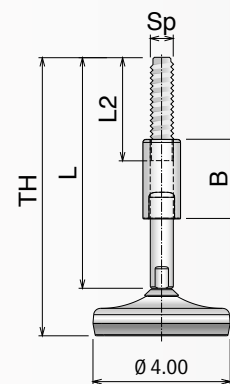


Ø 5.00"



Base diameter Ø 5.00"

Part	Article-Nr.	Sp	TH	L	L2	B	1	2
989	98901Y	/-	7.67	6.30	4.33	2.16	0.51	0.74
989	98902Y		9.64	8.26	5.12	3.34	0.51	0.74
989	98903Y	3/-	7.67	6.30	4.33	2.16	0.63	0.94
989	98904Y		9.64	8.26	5.12	3.34	0.63	0.94
989	98905Y	1-8	7.67	6.30	4.33	2.16	0.74	1.06
989	98906Y		9.64	8.26	5.12	3.34	0.74	1.06

LBS 6750

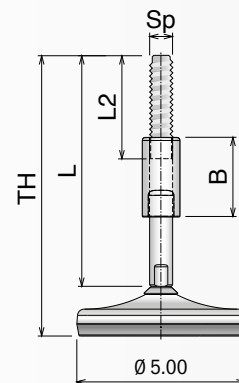


Ø 5.90"



Base diameter Ø 5.90"

Part	Article-Nr.	Sp	TH	L	L2	B	1	2
990	99001Y	/-	7.67	6.30	4.33	2.16	0.51	0.74
990	99002Y		9.64	8.26	5.12	3.34	0.51	0.74
990	99003Y	3/-	7.67	6.30	4.33	2.16	0.63	0.94
990	99004Y		9.64	8.26	5.12	3.34	0.63	0.94
990	99005Y	1-8	7.67	6.30	4.33	2.16	0.74	1.06
990	99006Y		9.64	8.26	5.12	3.34	0.74	1.06

LBS 7800

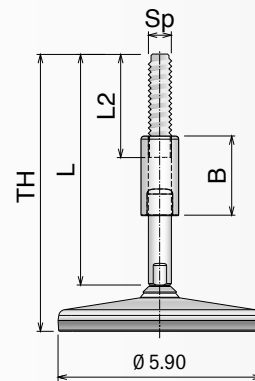


Ø 7.10"



Base diameter Ø 7.10"

Part	Article-Nr.	Sp	TH	L	L2	B	1	2
991	99101Y	/-	7.67	6.30	4.33	2.16	0.51	0.74
991	99102Y		9.64	8.26	5.12	3.34	0.51	0.74
991	99103Y	3/-	7.67	6.30	4.33	2.16	0.63	0.94
991	99104Y		9.64	8.26	5.12	3.34	0.63	0.94
991	99105Y	1-8	7.67	6.30	4.33	2.16	0.74	1.06
991	99106Y		9.64	8.26	5.12	3.34	0.74	1.06

LBS 8500


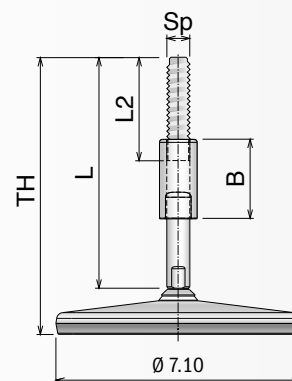


Easy clean SERIES

with anchor hole
and thread cover

Available Diameter:

Ø 3.00" - Ø 4.00"

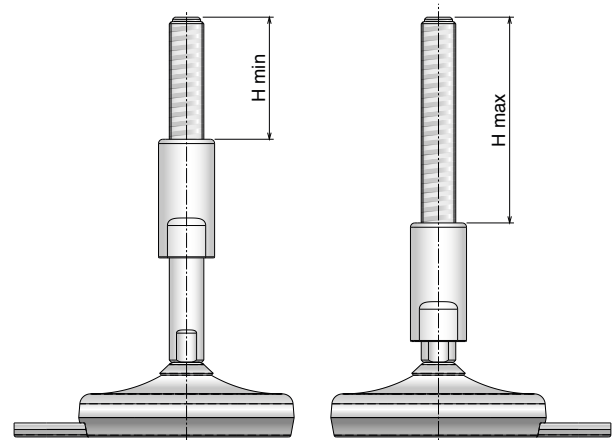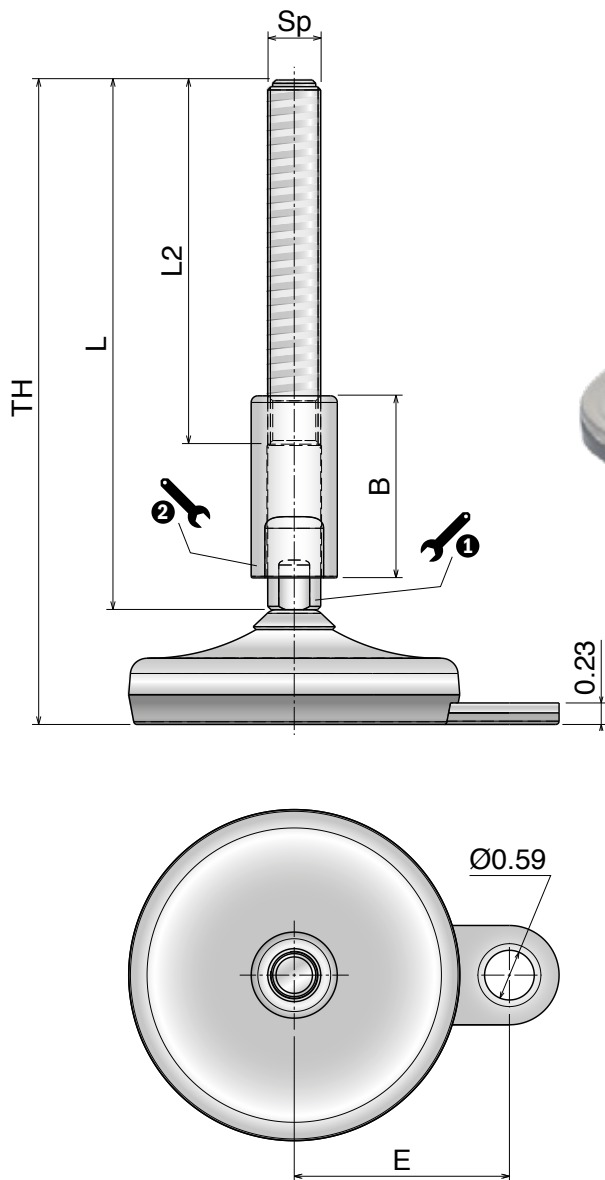

Material

Base: h steel AISI 304
and vulcanized rubber

Spindle and washer: Stainless steel AISI 304

Rubber: 70 Shore hardness

Accessories - Stainless steel nuts

Part	Article-Nr.	Spindle
998	99804Y	/ -
998	99805Y	³ / -
998	99806Y	1-8



Adjustment range

Dimensions	H min	H max
L: 6.3 / B: 2.16	2.23	3.75
L: 8.26 / B: 3.34	1.79	4.50


Ø 3.00"



Base diameter **Ø 3.00"**

Part	Article-Nr.	Sp	TH	L	L2	B	E	1	2
992	99201Y	/-	7.48	6.30	4.33	2.16	2.06	0.51	0.74
992	99202Y		9.44	8.26	5.12	3.34	2.06	0.51	0.74
992	99203Y	3/-	7.48	6.30	4.33	2.16	2.06	0.63	0.94
992	99204Y		9.44	8.26	5.12	3.34	2.06	0.63	0.94
992	99205Y	1-8	7.48	6.30	4.33	2.16	2.06	0.74	1.06
992	99206Y		9.44	8.26	5.12	3.34	2.06	0.74	1.06

LBS 1800

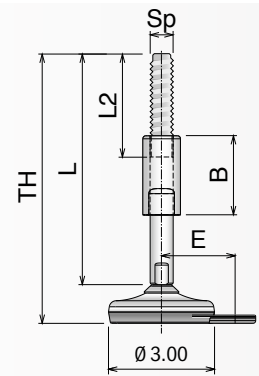


Ø 4.00"



Base diameter **Ø 4.00"**

Part	Article-Nr.	Sp	TH	L	L2	B	E	1	2
993	99301Y	/-	7.67	6.30	4.33	2.16	2.56	0.51	0.74
993	99302Y		9.64	8.26	5.12	3.34	2.56	0.51	0.74
993	99303Y	3/-	7.67	6.30	4.33	2.16	2.56	0.63	0.94
993	99304Y		9.64	8.26	5.12	3.34	2.56	0.63	0.94
993	99305Y	1-8	7.67	6.30	4.33	2.16	2.56	0.74	1.06
993	99306Y		9.64	8.26	5.12	3.34	2.56	0.74	1.06

LBS 4500

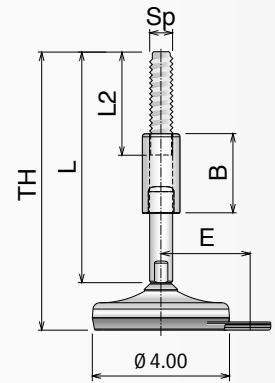

Notes

Notes

Notes

Easy clean

SERIES

www.movexii.com



beltservice.com | 800-727-2358 | sales@beltservice.com

BSP1920
REV_7_18