


FABLON / FABSYN
HEAVY DUTY AND FOOD GRADE CUSTOM BELTS



FABLON SPECIAL PROFILES


TOP FLIGHT™

- 3/16" high cleats
- 6" lateral centers / 4" longitudinal centers
- Raised corner buttons for drainage
- Eliminate roll-back
- Operates like a flat belt
- No special idlers required
- Custom constructions are available

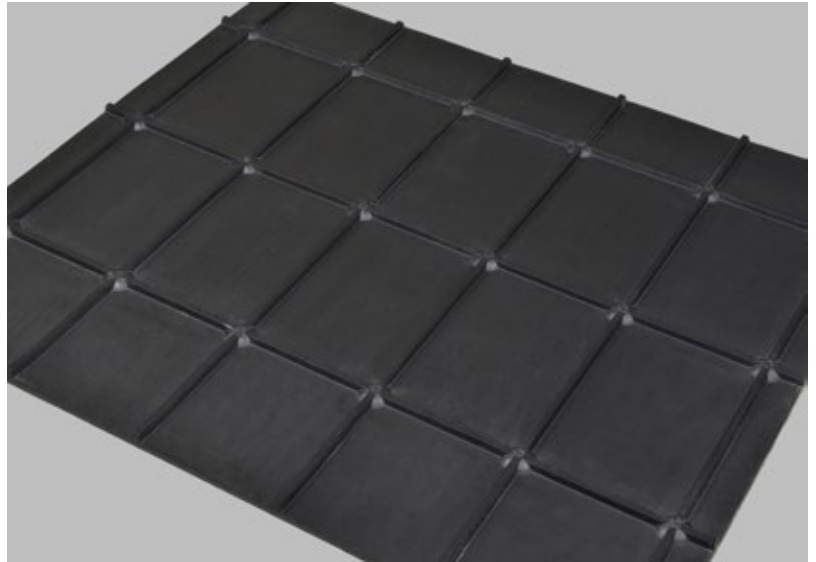

CROSSTOP™



- 3/8" x 3/8" cleats taper to 1/4"
- 8" x 8" pattern
- Constant support from return idlers
- Efficient water drainage and easy cleaning
- Operates like a flat belt
- No special return idlers required
- Custom constructions are available

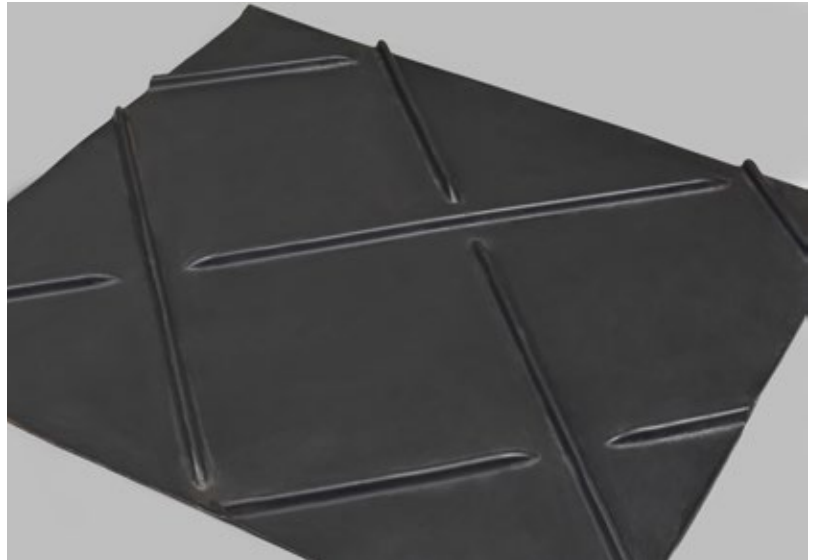

Heavy-Duty Synthetic Fabric With High-Grade Covers and Cleats

Belt Description	Covers	Cover Compound	Oil Resistance	Total Belt Thickness	Wt. Per Sq. Ft.	Temp. Range °F	Min. Pulley Diameter	Fasteners Flexco / Clipper	Working Strength (PIW)
Fablon Top Flight	1/8" x FS	MORS	Moderate	7/16"	1.47 lbs	-20° / 180°	6"	#62, #125 / #3	150 lbs
Fablon Crosstop	1/8" x FS	MORS	Moderate	9/16"	1.47 lbs	-20° / 180°	6"	#62, #125 / #3	150 lbs

FABLON CLEATED BELTS

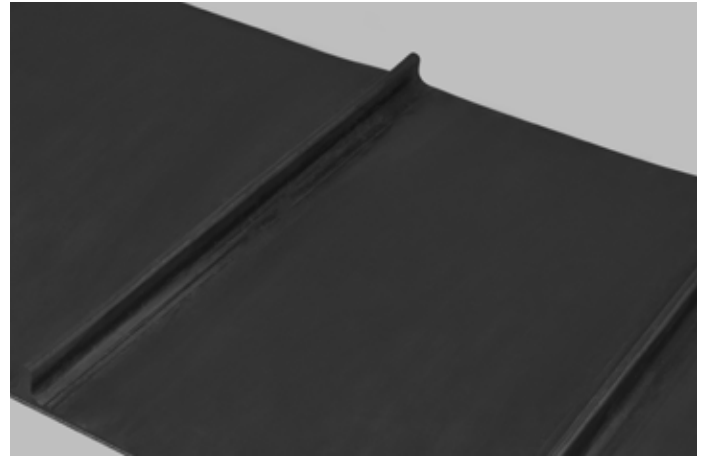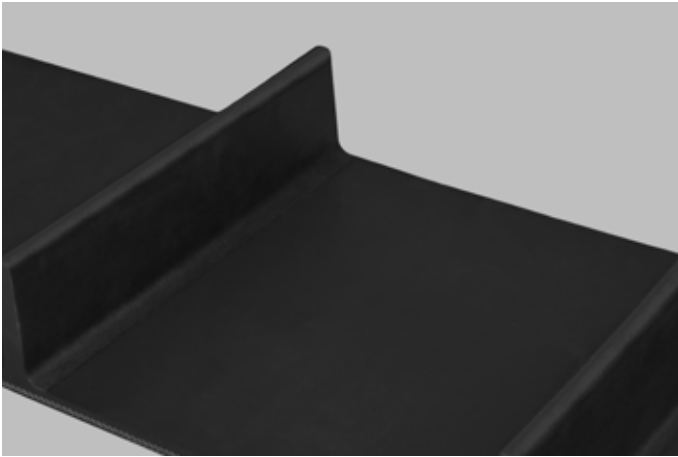

150 SERIES

- 4 cleat heights
- 12" centers
- 4 belt covers
- -20 to 180°F

220 SERIES


- 2 cleat heights
- 12" centers
- 4 belt covers
- -20 to 180°F

Belt	Covers, Skims and Cleats	10 to 1 Safety Factor	Integrally Molded	50% Smaller Pulleys	Quick Delivery	Competitive Pricing	Specialty Compounds
SBR Fablon	✓	✓	✓	✓	✓	✓	
MOR Fablon	✓	✓	✓	✓	✓		✓

FABFLEX®
A DIVISION OF BELTSERVICE CORPORATION






One-Piece Construction

Cover, cleats and belt are molded in one operation 48-inches wide and cut to desired widths.

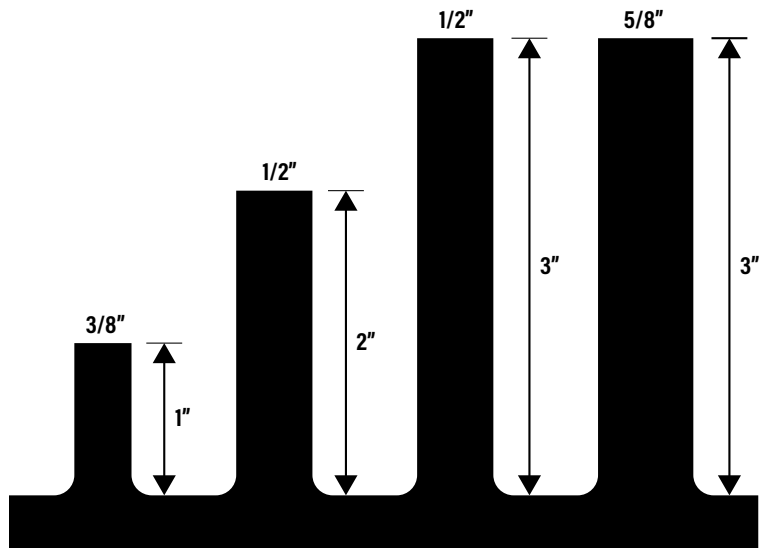

Stock Cleat Options

FABLON CUSTOM BELTING

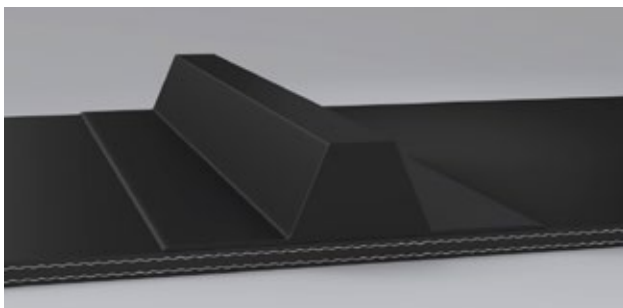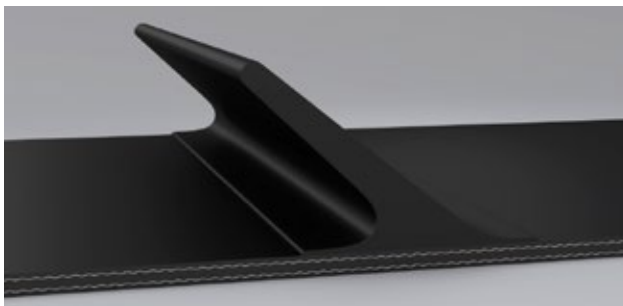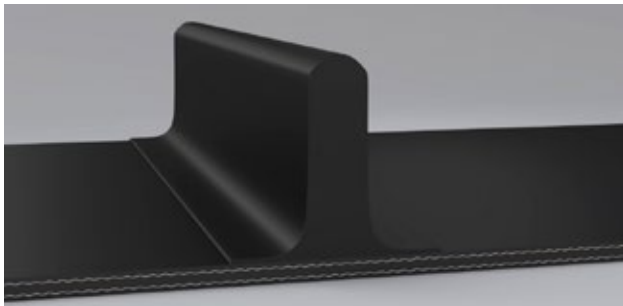

STRAIGHT CLEATS *(Available on Fablon 150 or 220)*

Height	1/4" to 3"
Thickness	3/8" (SD), 1/2" (MD), 5/8" (HD)
Spacing	Centers of 4" to 24"
Options	Recessing, Notching, Shaping

SCOOP CLEATS *(Available on Fablon 150 or 220)*

Height	1" to 3"
Thickness	Varied
Spacing	Centers of 4" min. - Custom spacing available
Options	Manufactured to customer's specifications

V-GUIDES

Sections	A, B, C or D
Options	Solid or Notched

VANNER EDGES *(Straight or Sloped)*

Straight Height	1/2", 3/4", 1-1/2"
Sloped Height	1/2" and 1"
Thickness	Straight edge: 3/8"

BELT LACING & SPLICING

Design Specs.	Manufactured to customer's specifications
Options	Prepared ends or manufactured endless

NEED CUSTOM CLEATS?

► Call us today: **800-727-2358**

FABSYN SPECIAL PROFILES



CORRUGATED™

Height	1/16" rounded ribs
Spacing	1/4" center to center
Features	<ul style="list-style-type: none"> • Provides positive discharge for sliced and diced food products

ASENDOR™

Height	1/8" rounded ribs
Spacing	1" center to center
Features	<ul style="list-style-type: none"> • Reduces product bruising • Reduces resonance on return idlers

TOP FLIGHT™ *(Operates like a flat belt)*

Height	3/16" cleats
Pattern Size	4" x 6"
Features	<ul style="list-style-type: none"> • Raised corner buttons for drainage • Eliminate roll-back issue

CROSS TOP™ *(Operates like a flat belt)*

Height	3/8" cleats
Pattern Size	8" x 8"
Features	<ul style="list-style-type: none"> • Constant belt support from return idlers • Great water drainage and easy cleaning


Belt Description	Covers	Total Belt Thickness	Wt. Per Sq. Ft.	Temp Range °F	Min. Pulley Dia.	Fasteners Flexco	Fasteners Clipper	Weight (PIW)
2 ply FABSYN COS Corrugated™	1/32" x FS	3/16"	.82 lbs	0° / 220°	2"	62 or 7	1 or 2	100 lbs
2 ply FABSYN COS Asendor™	1/32" x FS	1/4"	.82 lbs	0° / 220°	2"	62 or 7	1 or 2	100 lbs
2 ply FABSYN COS Top Flight™	3/64" x FS	5/16"	1.14 lbs	0° / 220°	2"	62	2	100 lbs
2 ply FABSYN COS Crosstop™	3/64" x FS	1/2"	1.14 lbs	0° / 220°	2"	62	2	100 lbs

FABSYN CLEATED BELTS



150 SERIES

- 1-1/2" x 3/8" cleats • 12" centers
- 0 to 220° F

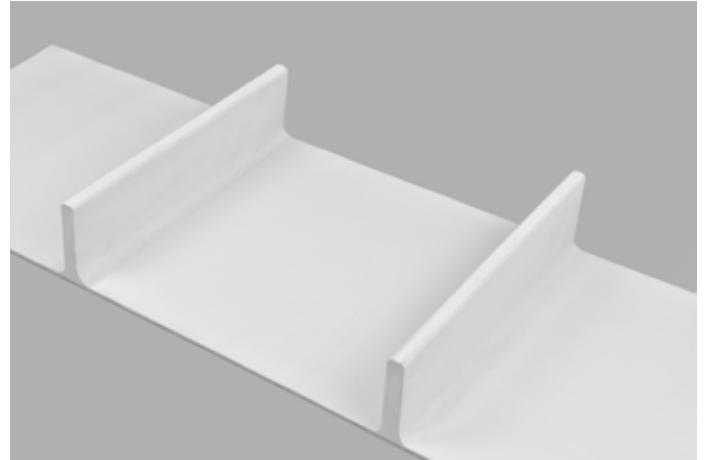


220 SERIES

- 2-1/2" x 3/8" cleats • 12" centers
- 0 to 220° F

Synthetic Fabric with Oil-Resistant Nitrile Covers and Cleats

Belt	FDA Approved	No Odor or Taste Transfer	Integrally Molded	50% Smaller Pulleys	Quick Delivery	Competitive Pricing	Specialty Compounds
Nitrile Fabsyn	✓	✓	✓	✓	✓	✓	✓

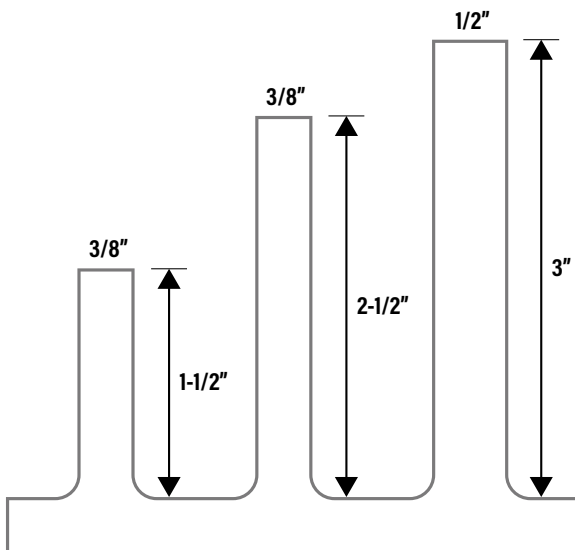


Stock Cleat Options

FABFLEX®
A DIVISION OF BELTSERVICE CORPORATION

One-Piece Construction


Cover, cleats and belt are molded in one operation 48-inches wide and cut to desired widths.

FABSYN CUSTOM BELTING

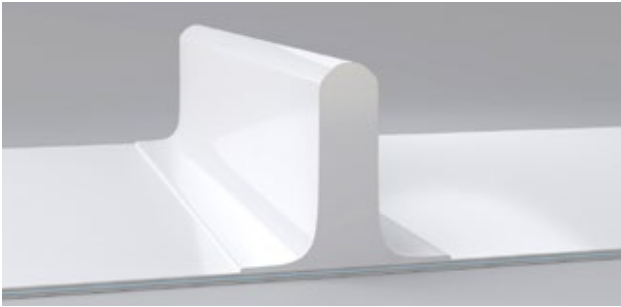


STRAIGHT CLEATS *(Available on Fabsyn 100 or 150)*

Height	1/4" to 3"
Thickness	3/8" (SD) , 1/2" (MD) , 5/8" (HD)
Spacing	Centers of 4" to 24"
Options	Recessing, Notching, Shaping

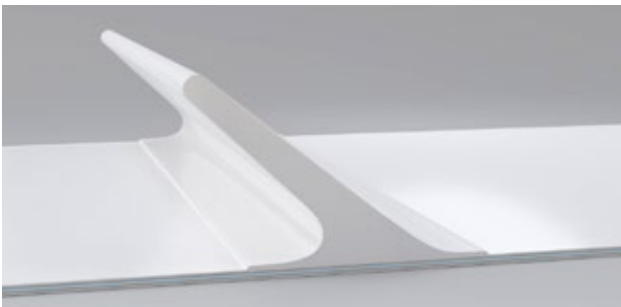


SCOOP CLEATS *(Available on Fabsyn 100 or 150)*

Height	1" to 3"
Thickness	Varied
Spacing	Centers of 4" min. - Custom spacing available
Options	Manufactured to customer's specifications

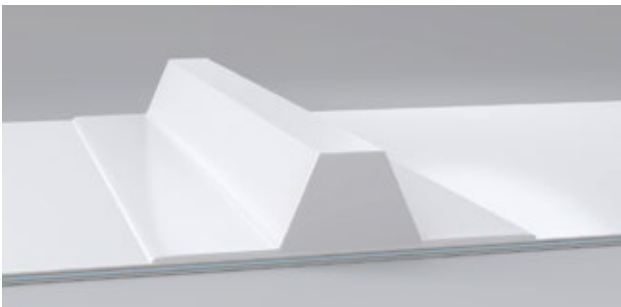

V-GUIDES

Sections	A, B, C or D
Thickness	Solid or Notched

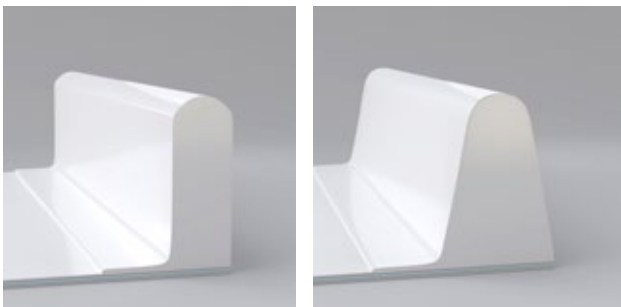

VANNER EDGES *(Straight or Sloped)*

Straight Height	1/2" , 3/4" , 1-1/2"
Sloped Height	1/2" and 1"
Thickness	Straight edge: 3/8"

NEED CUSTOM CLEATS?

► Call us today: **800-727-2358**

BELT LACING & SPLICING

Design Specs.	Manufactured to customer's specifications
Options	Prepared ends or manufactured endless

Black Fablon

Part #	Base Belt	Cleat Height	Cleat Thickness	Cleat Spacing	Min. Pulley	Thickness	Weight (PIW)
25253	2ply 150 1/32" x 1/32" 2" MD	2"	1/2"	12"	6"	3/16"	.1420 lbs
25263	2ply 220 1/8" x FS 2" MD	2"	1/2"	12"	8"	1/4"	.1830 lbs
25266	2ply 220 1/8" x 1/16" 3" HD	3"	5/8"	12"	8"	9/32"	.2510 lbs
25250	2ply 150 1/32" x 1/32" 1" SD	1"	3/8"	12"	4"	3/16"	.1090 lbs
25257	2ply 150 1/16" x FS 2" MD	2"	1/2"	12"	6"	3/16"	.1420 lbs
25258	2ply 150 1/16" x FS 3" MD	3"	1/2"	12"	6"	3/16"	.2010 lbs
25264	2ply 220 1/8" x FS 3" HD	3"	5/8"	12"	8"	1/4"	.2920 lbs
25259	2ply 150 1/8" x FS MOR Top Flight	3/16"	--	--	6"	7/16"	.1230 lbs
25260	2ply 150 1/8" x FS MOR Crosstop	3/8"	--	--	6"	9/16"	.1230 lbs

BULLHORN

25261	2ply 220 3/16" x 1/16" w/ 24" Pattern. 36" Belt width	1/2"	1/2"	6"	8"	3/8"	.2750 lbs
25261	2ply 220 3/16" x 1/16" w/ 30" Pattern. 42" Belt width	1/2"	1/2"	6"	8"	3/8"	.2750 lbs
25262	2ply 400 3/16" x 1/16" w/ 24" Pattern. 36" Belt width	1/2"	1/2"	6"	8"	3/8"	.2950 lbs
25262	2ply 400 3/16" x 1/16" w/ 30" Pattern. 42" Belt width	1/2"	1/2"	6"	8"	3/8"	.2950 lbs

FABLIFT

41052	3ply 225 3/16" x 1/16" w/ 24-1/2" Pattern. 36" Belt width	1"	1"	10"	8"	25/64"	.3650 lbs
41052	3ply 225 3/16" x 1/16" w/ 30-1/2" Pattern. 42" Belt width	1"	1"	10"	8"	25/64"	.3650 lbs

FABCLIMB

49052	3ply 225 3/16" x 1/16" w/ 17-1/2" Pattern. 31-1/2" Belt width	1-1/4"	--	10"	8"	3/8"	.2950 lbs
30673	3ply 225 3/16" x 1/16" w/ 23-3/4" Pattern. 39-3/8" Belt width	1-1/4"	--	14"	8"	7/16"	.4200 lbs
25856	3ply 225 3/16" x 1/16" w/ 31-1/2" Pattern. 47-1/4" Belt width	1-1/4"	--	19"	8"	7/16"	.3200 lbs

White Fabsyn

Part #	Base Belt	Cleat Height	Cleat Thickness	Cleat Spacing	Min. Pulley	Thickness	Weight
25236	2ply Fabsyn COS 1-1/2" SD	1-1/2"	3/8"	6"	6"	1/8"	.1330 lbs
25237	2ply Fabsyn COS 1-1/2" SD	1-1/2"	3/8"	12"	6"	1/8"	.1010 lbs
27618	2ply Fabsyn COS 2-1/2" SD	2-1/2"	3/8"	6"	6"	1/8"	.1670 lbs
25239	2ply Fabsyn COS 2-1/2" SD	2-1/2"	3/8"	12"	4"	1/8"	.1170 lbs
25241	3ply Fabsyn COS 1-1/2" SD	1-1/2"	3/8"	12"	6"	11/64"	.1670 lbs
25243	3ply Fabsyn COS 1-1/2" SD	1-1/2"	3/8"	12"	4"	11/64"	.1250 lbs
25248	3ply Fabsyn COS 2-1/2" SD	2-1/2"	3/8"	12"	4"	11/64"	.1340 lbs
25363	2ply Fabsyn Corrugated	1/16"	--	1/4"	2"	7/64"	.0830 lbs
25233	2ply Fabsyn Asendor	1/8"	--	1"	2"	7/64"	.0830 lbs
25234	2ply Fabsyn Top Flight 4" x 6" Rectangle	3/16"	--	--	2"	11/32"	.0950 lbs
25235	2ply Fabsyn Crosstop 8" x 8" Diamond Patten	3/8"	--	--	2"	1/2"	.0950 lbs



4143 Rider Trail North | Earth City, MO 63045
 314-344-8500 | 800-727-2358 | Fax: 314-344-8511
 beltservice.com | info@beltservice.com

