

<b>Catalog #</b> <b>72a</b> <b>Item number:</b> <b>49520</b> <b>Description:</b> 2 Ply 160 1/16in x 1/64in Grape Belt <b>International Designation:</b> N/A		<b>Pulley Diameter, Minimum</b> Min. Pulley Dia. - Head @ 80 - 100% Tension 6.00 in Min. Pulley Dia. - Head @ 60 - 79% Tension 6.00 in Min. Pulley Dia. - Head @ 59% Tension or Below 6.00 in Minimum Pulley Diameter- Tail 6.00 in
<b>Construction:</b> Compound Top Cover Black SBR Color Black Top Cover Thickness (in) (1.59 mm) 1/16 in Top Cover Description Smooth Compound Bottom Cover Black SBR Bottom Cover Thickness (in) (0.40 mm) 1/64 in Bottom Cover Description Smooth Number of Plies 2 Overall Gauge (in) (4.37 mm) 11/64 in Unit Weight- lb/PIW 0.0900 lbs/PIW Carcass Type Poly/Nylon Compound Black SBR Temperature Range (°F)- High 225 °F Temperature Range (°F)- Low -25 °F		<b>Splice Instructions:</b> Splice Step Size 8.00 in Splice Process Step Hot
<b>Belt Strength:</b> Tension Rating (PIW) 160 PIW		<b>Other:</b> Static Conducting No Cross Rigid No High Heat No Impression Top No Oil Resistant No Fire Resistant No FDA Approved No
<b>Special Characteristics:</b> N/A		<b>Suggested Fasteners:</b> Flexco Plate/Rivet N/A Flexco Hinged N/A Alligator Staple #125 Clipper Lace N/A Alligator Lace N/A
*****All Values are nominal and subject to change without notice.*****		

<b>St. Louis, MO</b> 800-727-2358 314-344-8500	<b>Boise, ID</b> 800-423-4469 208-342-4681	<b>Charlotte, NC</b> 800-849-2358 704-949-2100	<b>Grand Prairie, TX</b> 800-727-2358 314-344-8555	<b>Philadelphia, PA</b> 800-777-1314 215-295-1900	<b>Sacramento, CA</b> 800-289-2358 916-419-7191	<b>Vancouver, WA</b> 800-234-2358 360-567-4280	<b>Beltservice Canada</b> 877-210-7423 905-565-9217	<b>Beltservice de Mexic</b> +52 55 53620434 +44 2980 3266
--	--	--	--	---	---	--	---	---

# GRADE 2


2 PLY 160 PIW 1/16 X 1/64 GRAPE BELT

**72a**


Catalog Number

**49520**


Part Number

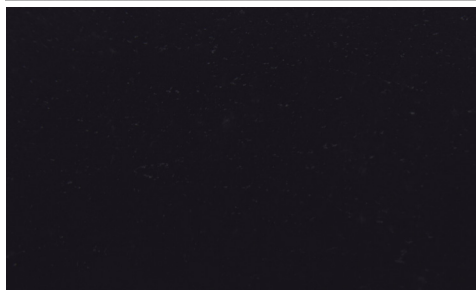

Top Cover View

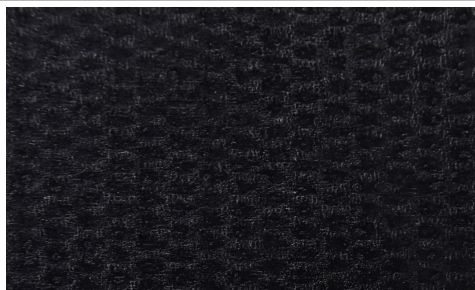

Bottom Cover View

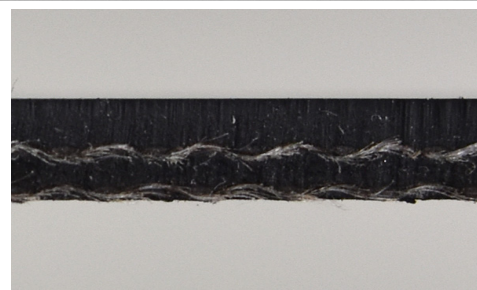

Ply View