

**Catalog #**                      **80d**
**Item number:**                **24157**
**Description:**

3 Ply 600 3/8in x 1/8in

**International Designation:**

N/A

**Pulley Diameter, Minimum**

Min. Pulley Dia. - Head @ 80 - 100% Tension                      24.00 in

Min. Pulley Dia. - Head @ 60 - 79% Tension                      20.00 in

Min. Pulley Dia. - Head @ 59% Tension or Below                      18.00 in

Minimum Pulley Diameter- Tail                      18.00 in

**Construction:**

Compound Top Cover                      Black SBR

Color                      Black

Top Cover Thickness (in)                      (9.53 mm) 3/8 in

Top Cover Description                      Smooth

Compound Bottom Cover                      Black SBR

Bottom Cover Thickness (in)                      (3.18 mm) 1/8 in

Bottom Cover Description                      Smooth

Number of Plies                      3

Overall Gauge (in)                      (18.03 mm) 45/64 in

Unit Weight- lb/PIW                      0.3400 lbs/PIW

Carcass Type                      Poly/Nylon

Compound                      Black SBR

Temperature Range (°F)- High                      225 °F

Temperature Range (°F)- Low                      -25 °F

**Splice Instructions:**

Splice Step Size                      16.00 in

Splice Process                      Step Hot

**Other:**

Static Conducting                      No

Cross Rigid                      No

High Heat                      No

Impression Top                      No

Oil Resistant                      No

Fire Resistant                      No

FDA Approved                      No

**Suggested Fasteners:**

Flexco Plate/Rivet                      BR-10/R6

Flexco Hinged                      N/A

Alligator Staple                      N/A

Clipper Lace                      N/A

Alligator Lace                      N/A

**Belt Strength:**

Tension Rating (PIW)                      600 PIW

**Special Characteristics:**

This belt offers high strength and impact resistance, coupled with abrasion resistance and long flex life. Used primarily on high-tension conveyors with long centers or in abusive situations.

\*\*\*\*\*All Values are nominal and subject to change without notice.\*\*\*\*\*

<b>St. Louis, MO</b>	<b>Boise, ID</b>	<b>Charlotte, NC</b>	<b>Grand Prairie, TX</b>	<b>Philadelphia, PA</b>	<b>Sacramento, CA</b>	<b>Vancouver, WA</b>	<b>Beltservice Canada</b>	<b>Beltservice de Mexic</b>
800-727-2358	800-423-4469	800-849-2358	800-727-2358	800-777-1314	800-289-2358	800-234-2358	877-210-7423	+52 55 53620434
314-344-8500	208-342-4681	704-949-2100	314-344-8555	215-295-1900	916-419-7191	360-567-4280	905-565-9217	+44 2980 3266

# GRADE 2


3 PLY 600 PIW 3/8 X 1/8

**80d**


Catalog Number

**24157**

Part Number



Top Cover View

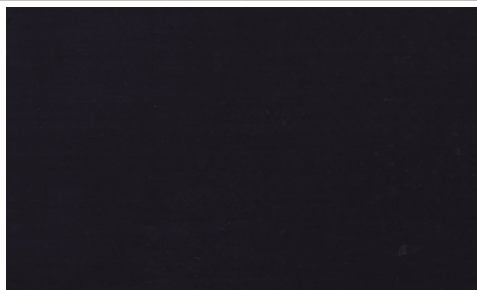

Bottom Cover View



Ply View



**BELTSERVICE**  
CORPORATION

[beltservice.com](http://beltservice.com)

REV 3/23