

Catalog # **83d**
Item number: **28586**
Description:

1 Ply 225 1/8in x 1/16in Straight Warp

International Designation:

N/A

Pulley Diameter, Minimum

Min. Pulley Dia. - Head @ 80 - 100% Tension 16.00 in

Min. Pulley Dia. - Head @ 60 - 79% Tension 14.00 in

Min. Pulley Dia. - Head @ 59% Tension or Below 10.00 in

Minimum Pulley Diameter- Tail 10.00 in

Construction:

Compound Top Cover Black SBR

Color Black

Top Cover Thickness (in) (3.18 mm) 1/8 in

Top Cover Description Smooth

Compound Bottom Cover Black SBR

Bottom Cover Thickness (in) (1.60 mm) 1/16 in

Bottom Cover Description Smooth

Number of Plies 1

Overall Gauge (in) (6.60 mm) 1/4 in

Unit Weight- lb/PIW 0.1400 lbs/PIW

Carcass Type Poly/Nylon

Compound Black SBR

Temperature Range (°F)- High 225 °F

Temperature Range (°F)- Low -25 °F

Splice Instructions:

Splice Step Size 0.00 in

Splice Process Finger

Other:

Static Conducting No

Cross Rigid No

High Heat No

Impression Top No

Oil Resistant No

Fire Resistant No

FDA Approved No

Suggested Fasteners:

Flexco Plate/Rivet R5

Flexco Hinged N/A

Alligator Staple N/A

Clipper Lace N/A

Alligator Lace N/A

Belt Strength:

Tension Rating (PIW) 225 PIW

Special Characteristics:

Premium Single-Ply Straight-Warp heavy duty belt designed specifically for the toughest conveying applications where low-stretch, impact-resistant, high-strength and excellent load support is required.

*****All Values are nominal and subject to change without notice.*****

St. Louis, MO	Boise, ID	Charlotte, NC	Grand Prairie, TX	Philadelphia, PA	Sacramento, CA	Vancouver, WA	Beltservice Canada	Beltservice de Mexic
800-727-2358	800-423-4469	800-849-2358	800-727-2358	800-777-1314	800-289-2358	800-234-2358	877-210-7423	+52 55 53620434
314-344-8500	208-342-4681	704-949-2100	314-344-8555	215-295-1900	916-419-7191	360-567-4280	905-565-9217	+44 2980 3266

GRADE 2



1 PLY 225 PIW 1/8 X 1/16 STRAIGHT WARP

83d

Catalog Number

28586

Part Number

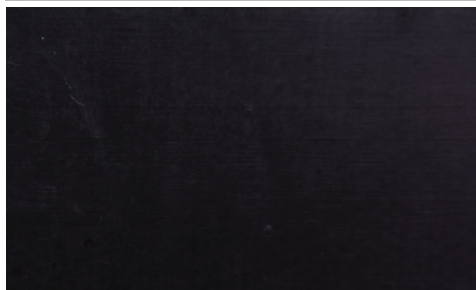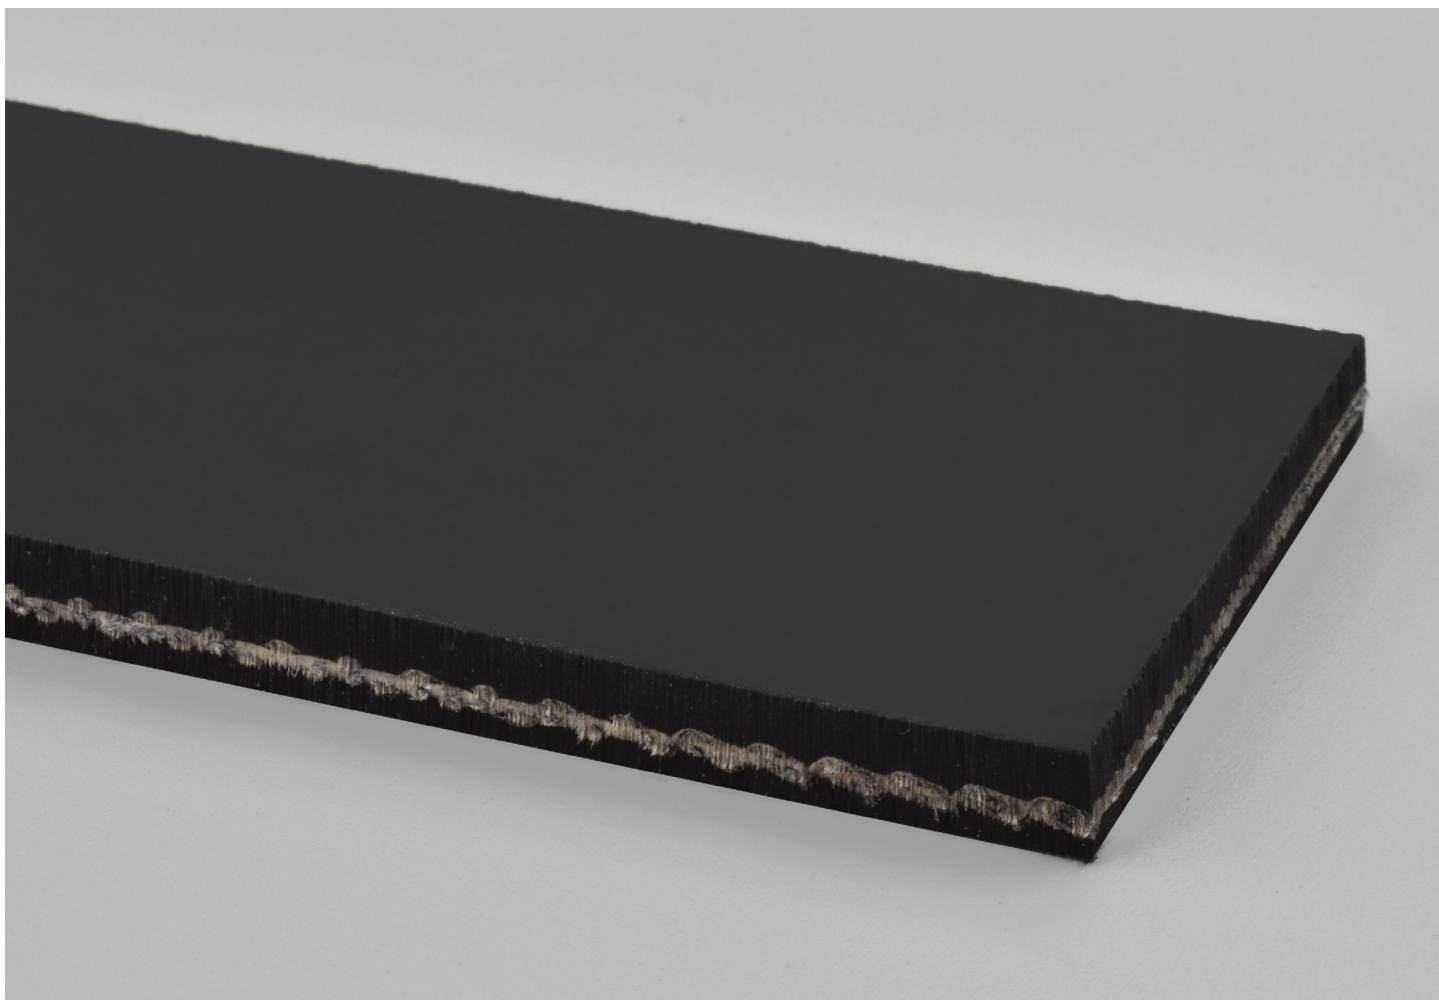

Top Cover View



Bottom Cover View



Ply View