

Catalog # **74c**
Item number: **10452**
Description:

2 Ply 220 5/32in x 3/32in FR-SBR

International Designation:

N/A

Pulley Diameter, Minimum

Min. Pulley Dia. - Head @ 80 - 100% Tension 16.00 in

Min. Pulley Dia. - Head @ 60 - 79% Tension 14.00 in

Min. Pulley Dia. - Head @ 59% Tension or Below 10.00 in

Minimum Pulley Diameter- Tail 10.00 in

Construction:

Compound Top Cover Black FR-SBR

Color Black

Top Cover Thickness (in) (4.06 mm) 5/32 in

Top Cover Description Smooth

Compound Bottom Cover Black FR-SBR

Bottom Cover Thickness (in) (2.38 mm) 3/32 in

Bottom Cover Description Smooth

Number of Plies 2

Overall Gauge (in) (9.65 mm) 3/8 in

Unit Weight- lb/PIW 0.2130 lbs/PIW

Carcass Type Poly/Nylon

Compound Black FR-SBR

Temperature Range (°F)- High 225 °F

Temperature Range (°F)- Low -25 °F

Splice Instructions:

Splice Step Size 8.00 in

Splice Process Step Hot

Other:

Static Conducting No

Cross Rigid No

High Heat No

Impression Top No

Oil Resistant No

Fire Resistant Yes

FDA Approved No

Suggested Fasteners:

Flexco Plate/Rivet #190/R5

Flexco Hinged #375 or 550

Alligator Staple N/A

Clipper Lace N/A

Alligator Lace N/A

Belt Strength:

Tension Rating (PIW) 220 PIW

Special Characteristics:

Meets the requirements of power plants where oil resistance is not required. Designed for above ground mining applications where flame resistance is required

*****All Values are nominal and subject to change without notice.*****

St. Louis, MO	Boise, ID	Charlotte, NC	Grand Prairie, TX	Philadelphia, PA	Sacramento, CA	Vancouver, WA	Beltservice Canada	Beltservice de Mexic
800-727-2358	800-423-4469	800-849-2358	800-727-2358	800-777-1314	800-289-2358	800-234-2358	877-210-7423	+52 55 53620434
314-344-8500	208-342-4681	704-949-2100	314-344-8555	215-295-1900	916-419-7191	360-567-4280	905-565-9217	+44 2980 3266

FLAME & OIL RESISTANT


2 PLY 220 PIW 5/32 X 3/32 FR-SBR

74c

Catalog Number

10452

Part Number

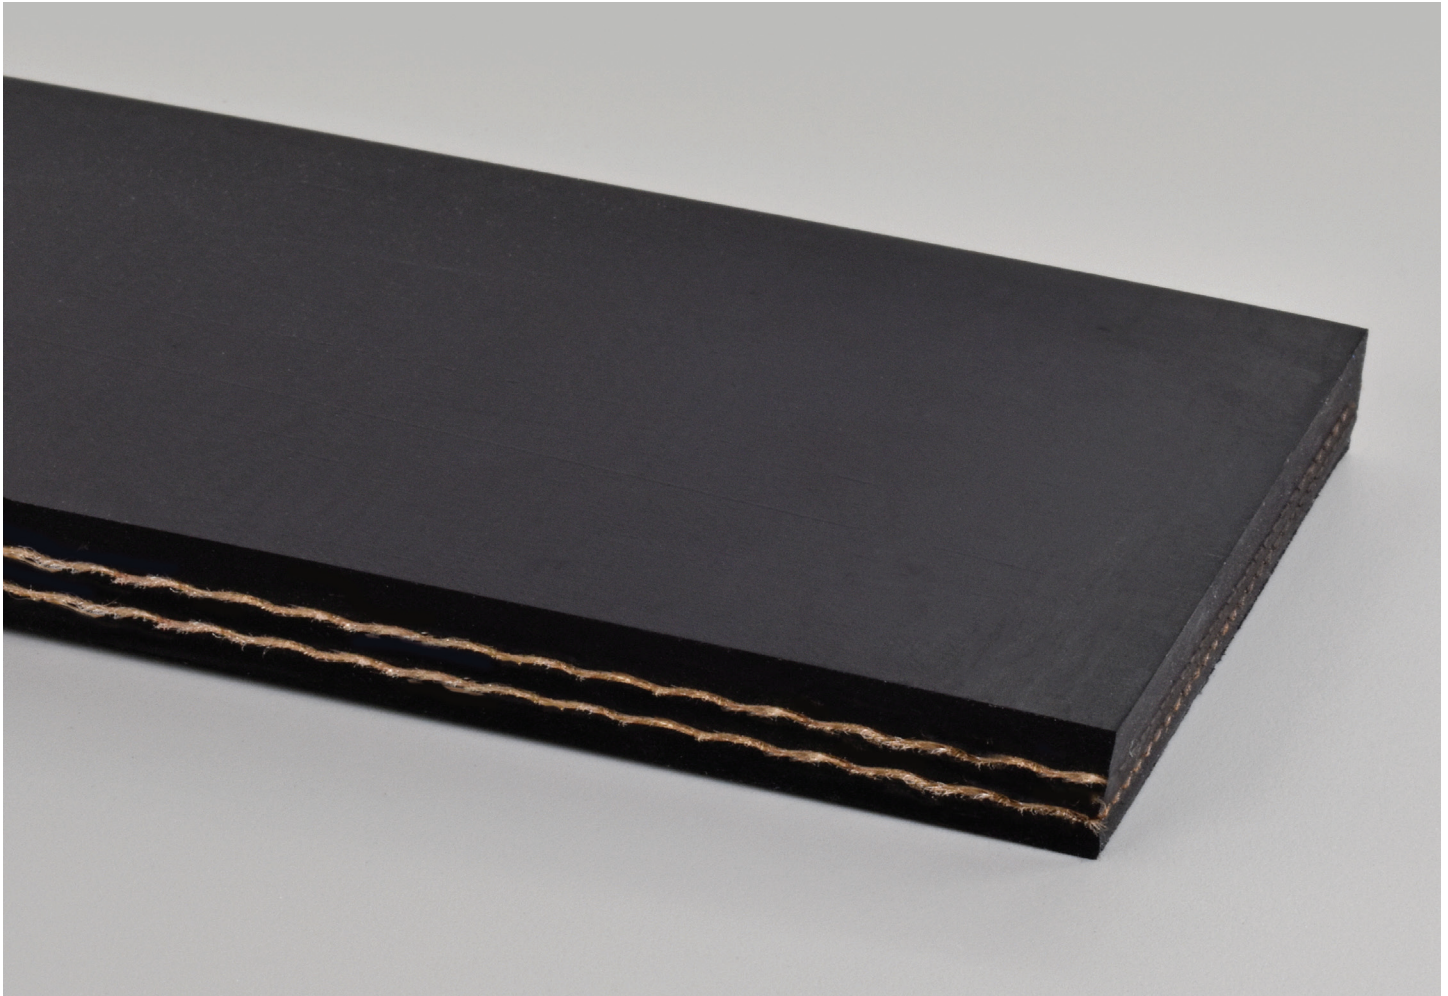

Top Cover View



Bottom Cover View



Ply View